




# 1 1/16" BORE STAINLESS STEEL CYLINDER

## SRR-17-□-□

Reverse Acting

Mount: Stud      Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"  
 Type: Rotating Rod      Spring Compressed: 7 lbs. Spring At Rest: 2 lbs.  
 Options: MB, B, H, W, V, N      For magnetic bumpers add .312


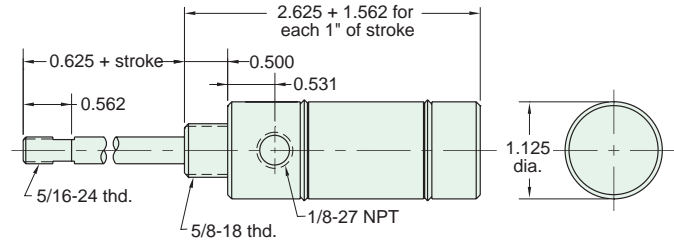


Nuts included, but not shown on drawing

## URR-17-□-□

Reverse Acting

Mount: Universal      Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"  
 Type: Rotating Rod      Spring Compressed: 7 lbs. Spring At Rest: 2 lbs.  
 Options: MB, B, H, W, V, P6, N      For magnetic bumpers add .312

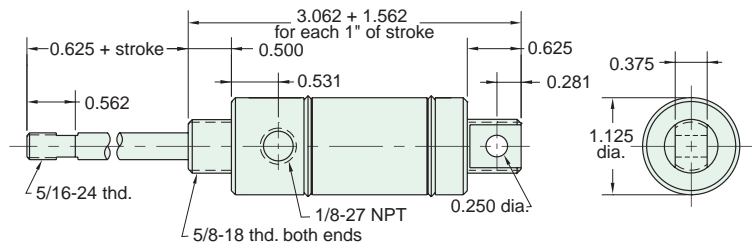


Furnished without nut(s). See Chart on Page 34.

## SFD-17-□-□

Spring Bias

Mount: Stud      Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"  
 Type: Double Rod      Spring Compressed: 7 lbs. Spring At Rest: 2 lbs.  
 Options: MB, B, H, W, V, P6, P7, P8, N      For magnetic bumpers add .312

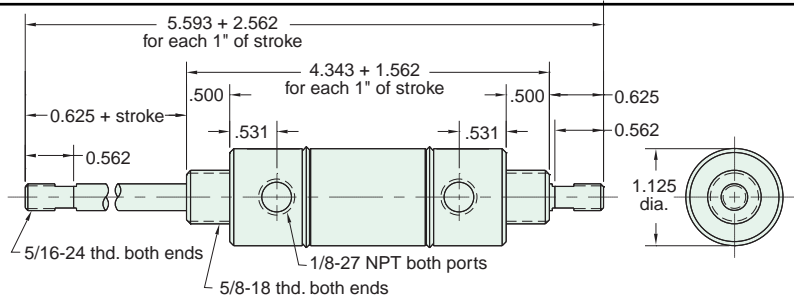


Nuts included, but not shown on drawing

## SBR-17-□-□

Double Acting Rear Spring Bias

Mount: Stud      Standard Stroke Lengths: 1/2", 1", 1-1/2", 2", 3", 4"  
 Type: Rotating Rod      Spring Compressed: 7 lbs. Spring At Rest: 2 lbs.  
 Options: MB, B, H, W, V, P6, P7, P8, S, N      For magnetic bumpers add .312  
 For S option add .250

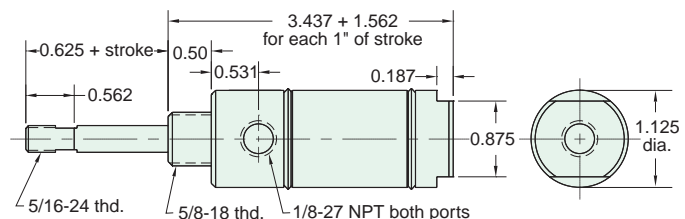

Nut included, but not shown on drawing