



1 1/2" BORE STAINLESS STEEL CYLINDER

TDR-24-□-□


Double Acting



Mount: Trunnion **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod
Options: MB, B, W, V, S, N

For magnetic bumpers add .312

For S option add .187

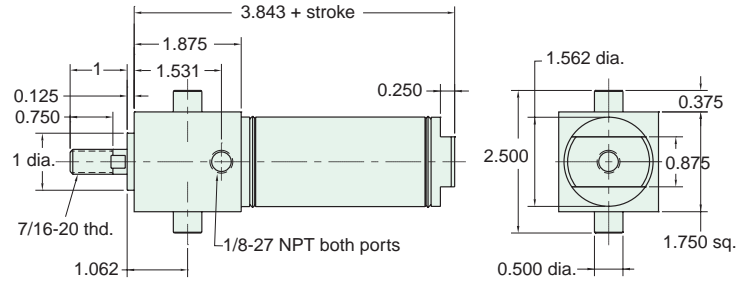


SDD-24-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 8", 10", 12"
Type: Double Rod
Options: C, F, MB, B, W, V, P6, P7, P8, N

For magnetic bumpers add .312

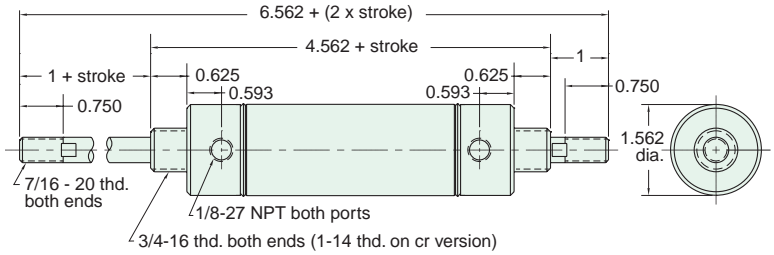

Nuts included, but not shown on drawing


CRR-24-□-□

Reverse Acting



Mount: Clevis **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: MB, B, H, W, V, P6, P7, P8, N

For magnetic bumpers add .312

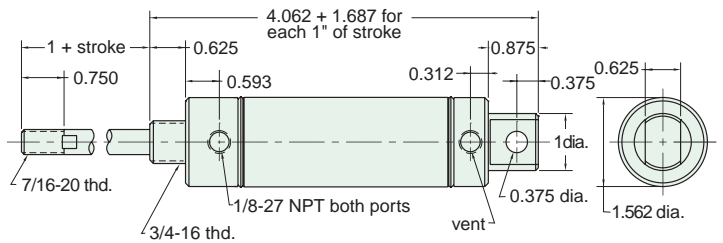

Furnished without nut(s). See Chart on Page 46.


ERR-24-□-□

Reverse Acting



Mount: End **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: MB, B, H, W, V, N

For magnetic bumpers add .312

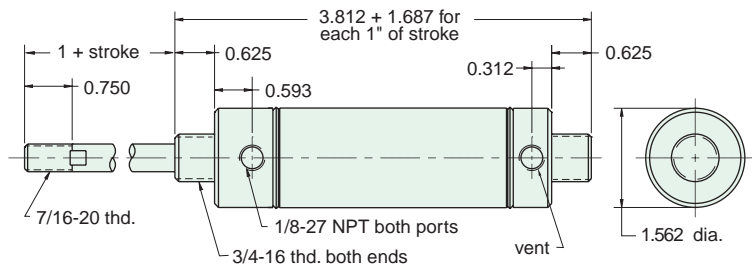

Nuts included, but not shown on drawing