




1 1/2" BORE STAINLESS STEEL CYLINDER

EBR-24-□-□

Double Acting, Rear Spring Bias

Mount: End **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: MB, B, H, W, V, P6, P7, P8, N For magnetic bumpers add .312

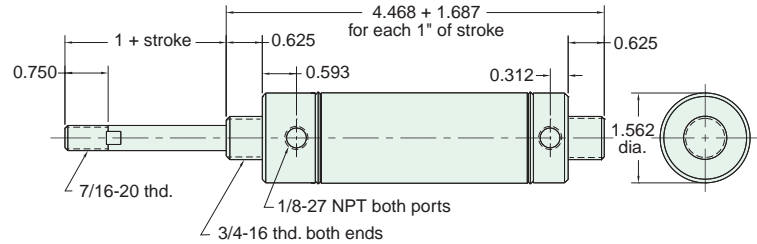


Nuts included, but not shown on drawing

EFR-24-□-□

Double Acting, Front Spring Bias

Mount: End **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: MB, B, H, W, V, P6, P7, P8, N For magnetic bumpers add .312

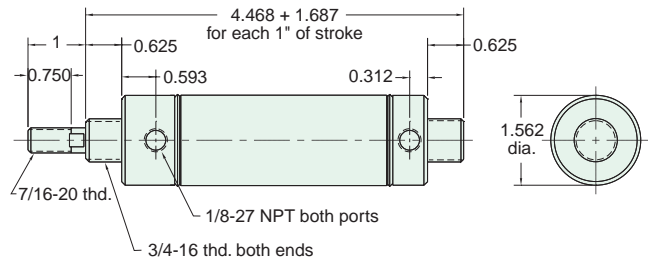


Nuts included, but not shown on drawing

SFD-24-□-□

Double Acting, Front Spring Bias

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Double Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: MB, B, H, W, V, P6, P7, P8, N For magnetic bumpers add .312

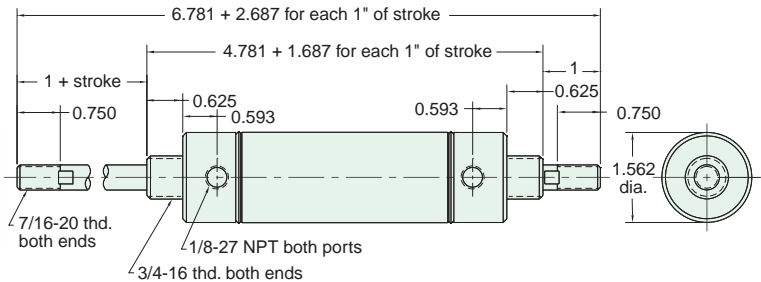


Nuts included, but not shown on drawing

SBR-24-□-□

Double Acting, Rear Spring Bias

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: MB, B, H, W, V, P6, P7, P8, S, N For magnetic bumpers add .312

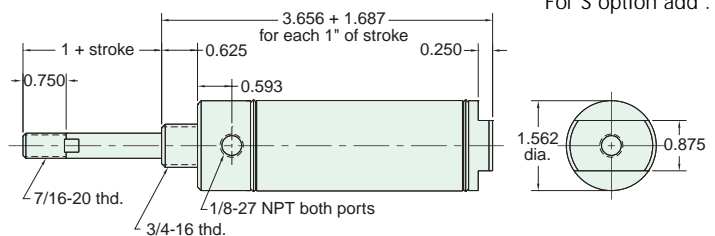

For S option add .187

Nuts included, but not shown on drawing