


1 1/2" BORE STAINLESS STEEL CYLINDER



SFR-24-□-□


Double Acting, Front Spring Bias

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: MB, B, H, W, V, P6, P7, P8, S, N For magnetic bumpers add .312

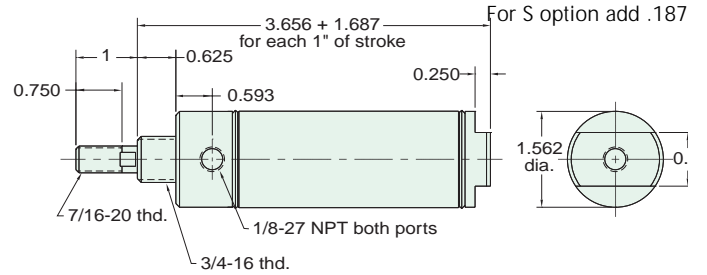

Nut included, but not shown on drawing

Pneumatic Stapler

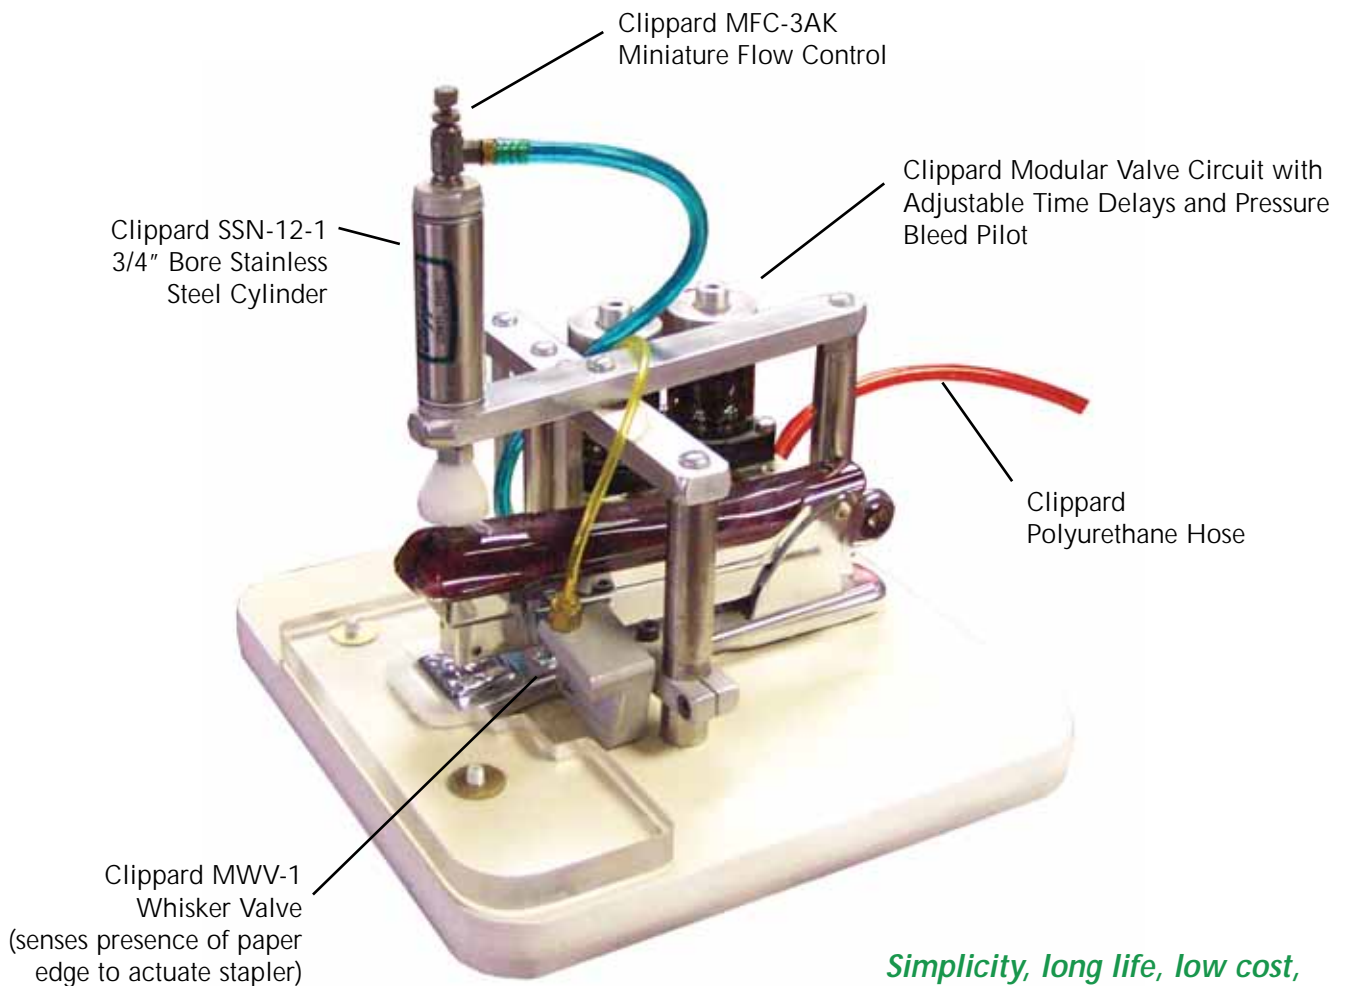

Simplicity, long life, low cost, ease of maintenance and high power are combined in this unique office stapler application.