


2" BORE STAINLESS STEEL CYLINDER



SSR-32-□-□

Single Acting

Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 7, 8", 10", 12"
Type: Rotating Rod **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.
Options: MB, B, V, S, N For magnetic bumpers add .312
 For S option add .375

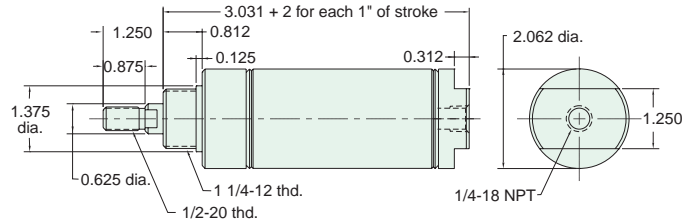


Nut included, but not shown on drawing

USR-32-□-□

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.
Options: MB, B, V, N For magnetic bumpers add .312
 For S option add .375

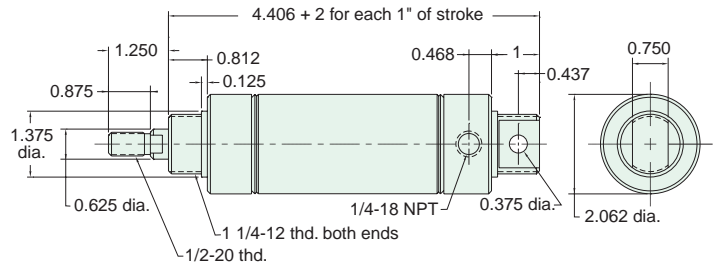


Furnished without nut(s). See Chart on Page 54.

SDR-32-□-□

Double Acting

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6"
Type: Rotating Rod
Options: C, F, R, MB, B, W, V, P6, P7, P8, S, N For magnetic bumpers add .312
 For S option add .375 For C, F, R and S options add .375

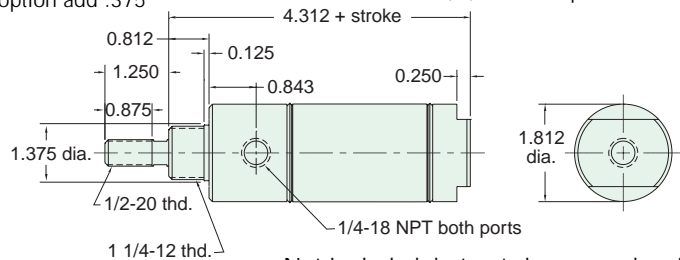


Nut included, but not shown on drawing
 For C, F, & R options use side ported rear head

UDR-32-□-□

Double Acting

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4", 5", 6", 7, 8", 10", 12"
Type: Rotating Rod
Options: C, F, R, MB, B, W, V, P2, P3, P4, P5, P6, P7, P8, N For magnetic bumpers add .312

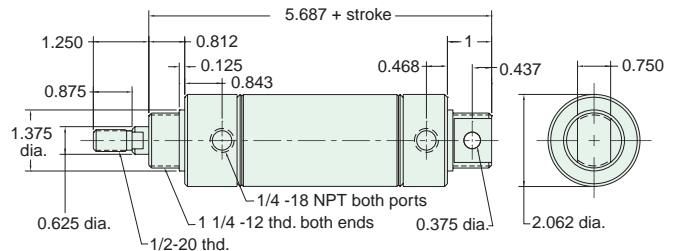

Furnished without nut(s). See Chart on Page 54.