


2" BORE STAINLESS STEEL CYLINDER



SBR-32-□-□

Spring Bias

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.
Options: MB, B, W, V, P6, P7, P8, S, N For magnetic bumpers add .312
 For S option add .375

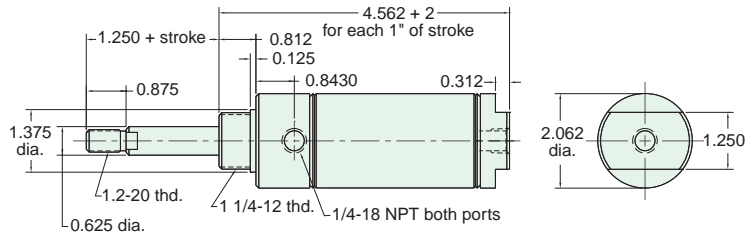


Nut included, but not shown on drawing

UFR-32-□-□

Spring Bias

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.
Options: MB, B, W, V, P2, P3, P4, P5, P6, P7, P8, N For magnetic bumpers add .312

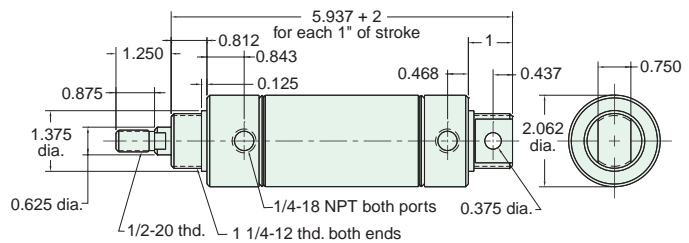


Furnished without nut(s). See Chart on Page 54.


UBR-32-□-□

Spring Bias

Mount: Universal **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 30 lbs. **Spring At Rest:** 15 lbs.
Options: MB, B, W, V, P2, P3, P4, P5, P6, P7, P8, N For magnetic bumpers add .312

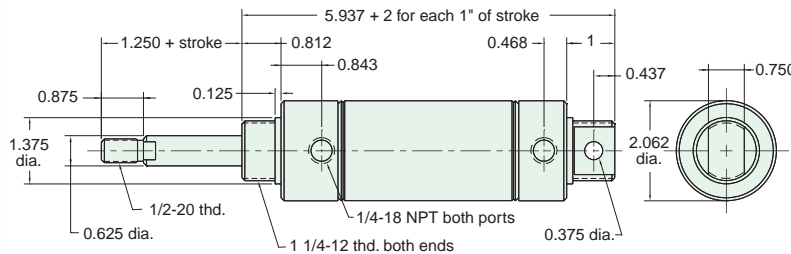

Furnished without nut(s). See Chart on Page 54.

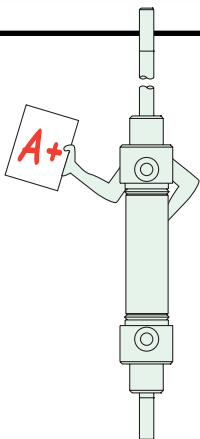

Did you know...
 All Clippard Cylinders
 are 100% tested.

