

2 1/2" BORE STAINLESS STEEL CYLINDER




SDR-40-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"
Type: Rotating Rod
Options: C, F, R, MB, W, V, P6, P7, P8, S, N

Bumpers are standard
 For magnetic bumpers add .312

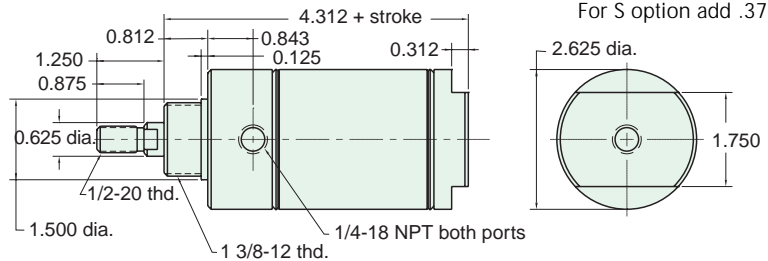

Nut included, but not shown on drawing

For C, F, & R options use side ported rear head


UDR-40-□-□

Double Acting



Mount: Universal **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 7", 8",
 10", 12"
Type: Rotating Rod
Options: C, F, R, MB, W, V, P2, P3, P4, P5, P6, P7, P8, N

Bumpers are standard For magnetic bumpers add .312

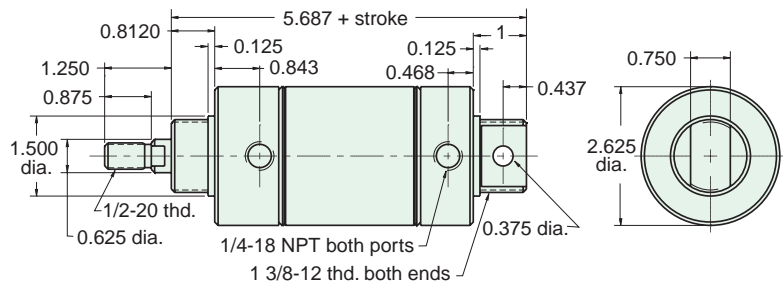

Furnished without nut(s). See Chart on Page 56.


SDD-40-□-□

Double Acting



Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 8", 10", 12"
Type: Double Rod
Options: C, F, R, MB, W, V, P6, P7, P8, N

Bumpers are standard For magnetic bumpers add .312

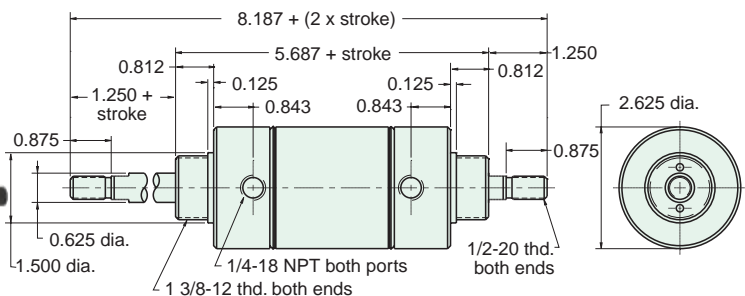

Nut included, but not shown on drawing