


## FEATURES

- Oil impregnated sintered bronze rod bushing
- Available with magnetic pistons
- 303 stainless steel ground, polished and roller burnished piston rods
- Double acting, spring return, spring extend & double rod cylinders
- 304 stainless steel tube
- Temperature range: 30° F to 180° F
- Anodized aluminum heads
- Air pressure rating to 250 psig

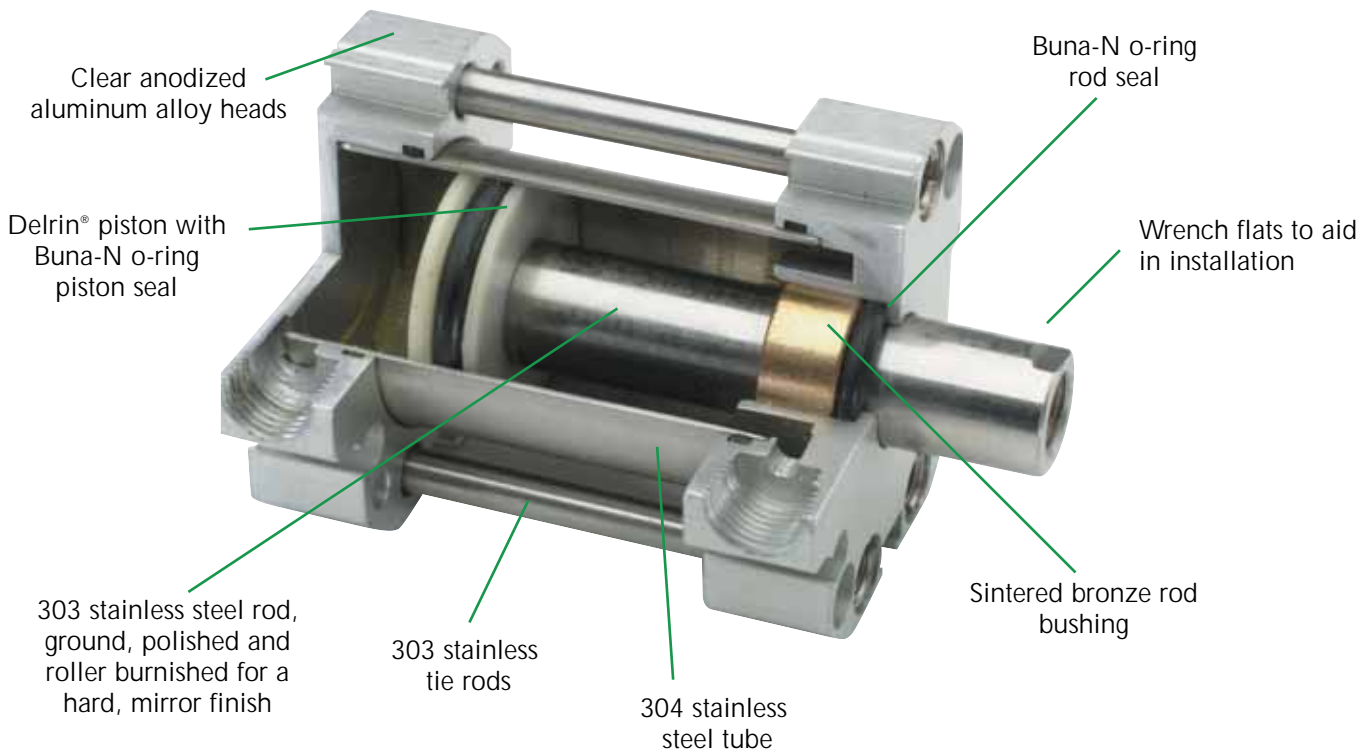

Delrin® is a registered trademark of E.I. DuPont Co.

## NUMBERING SYSTEM

<b>A</b>	<b>F</b>	-	□	□	□	-	□	-	□	-	□						
Air Force One® Compact Cylinder			<b>Mounting Type</b>			<b>Rod Type</b>	<b>Bore</b>	<b>Options</b>									
B - Bottom Mount	F - Front Mount	R - Rear Mount	U - Universal	T - Thread	D - Double Acting	S - Single Acting (Spring Return)	R - Reverse Acting (Spring Extend)	10 - 5/8"	12 - 3/4"	17 - 1 1/16"	24 - 1 1/2"	32 - 2"	40 - 2 1/2"	Blank - No Options	V - Viton Seals	M - Magnetic Piston	T - Threaded Rod
			<b>Cylinder Type</b>			<b>Stroke</b>											
						1/4" - 4"			in 1/8" increments								