

7/8" BORE BRASS HEAVY DUTY CYLINDER



Consult factory for hydraulic applications


Note: Maximum recommended hydraulic working pressure for heavy duty cylinders is 1000 psig.

7D-□

Mount: Universal **Available Stroke Lengths:** 1", 2", 3", 5", 7", 9"
Type: Double Acting

To order: Add stroke length to the end of the part number

Add **-N** to the end of the part number for a non-threaded rod

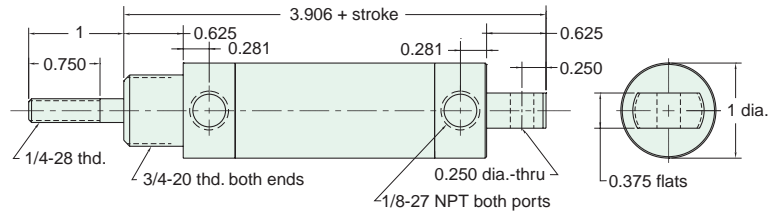


Nut included, but not shown on drawing

7DD-□

Mount: Universal **Available Stroke Lengths:** 1", 2", 3", 5", 7", 9"
Type: Double Acting
 Double Rod

To order: Add stroke length to the end of the part number

Add **-N** to the end of the part number for a non-threaded rod

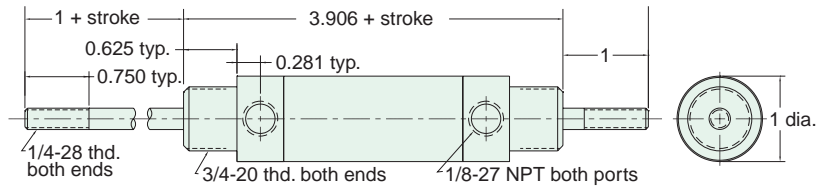

Nut included, but not shown on drawing

Did you know...

Leonard Clippard made the prototype cylinder piston seals by punching leather disks from his kids old shoe tongues.

