

AIR PILOTED VALVE ACTUATORS



MINIMUM PRESSURE REQUIRED (psig)*													
Clippard Valve	Pressure (psig)					Vacuum (in Hg)	Clippard Valve	Pressure (psig)					Vacuum (in Hg)
	w/MPA3	w/MPA-5	w/MPA-7	w/MPA-10	w/MVA-10			w/MPA3	w/MPA-5	w/MPA-7	w/MPA-10	w/MVA-10	
ES-1 Switch	12	4	2	*	*		FV-3	41	15	7.5	4.0	8.2	
MAV-2 Valve	23	8	4	2.0	4.2		FV-3P	41	15	7.5	4.0	8.2	
MAV-3 Valve	23	8	4	2.0	4.2		FV-4	41	15	7.5	4.0	8.2	
MAV-4 Valve	36	11	5.5	3.5	7.2		FV-4P	41	15	7.5	4.0	8.2	
MJV-4 Valve	36	11	5.5	3.5	7.2		FV-5	41	15	7.5	4.0	8.2	
MAV-4D Valve	13	4	1.5	1.0	2.0		FV-5P	41	15	7.5	4.0	8.2	
MJV-4D Valve	13	4	1.5	1.0	2.0		FV-3D	14	5	2.5	1.5	3.2	
MJV-2 Valve	30	10	5	3.0	6.2		FV-3DP	14	5	2.5	1.5	3.2	
MJV-3 Valve	30	10	5	3.0	6.2		FV-4D	14	5	2.5	1.5	3.2	
MAVO-2 Valve	27	9	4.5	2.5	5.2		FV-4DP	14	5	2.5	1.5	3.2	
MAVO-3 Valve	27	9	4.5	2.5	5.2		FV-5D	14	5	2.5	1.5	3.2	
MJVO-2 Valve	30	10	5	3.0	6.2		FV-5DP	14	5	2.5	1.5	3.2	
MJVO-3 Valve	30	10	5	3.0	6.2								



*with 100 psig to valve inlet

Single Acting Air Pilot Actuators

Input Pressure: 250 psig/17 bar max.



Construction: Body - brass; Springs - stainless steel; Seals - Buna N rubber; Piston - Delrin®

Mounting: 15/32-32 female thread to mount to Clippard miniature valves and components

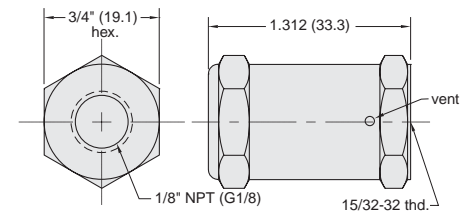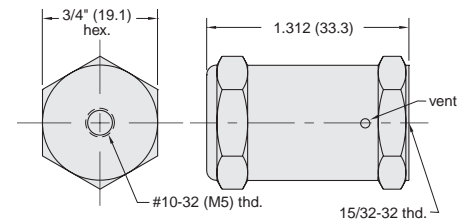

Bore Size: 0.625 (15.9)

Force Factor: 0.3

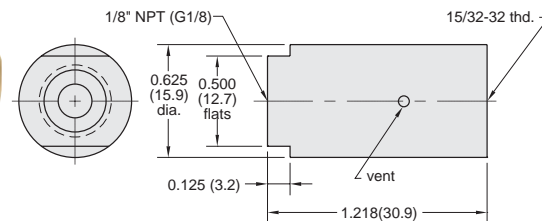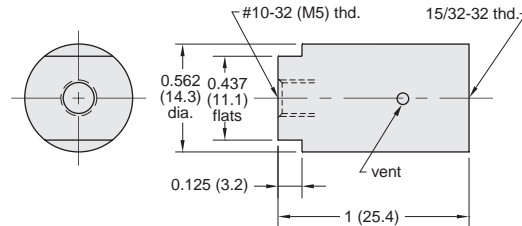


Bore Size: 0.375 (9.5)

Force Factor: 0.1

Part No. Description

- MPA-3Single Acting, Spring Return Actuator, #10-32
- MPA-3-M5 . .Single Acting, Spring Return Actuator, M5
- MPA-3P . . .Single Acting, Spring Return Actuator, 1/8" NPT
- MPA-3-MG . .Single Acting, Spring Return Actuator, G1/8

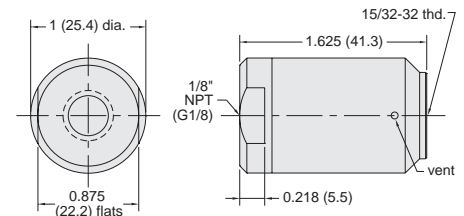

Bore Size: 0.825" (21.0) dia.

Force Factor: 0.6

Part No. Description

- MPA-7Single Acting, Spring Return Actuator, 1/8" NPT
- MPA-7-MG . .Single Acting, Spring Return Actuator, G1/8