



Non-Contact Air Proximity Switch



Non-Contact Air Proximity Switch with no moving parts: will sense any flat or curved object which presents a sensing surface of 1/4" or more to the sensing nozzle

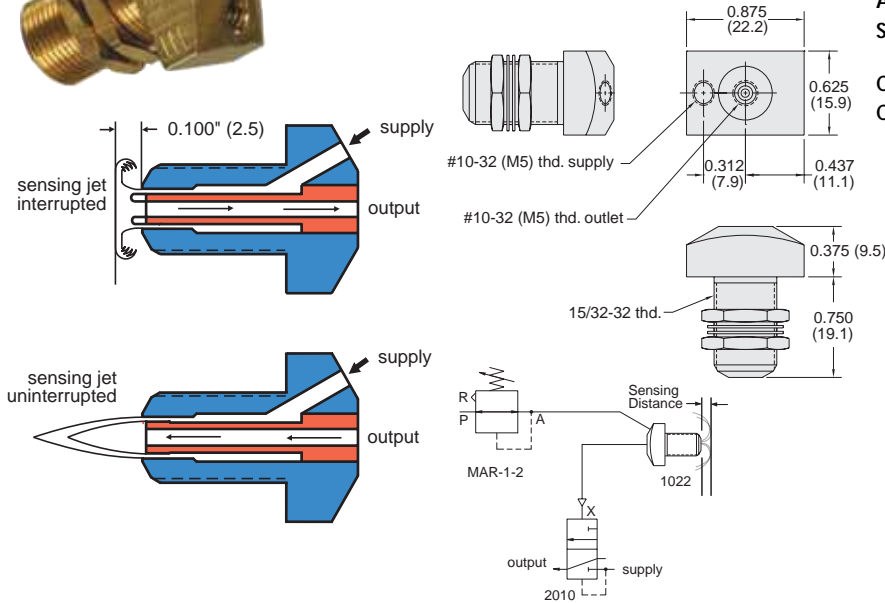

Medium: Air
 Input Pressure: 4-10 psig/0.3-0.7 bar
 Nominal Proximity Distance: 0.100"
 Output Signal at 4 psig supply: Normal: 2" H₂O
 actuated: 7 1/2" H₂O
 Frequency Response: 500 CPM
 Air Consumption: 0.3 SCFM
 Sensing Capability: Flat or curved surfaces with 1/8" minimum radius
 Connections: #10-32 (M5) female
 Construction: Solid brass bright dipped

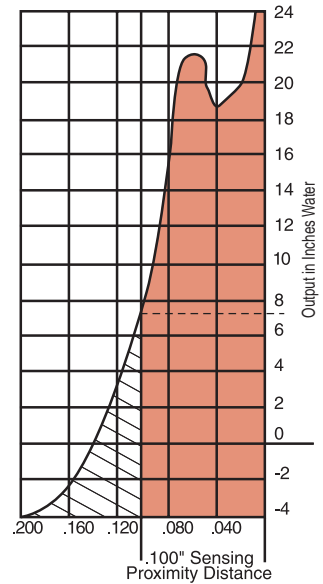


Part No.	Description
1022	Non-Contact Air Limit Switch, #10-32
1022-M5	Non-Contact Air Limit Switch, M5


Non-Contact Gap Sensor



Non-Contact Gap Sensor will sense any flat or round object with a 1/32" minimum radius. Produces a positive signal when no object is present and a negative signal when an object interrupts its sensing system

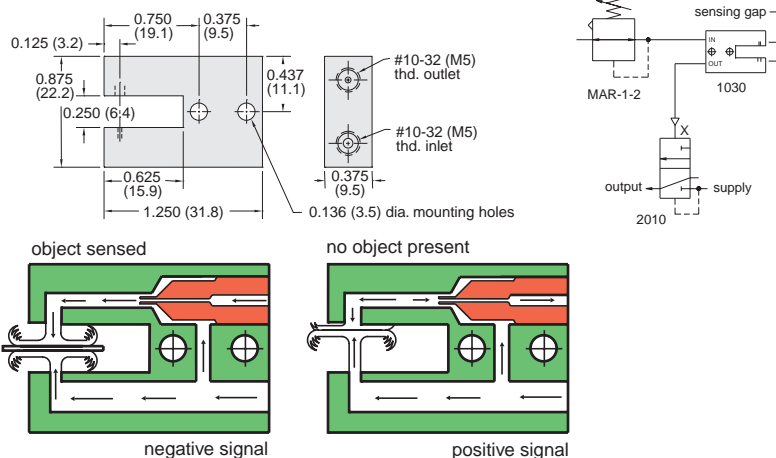

Medium: Air
 Input Pressure: 0.5-5 psig
 Output: -3" to 26" H₂O @ 4 psig
 Frequency Response: 1000 cpm
 Air Consumption: 1/4 SCFM @ 4 psig
 Sensing Capability: Flat or curved surfaces with 1/32" minimum radius. May be used for up to 4" gap with an additional auxiliary jet
 Connections: #10-32 (M5) female
 Construction: Solid brass bright dipped

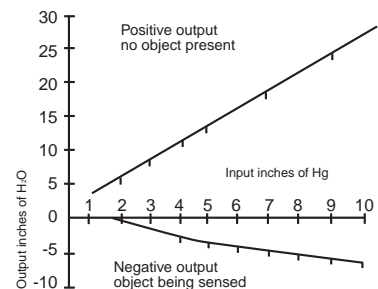

Part No.	Description
1030	Non-Contact Positive Pressure Sensor, #10-32
1030-M5	Non-Contact Positive Pressure Sensor, M5