




NEW! 10 MM & 15 MM MINIATURE VALVES


All of the benefits of Clippard quality and reliability are now available in these 10 mm and 15 mm valves. Offered in both Normally Open or Normally Closed models, these 2-way and 3-way valves are perfect for small and compact areas where pneumatic controls are needed.

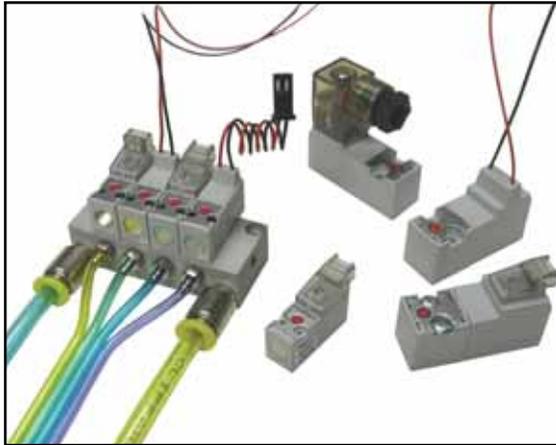

This series has a high strength, light-weight engineered glass filled nylon body, along with stainless steel, copper and Buna-N, making it suitable for a broad range of applications. With exceptional life and reliability this is the perfect sub-miniature valve for tomorrow's needs in a wide variety of industries.

All 10 mm and 15 mm valves are RoHS compliant.

Typical Air Flow

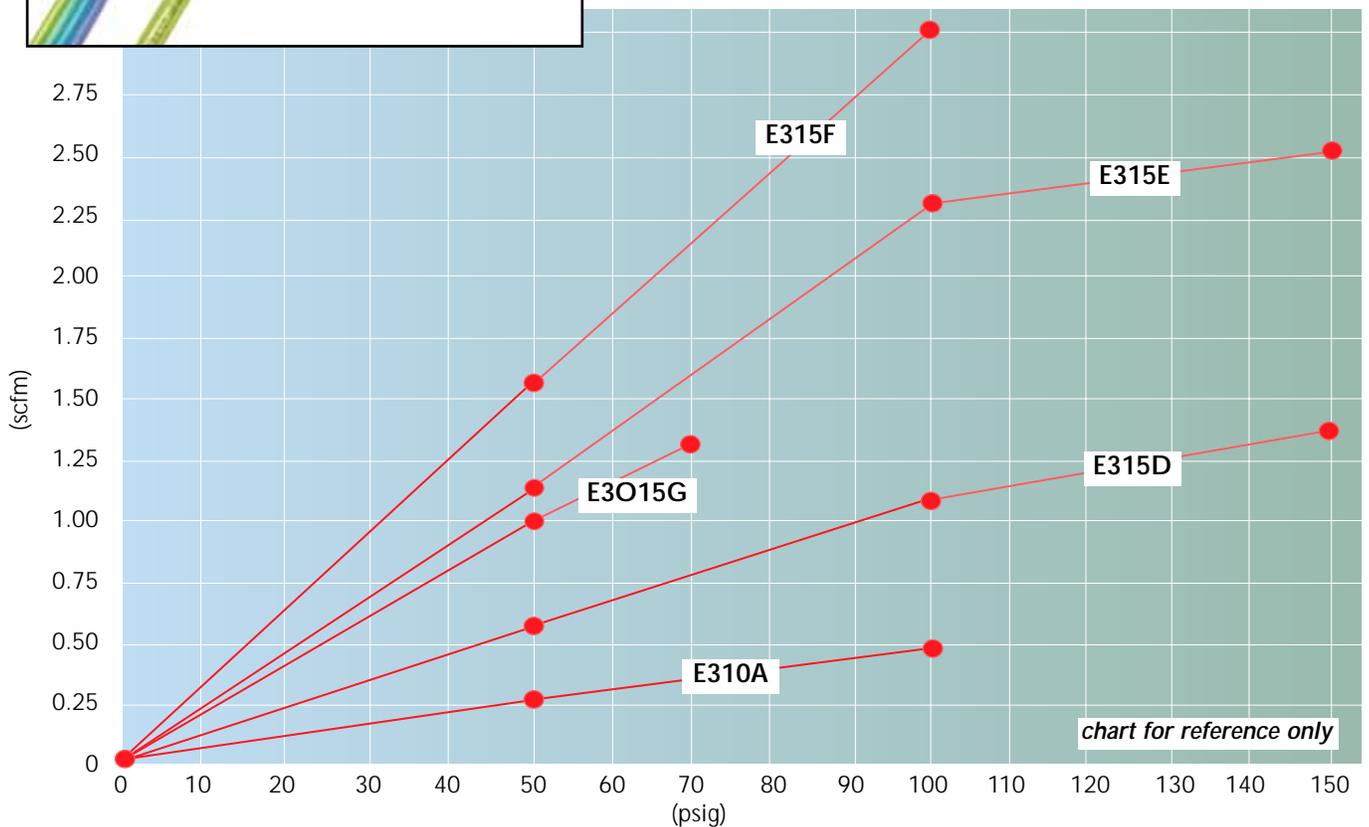

Valve Material: Glass filled Nylon, Stainless Steel, Buna-N or Fluorocarbon Elastomer

Electrical: The coil is constructed of copper wire and is isolated according to the class "F" standard. All circuitry and connections are protected from corrosion.

Weight: Weighing in at a mere 0.4 ounces is the 10 mm valve, and in the other corner the 15 mm checks in at 1.3 ounces!