





PART NUMBERING SYSTEM

Valve Type 2-Way Normally Closed 3-Way Normally Closed 3-Way Normally Open	Choose E210 E310 E3O10	<input type="text"/>
Orifice Size 0.020" (0.5 mm) 0.030" (0.75 mm)	Choose A C	<input type="text"/>
Power 0.6 Watts 1.3 Watts	Choose 1 2	<input type="text"/>
Electrical Connector In-Line Connector In-Line Connector with LED 90° Connector 90° Connector with LED Wire Leads, 11.8" (300 mm)	Choose F C E L W	<input type="text"/>
Voltage 12-Volt DC 24-Volt DC	Choose 012 024	<input type="text"/>
Seal Option Buna-N Fluorocarbon	Choose (blank) V	<input type="text"/>

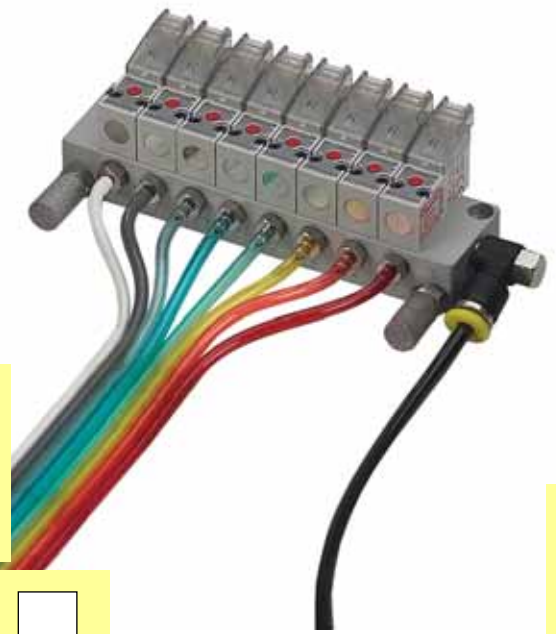

This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.



Example: **E310A - 2L012 - V**



Another feature of the Clippard 10 mm valve is the ability to detach the coil and connector from the valve body. This can be useful for the purpose of orientating the coil by 180°, or exchanging connector types or voltages.

Normally Closed	Silver
Normally Open	Black

Clippard also helps you identify the valve you have by color coding the top plate. If it is silver, the valve is a Normally Closed version—if it is black, the valve is Normally Open.

