


NEW! 10 MM MINIATURE VALVES

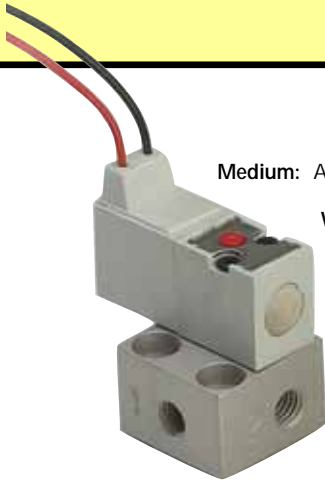

SPECIFICATIONS

Medium: Air, Gas and other Compatible Fluids

Electrical: 12 VDC or 24 VDC

Working Pressure: Vacuum to 110 psig/7.6 bar max.
See Chart below

Power Consumption: 0.6 or 1.3 watts dependent on orifice size and pressure

Max. Flow Rate: Standard: 0.5 scfm (14 l/min);
High Flow: 0.8 scfm (24 l/min)

Material: Stainless steel core and springs,
springs, nylon body and Buna-N seals

Exhaust Flow: 0.8 scfm (22 l/min)

Temperature Range: 23 to 122°F
(-5 to 50°C)

Response Time: 8 ms when energized; 10 ms
when de-energized

tested to over
100 million
cycles!

ORDER INFORMATION

Type	Base No.	Connector	Orifice	Wattage	Working Pressure
2/2 Normally Closed 	E210A-1E*	90° Connector	0.020"	0.6	Vac - 110 psig/7.6 bar
	E210C-2E*	90° Connector	0.030"	1.3	Vac - 110 psig/7.6 bar
	E210A-1L*	90° Connector with LED	0.020"	0.6	Vac - 110 psig/7.6 bar
	E210C-2L*	90° Connector with LED	0.030"	1.3	Vac - 110 psig/7.6 bar
	E210A-1F*	In-Line Connector	0.020"	0.6	Vac - 110 psig/7.6 bar
	E210C-2F*	In-Line Connector	0.030"	1.3	Vac - 110 psig/7.6 bar
	E210A-1C*	In-Line Connector with LED	0.020"	0.6	Vac - 110 psig/7.6 bar
	E210C-2C*	In-Line Connector with LED	0.030"	1.3	Vac - 110 psig/7.6 bar
3/2 Normally Closed 	E310A-1E*	90° Connector	0.020"	0.6	Vac - 110 psig/7.6 bar
	E310C-2E*	90° Connector	0.030"	1.3	Vac - 110 psig/7.6 bar
	E310A-1L*	90° Connector with LED	0.020"	0.6	Vac - 110 psig/7.6 bar
	E310C-2L*	90° Connector with LED	0.030"	1.3	Vac - 110 psig/7.6 bar
	E310A-1F*	In-Line Connector	0.020"	0.6	Vac - 110 psig/7.6 bar
	E310C-2F*	In-Line Connector	0.030"	1.3	Vac - 110 psig/7.6 bar
	E310A-1C*	In-Line Connector with LED	0.020"	0.6	Vac - 110 psig/7.6 bar
	E310C-2C*	In-Line Connector with LED	0.030"	1.3	Vac - 110 psig/7.6 bar
3/2 Normally Open 	E3010A-1E*	90° Connector	0.020"	0.6	Vac - 110 psig/7.6 bar
	E3010C-2E*	90° Connector	0.030"	1.3	Vac - 110 psig/7.6 bar
	E3010A-1L*	90° Connector with LED	0.020"	0.6	Vac - 110 psig/7.6 bar
	E3010C-2L*	90° Connector with LED	0.030"	1.3	Vac - 110 psig/7.6 bar
	E3010A-1F*	In-Line Connector	0.020"	0.6	Vac - 110 psig/7.6 bar
	E3010C-2F*	In-Line Connector	0.030"	1.3	Vac - 110 psig/7.6 bar
	E3010A-1C*	In-Line Connector with LED	0.020"	0.6	Vac - 110 psig/7.6 bar
	E3010C-2C*	In-Line Connector with LED	0.030"	1.3	Vac - 110 psig/7.6 bar
	E3010A-1W*	Wire Leads, 11.8" (300 mm)	0.020"	0.6	Vac - 110 psig/7.6 bar
	E3010C-2W*	Wire Leads, 11.8" (300 mm)	0.030"	1.3	Vac - 110 psig/7.6 bar

*Add Voltage Choice to the end of each Base Part Number. Example: **E210A-1C012**