





# NEW! 15 MM MINIATURE VALVES

## PART NUMBERING SYSTEM

<b>Valve Type</b> 2-Way N.C. 3-Way N.C. 3-Way N.O.	<b>Choose</b> E215 E315 E3O15	<input type="text"/>
<b>Orifice Size</b> 0.8 mm (0.032"), 1.1 N.C. 1.1 mm (0.043"), 1.1 1.6 mm (0.063"), 1.6 1.6 mm (0.063"), 1.1 N.O.	<b>Choose</b> D E F G	<input type="text"/>
<b>Power</b> 1.0 Watts 2.3 Watts	<b>Choose</b> 1 2	<input type="text"/>
<b>Electrical Connector</b> Terminal Connector DIN Connector 90° Connector with LED In-Line Connector with LED Wire Leads, 11.8" (300 mm)	<b>Choose</b> T D L C W	<input type="text"/>
<b>Voltage</b> 12-Volt DC 24-Volt DC 24-Volt AC 110-Volt AC 220-Volt AC	<b>Choose</b> 012 024 24A 110 220	<input type="text"/>

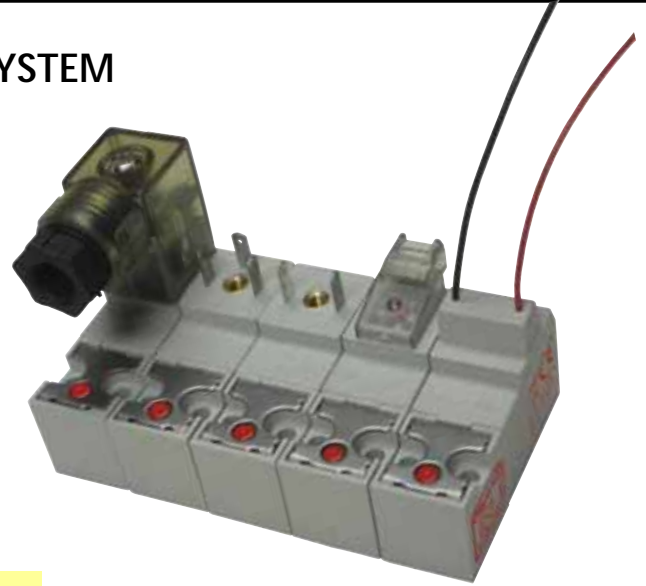

This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.



Example: **E315F - 1C24A**

## ELECTRICAL SPECIFICATIONS

Power (Wattage)	Voltage	Voltage Tolerance	Response Time (Energized)	Response Time (De-Energized)	Copper Wire Insulation Class
1.0	12 VDC 24 VDC 24 VAC 110 VAC 220 VAC	-10% to 10%	10 ms	12 ms	F 311°F (155°C)
2.3	12 VDC 24 VDC 24 VAC 110 VAC 220 VAC	-10 to 10%	10 ms	12 ms	F 311°F (155°C)