


PUSH-QUICK FITTINGS

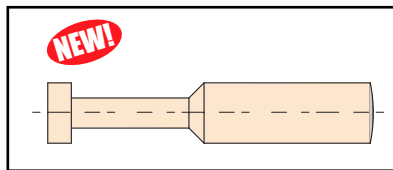

Push-Quick Plugs

Clippard offers a variety of Push-Quick Plugs in sizes to fit 1/8" through 3/8" OD tubing. These plastic plugs may be


used to plug the port of a Push-Quick Fitting for later use. Used as a temporary plug, they may later be removed and tubing inserted to connect to an additional line of a circuit.

Part No.	Description	Part No.	Description
PQ-PG04	1/8" OD Tube	PQ-PG08	1/4" OD Tube
PQ-PG05	5/32" OD Tube	PQ-PG10	5/16" OD Tube
PQ-PG06M	6 mm OD Tube	PQ-PG12	3/8" OD Tube

Push-Quick Fitting Adapters

Clippard offers a variety of accessories that are designed for use with Push-Quick Fittings. These include special #10-32 threaded adapters in both male (p/n 11674) and female (p/n 11675) thread configurations and adapters that can be used to plug a Push-Quick fitting.

The threaded adapters insert into Push-Quick Fittings and provide either a male or female thread that can be used to mount any Clippard product with a #10-32 threaded inlet. This allows the direct attachment of the product to a Push-Quick Fitting without hoses or additional fittings.

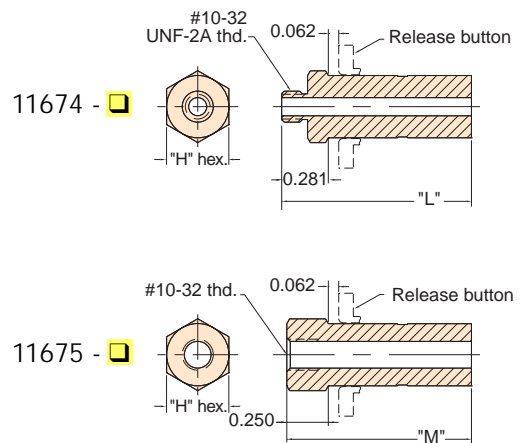

Part Dash #	Tubing Size	"D"	"H"	"L"	"M"	"N"
- 05	5/32"	0.312"	1/4"	0.993"	0.962"	1.212"
- 08	1/4"	0.312"	1/4"	1.003"	0.972"	1.222"
- 12	3/8"	0.437"	3/8"	1.143"	1.112"	1.362"

Figure 1 shows an MAV-3 3-Way Valve connected to a PQ-RT05P Run Tee using a 11674-05 Adapter. In this example, the Run Tee is connected to a 1/8" NPT supply pipe.

Figure 2 shows an IND-1M-WH Pressure Indicator connected to a PQ-TU08 Tee Union using a 11675-08 Adapter. If one of the branches of a Push-Quick Fitting is to be used as a temporary pressure gauge port, the PQ-PGXX series of Plugs can be used when the gauge is not in place. Plugs may also be used if Push-Quick Fitting branches are intended for future additions to the circuit, but have no current need.

Figure 3 shows a PQ-CU Cross Union with one branch plugged with a PQ-PG08 Plug.

