


MINIMATIC® J-SERIES QUICK CONNECT



The Minimatic J-Series quick connect consists of two component parts that are joined to form the complete connector. The valve body contains a 2-way spring-loaded poppet valve that is generally connected to the main air supply. When the poppet is not depressed, the air supply is shut-off by this valve. The Cap contains a valve depressor that when assembled to the valve body, depresses the poppet allowing air to flow from the main supply to circuitry or equipment downstream. Valve body & cap assemblies contain both components.

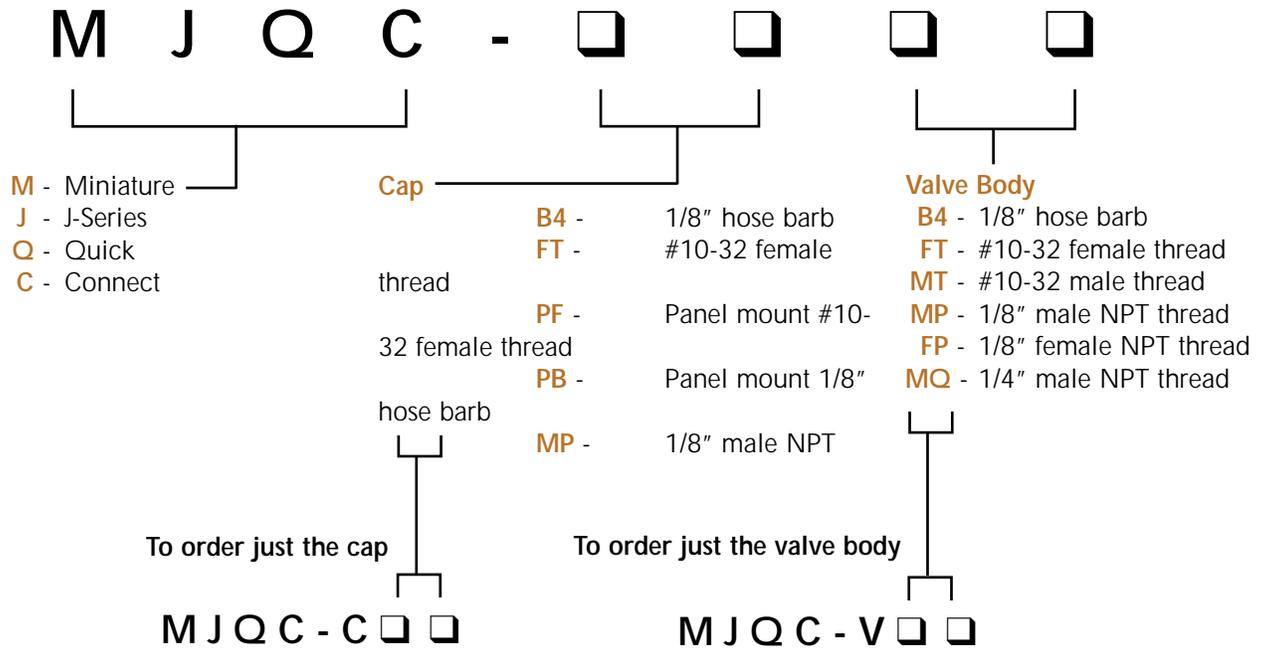

STANDARD CATALOG PARTS		
Assembly	Cap Only	Valve Body Only
MJQC-B4B4	MJQC-CB4	MJQC-VB4
MJQC-B4MP	MJQC-CFT	MJQC-VFT
MJQC-MPB4	MJQC-CMP	MJQC-VFP
MJQC-PBB4	MJQC-CPB	MJQC-VMP
MJQC-PFB4	MJQC-CMQ	MJQC-VMQ