




# MINIMATIC® QUICK CONNECT

## MQC-FS



1/8" Hose Connector

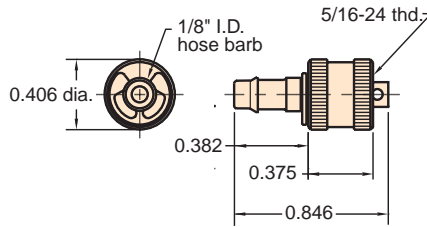

**Material:** Brass

**Thread:** I.D. of knurled end screws onto male end of valve bodies

**For Use With:** 1/8" I.D. Vinyl, Buna-N or braided hose

**Installation:** Simply push hose onto barbed end and secure with hose clamp # 5000-1, 5000-2 or 5000-1A.

**Seals:** Buna-N


**Options:** (-NP)

**Triple Barb:** Order #MQC-F

## MQC-F2S



1/16" Hose Connector

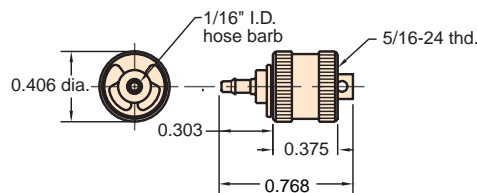

**Material:** Brass

**Thread:** I.D. of knurled end screws onto male end of valve bodies

**For Use With:** Subminiature 3814-5 1/16" ID vinyl hose

**Installation:** Simply push hose onto barbed end and secure with slip-over hose clamp furnished

**Seals:** Buna-N

**Options:** (-NP)


**Triple Barb:** Order #MQC-F2



## MQC-FT



#10-32 (M5) Tapped Connector



**Material:** Brass

**Thread:** Outlet is tapped #10-32 or M5 Metric. I.D. of knurled end screws onto male end of valve bodies: MQC-V2, MQC-V3, MQC-VP

**Mounting:** Outlet mounts with #10-32 (M5) short coupling #11999

**Seals:** Buna-N

**Options:** (-NP), (-M5)



### Tip

When assembling #10-32 threaded fittings with gaskets, turn the fitting in until the gasket contacts the surface. Then give the fitting less than a 1/4 turn to achieve a good seal.