



# 5/16" BORE STAINLESS STEEL CYLINDER

## SSR-05-□-□


Single Acting

**Mount:** Stud  
**Type:** Rotating Rod  
**Options:** B, V, S, N

**Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Spring Compressed:** 1 lbs. **Spring At Rest:** 0.5 lbs.  
**Maximum Stroke:** 29"

For B option add 0.250

For S option add 0.220

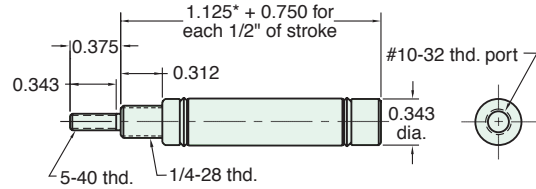

Nut included, but not shown on drawing


## USR-05-□-□

Single Acting

**Mount:** Universal  
**Type:** Rotating Rod  
**Options:** B, V, N, P6

**Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Spring Compressed:** 1 lbs. **Spring At Rest:** 0.5 lbs.  
**Maximum Stroke:** 29"

For B option add 0.250

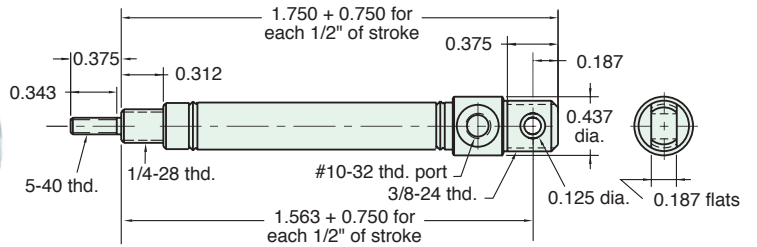

Nuts included, but not shown on drawing

## SDR-05-□-□


Double Acting

**Mount:** Stud  
**Type:** Rotating Rod  
**Options:** B, V, P6, P7, P8, S, N

**Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Maximum Stroke:** 43"

For B option add 0.250

For S option add 0.220

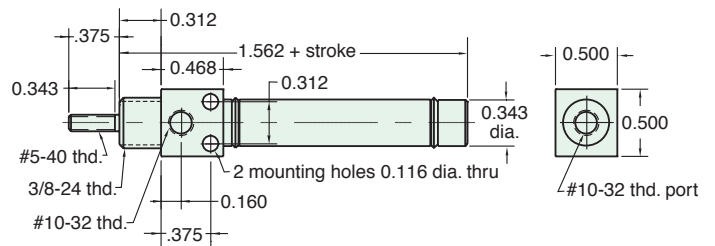

Nut included, but not shown on drawing


## UDR-05-□-□

Double Acting

**Mount:** Universal  
**Type:** Rotating Rod  
**Options:** B, V, P2, P3, P4, P5, P6, P7, P8, N

**Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Maximum Stroke:** 43"

For B option add 0.250

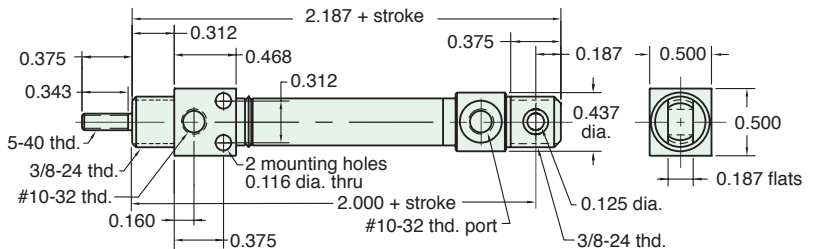

Nuts included, but not shown on drawing