


# 3/4" BORE STAINLESS STEEL CYLINDER



## FSR-12-□-□

Single Acting


**Mount:** Front      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, V, S, N, W      **Maximum Stroke:** 25"      For B option add 0.500  
 For M option add 0.125  
 For S option add 0.437

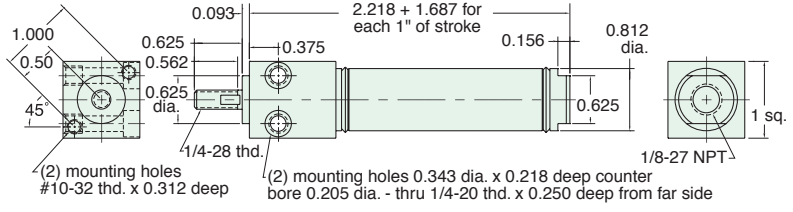

## SSN-12-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, V, S, N      **Maximum Stroke:** 26"      For B option add 0.500  
 For M option add 0.125  
 For S option add 0.437

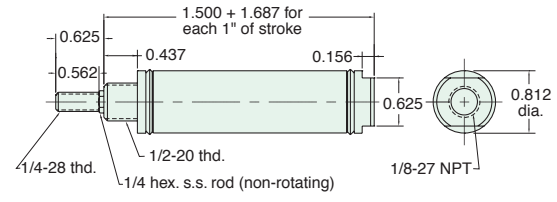


Nut included, but not shown on drawing

## SSR-12-□-□

Single Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, V, S, N, W      **Maximum Stroke:** 26"      For B option add 0.500  
 For M option add 0.125  
 For S option add 0.437

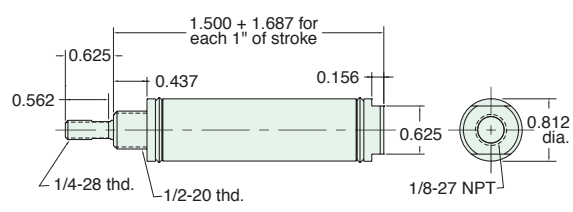

Nut included, but not shown on drawing

## TSR-12-□-□

Single Acting

**Mount:** Trunnion      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 6 lbs. **Spring At Rest:** 3 lbs.  
**Options:** M, B, H, V, S, N      **Maximum Stroke:** 25"      For B option add 0.500  
 For M option add 0.125  
 For S option add 0.437

