SDR-14-❑-❑

Double Acting

Mount: Stud
Type: Rotating Rod
Options: C, F, R, M, W, V, P6, P7, P8, S, N

Standard Stroke Lengths: 1/2″, 1″, 1-1/2″, 2″, 3″, 4″, 5″, 6″
Maximum Stroke: 42″

Bumpers are standard
For M option add 0.125
For C, F, R and S option add 0.281
For CM, FM, RM and SM option add 0.593

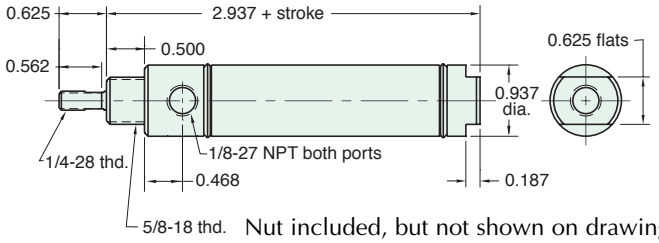

Nut included, but not shown on drawing
For C, F, & R options use side ported rear head

UDR-14-❑-❑

Double Acting

Mount: Universal
Type: Rotating Rod
Options: C, F, R, M, W, V, P2, P3, P4, P5, P6, P7, P8, N

Standard Stroke Lengths: 1/2″, 1″, 1-1/2″, 2″, 3″, 4″, 5″, 6″
Maximum Stroke: 41″

Furnished without nut(s) See chart on page 28
Bumpers are standard
For M option add 0.125
For CM, FM and RM option add 0.312

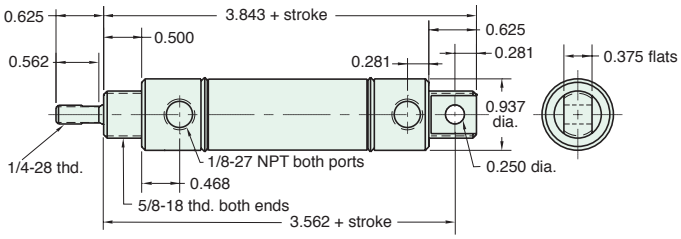

Furnished without nut(s). See Chart on Page 28.

SDD-14-❑-❑

Double Acting

Mount: Stud
Type: Double Rod
Options: C, F, M, W, V, P6, P7, P8, N

Standard Stroke Lengths: 1″, 2″, 3″, 4″, 5″, 6″
Maximum Stroke: 20″

Bumpers are standard
For M option add 0.125
For CM, FM and RM option add 0.312

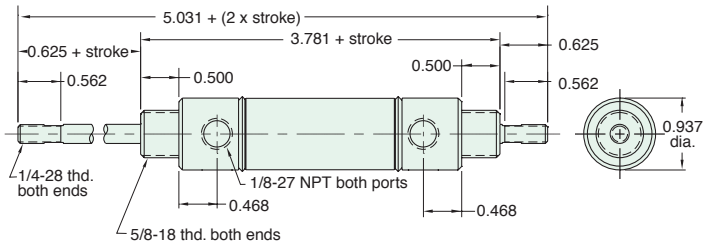

Nuts included, but not shown on drawing

SDH-14-❑-❑

Double Acting

Mount: Stud
Type: Hollow Rod
Options: C, F, M, W, V, P6, P7, P8, N

Standard Stroke Lengths: 1″, 2″, 3″, 4″, 5″, 6″
Maximum Stroke: 20″

Bumpers are standard
For M option add 0.125
For CM, FM and RM option add 0.312

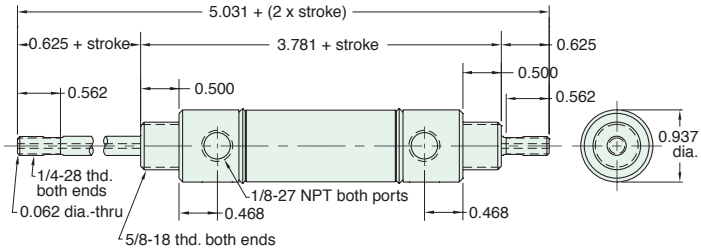

Nuts included, but not shown on drawing