


1 1/2" BORE STAINLESS STEEL CYLINDER



SFR-24-□-□


Double Acting, Front Spring Bias

Mount: Stud **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.
Options: M, B, H, W, V, P6, **Maximum Stroke:** 23" For S option add 0.187
 P7, P8, S, N

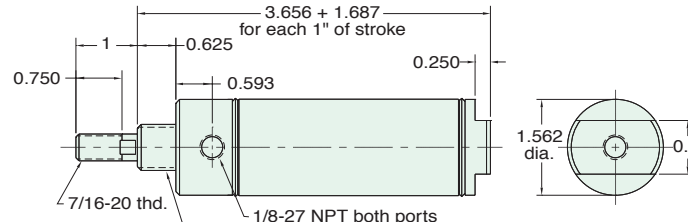

Nut included, but not shown on drawing

Pneumatic Stapler

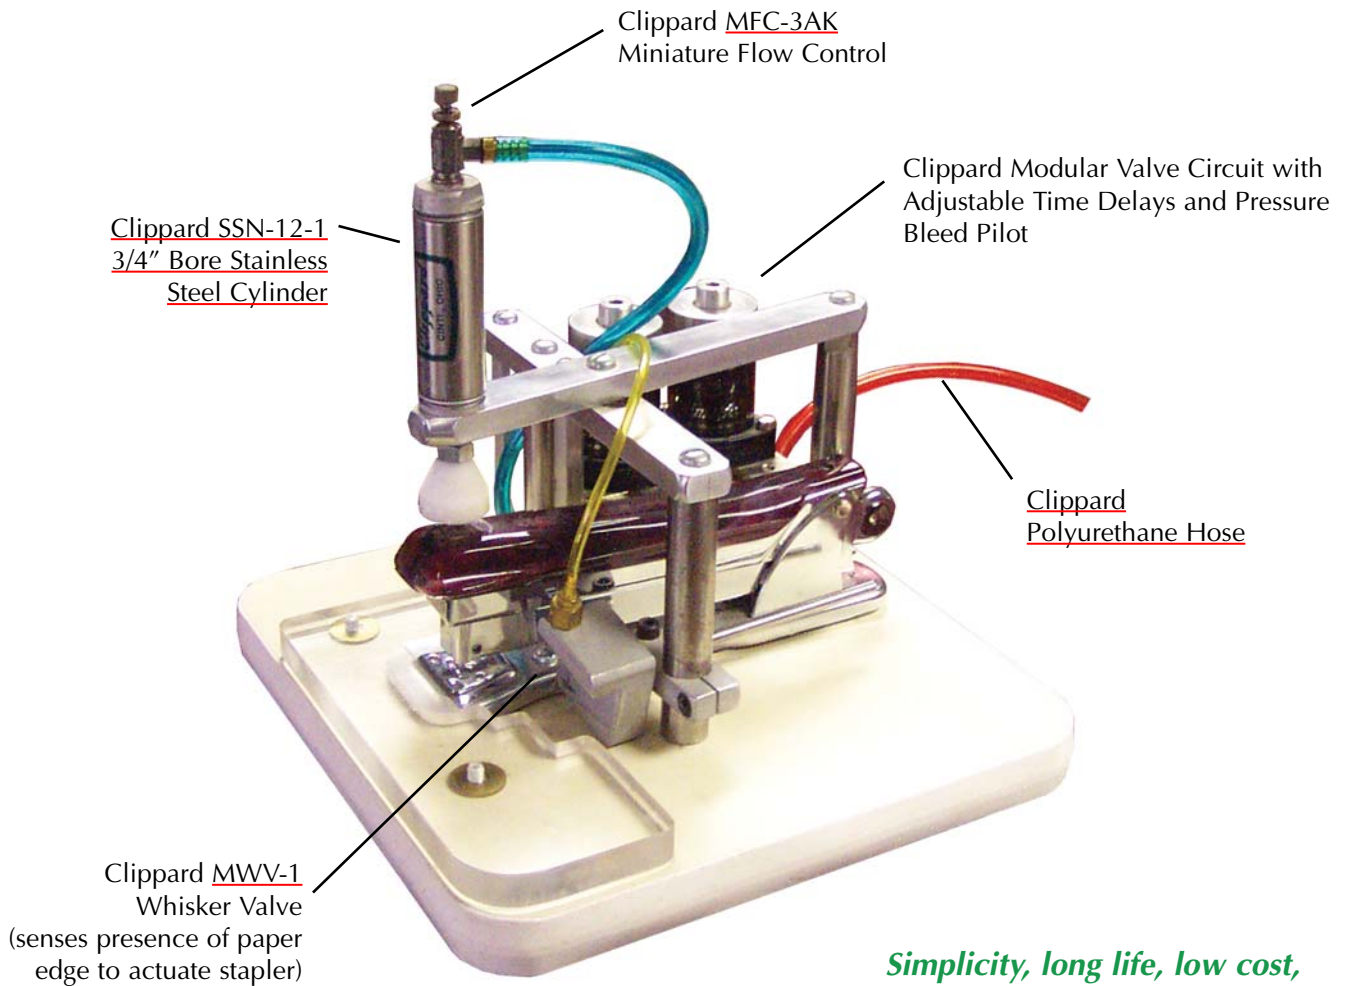

Simplicity, long life, low cost, ease of maintenance and high power are combined in this unique office stapler application.