

# 1 3/4" BORE STAINLESS STEEL CYLINDER




## SSN-28-□-□

Single Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 24 lbs.      **Spring At Rest:** 11 lbs.  
**Options:** M, V, S, N      **Maximum Stroke:** 20"      **Bumpers are standard**  
 For M option add 0.125  
 For S option add 0.562

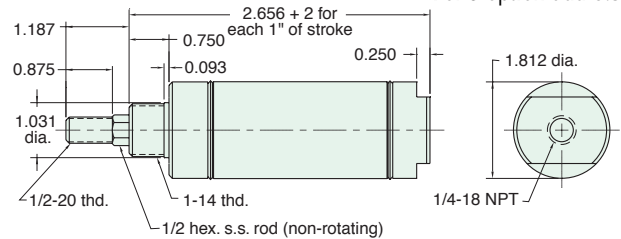


Nut included, but not shown on drawing

## SSR-28-□-□

Single Acting



**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 24 lbs.      **Spring At Rest:** 11 lbs.  
**Options:** M, V, S, N, W      **Maximum Stroke:** 20"      **Bumpers are standard**  
 For M option add 0.125  
 For S option add 0.562

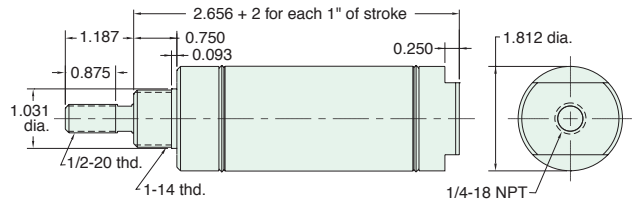


Nut included, but not shown on drawing

## USN-28-□-□

Single Acting



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Non-Rotating Rod      **Spring Compressed:** 24 lbs.      **Spring At Rest:** 11 lbs.  
**Options:** M, V, P6, N      **Bumpers are standard.** For M option add 0.125

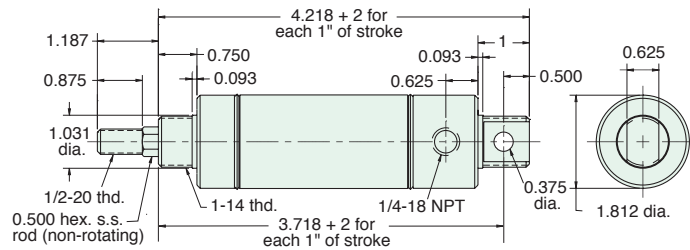


Furnished without nut(s). See Chart on Page 50.

## USR-28-□-□

Single Acting



**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 24 lbs.      **Spring At Rest:** 11 lbs.  
**Options:** M, V, P6, N, W      **Bumpers are standard.** For M option add 0.125

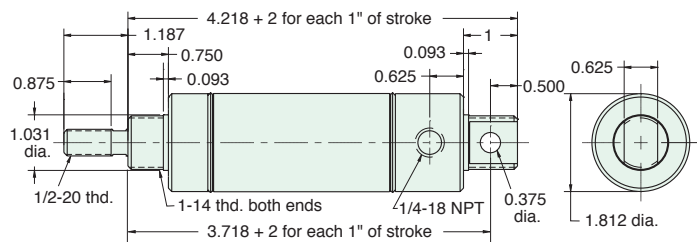

Furnished without nut(s). See Chart on Page 50.