



## 2 Pos. N.C. Poppet w/Momentary Actuation

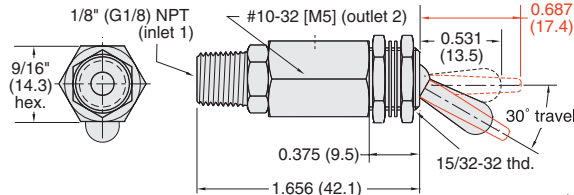


**Input Pressure:** 150 psig max.

**Air Flow:** 4.0 scfm @ 50 psig; 6.8 scfm @ 100 psig

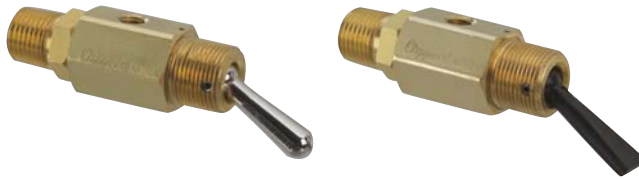

Part No.	Description
<u>TV-2MP</u>	2 Position Poppet Valve, NP Steel Toggle, 1/8" NPT
<u>TV-2MFP</u>	2 Position Poppet Valve, Plastic Toggle, 1/8" NPT

## 2 Pos. N.O. Spool w/Momentary Actuation

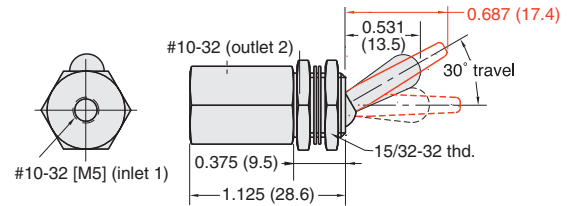


**Input Pressure:** 150 psig/10 bar max

**Air Flow:** 4.5 scfm @ 50 psig; 8.0 scfm @ 100 psig;  
190 l/min @ 6 bar




Part No.	Description
<u>TVO-2M</u>	2 Position N.O. Spool Valve, NP Steel Toggle, #10-32
<u>TVO-2M-M5</u>	2 Position N.O. Spool Valve, NP Steel Toggle, M5
<u>TVO-2MF</u>	2 Position N.O. Spool Valve, Plastic Toggle, #10-32
<u>TVO-2MF-M5</u>	2 Position N.O. Spool Valve, Plastic Toggle, M5

## 2 Pos. N.O. Spool with Momentary Actuation

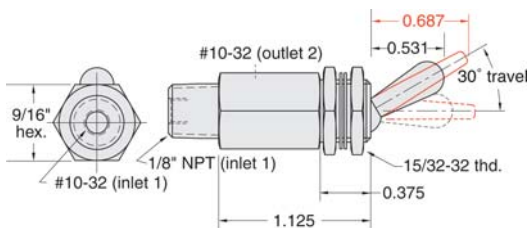

**Input Pressure:** 150 psig max.

**Air Flow:** 4.0 scfm @ 50 psig; 6.8 scfm @ 100 psig



Part No.	Description
<u>TVO-2MP</u>	2 Position Spool Spool Valve, NP Steel Toggle
<u>TVO-2MFP</u>	2 Position Spool Spool Valve, Plastic Toggle

**Did you know...**

that Clippard was the first to use the #10-32 threaded port for Miniature valves, cylinders, and fittings which continues to be the industry standard today.