



EV, ET, EC SERIES 2- & 3-WAY NORMALLY-CLOSED VALVES IN-LINE MOUNT




□ - EC - □ - □ - □

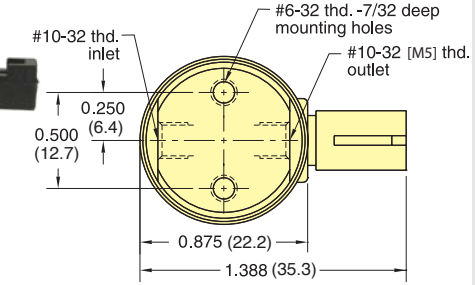

□ - ET - □ - □ - □

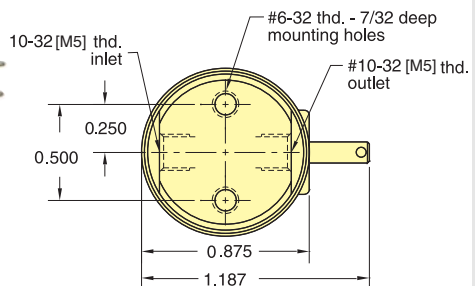

□ - EV - □ - □ - □

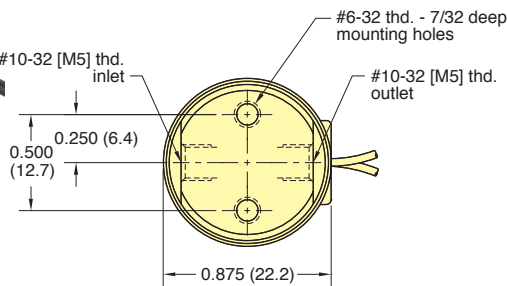

Type: Normally-Closed 2- or 3-Way
Medium: Air (40 micron filtration)
Temperature Range: 30 to 180°F
Power Consumption: 0.67 watt
Response: 5 to 10 milliseconds
Mounting: In-line
Ports: #10-32 [M5]
Operating Range: 90% to 150% of rated voltage
Air Flow: 0.6 scfm @ 100 psig;
 17 l/min @ 7 bar
 "L" option - 0.5 scfm @ 50 psig;
 14 l/min @ 3.5 bar
 "H" option - 0.45 scfm @ 25 psig;
 13 l/min @ 1.8 bar
Pressure Range:
 28" Hg Vac. to 105 psig;
 0 to 7 bar max
 "L" option:
 28" Hg Vac. to 50 psig;
 0 to 3.5 bar max
 "H" option:
 28" Hg Vac. to 25 psig;
 0 to 1.8 bar max



For Cable and Connectors, see Page 201.

NUMBERING SYSTEM

□	-	E	□	-	□	-	□	-	□	-	□	-	M5	- Metric
Blank	-	C - Connector	2	-	2 - 2-Way	Voltages: *	Blank	-	Standard Options:	* Consult factory for availability of non-standard voltages and other options				
S - FKM Seals & PFPE Lube	-	T - Terminal Spades	3	-	3 - 3-Way	6 - 6 VDC	L	-	L - 0.040" orifice					
	-	V - Wire Leads		-		12 - 12 VDC	H	-	H - 0.060" orifice					
	-			-		24 - 24 VDC	V	-	V - Fluorocarbon seals					
	-			-			Non-Standard Options:							
	-			-			E	-	E - EPR seals					
	-			-			S	-	S - Silicone seals					
	-			-			D	-	D - Diode					