



# MAXIMATIC® 3- & 4-WAY VALVES



## 2-Position Single Solenoid Valves

1/4" & 3/8" NAMUR Style



**MME-33WESB-D012**



**MME-32QESB-D220**

Maximatic® 3-way and 4-way single solenoid spring return spool valves are also available in 1/4" NPT actuator mount or 3/8" NAMUR mount.

**Medium:** Air (40 micron filtration) or Inert Gas

**Operating Range:** 20 to 125 psig

**Electrical Connection:** DIN terminal with LED indicator ("-D"), or Grommet with 18" Wire Lead ("-W")

**Voltage:** 12-volt DC ("-012"), 24-volt DC ("-024"), 24-volt AC ("-24A"), 110-volt AC ("-110"), or 220-volt AC ("-220")

**Number of Ports:** 3 or 5


**Mounting:** Actuator (1/4" NPT only) or NAMUR (3/8" NPT only).

**Manual Override:** Locking

**Power Consumption:** 3 Watts


NAMUR/Actuator mount available on other 3- and 4-way Electronic and Air Pilot valves—  
Call for specifications.

### 3-Way Solenoid Valves

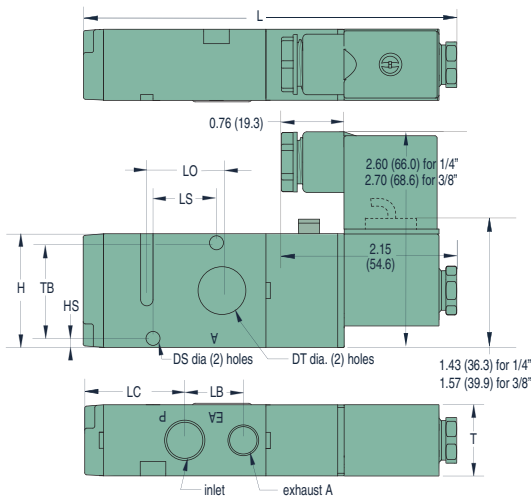

Dim.	1/4" NPT	3/8" NPT
DS	0.17 (4.3)	0.22 (5.6)
DT	0.72 (18.3)	0.78 (19.8)
H	1.38 (35.1)	1.58 (40.1)
HS	0.09 (2.3)	0.15 (3.8)
L	4.49 (114.0)	5.19 (131.8)
LC	1.21 (30.7)	1.57 (39.9)
LB	0.71 (18.0)	0.94 (23.9)
LO	0.91 (23.1)	0.94 (23.9)
LS	0.79 (20.1)	0.94 (23.9)
T	0.86 (21.8)	1.06 (26.9)
TB	1.14 (29.0)	1.26 (32.0)

### 4-Way Solenoid Valves

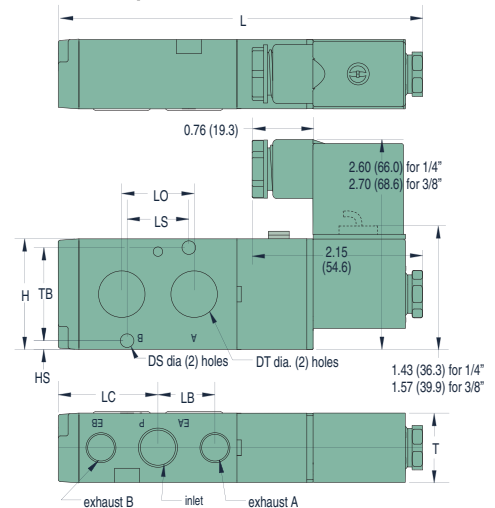

#### 3-Way Single Solenoid Valves

**MME-32QESB-**  
**MME-33WESB-**



#### Supply Port

1/4" NPT  
3/8" NPT

#### Outlet

0.72"  
0.78"

#### Exhaust


1/4" NPT  
1/4" NPT

#### Cv/scfm\*

0.89/49  
1.68/93

#### 4-Way Single Solenoid Valves

**MME-42QESB-**  
**MME-43WESB-**



#### Supply Port

1/4" NPT  
3/8" NPT

#### Outlet

0.72"  
0.78"

#### Exhaust

1/4" NPT  
1/4" NPT

#### Cv/scfm\*

0.89/49  
1.68/93

\* scfm based on flow @ 100 psig

Add Electrical Connection and Voltage Choices to the end of each Base Part Number - Example: **MME-42QESB-D110**