


# 10 mm & 15 mm MINIATURE VALVES




All of the benefits of Clippard quality and reliability are now available in these 10 mm and 15 mm valves. Offered in both Normally-Open or Normally-Closed models, these 2-way and 3-way valves are perfect for small and compact areas where pneumatic controls are needed.

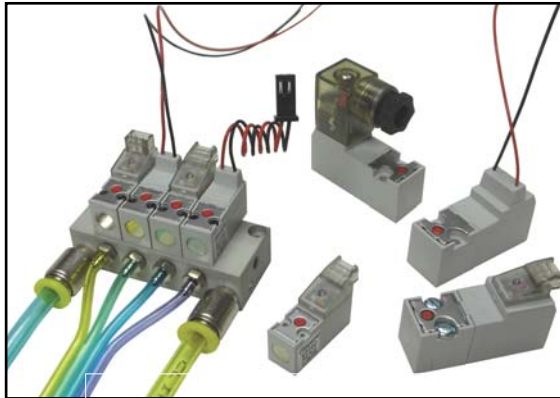

This series has a high strength, light-weight engineered glass filled nylon body, along with stainless steel, copper and Buna-N, making it suitable for a broad range of applications. With exceptional life and reliability this is the perfect sub-miniature valve for tomorrow's needs in a wide variety of industries.

All 10 mm and 15 mm valves are RoHS compliant.

## Typical Air Flow

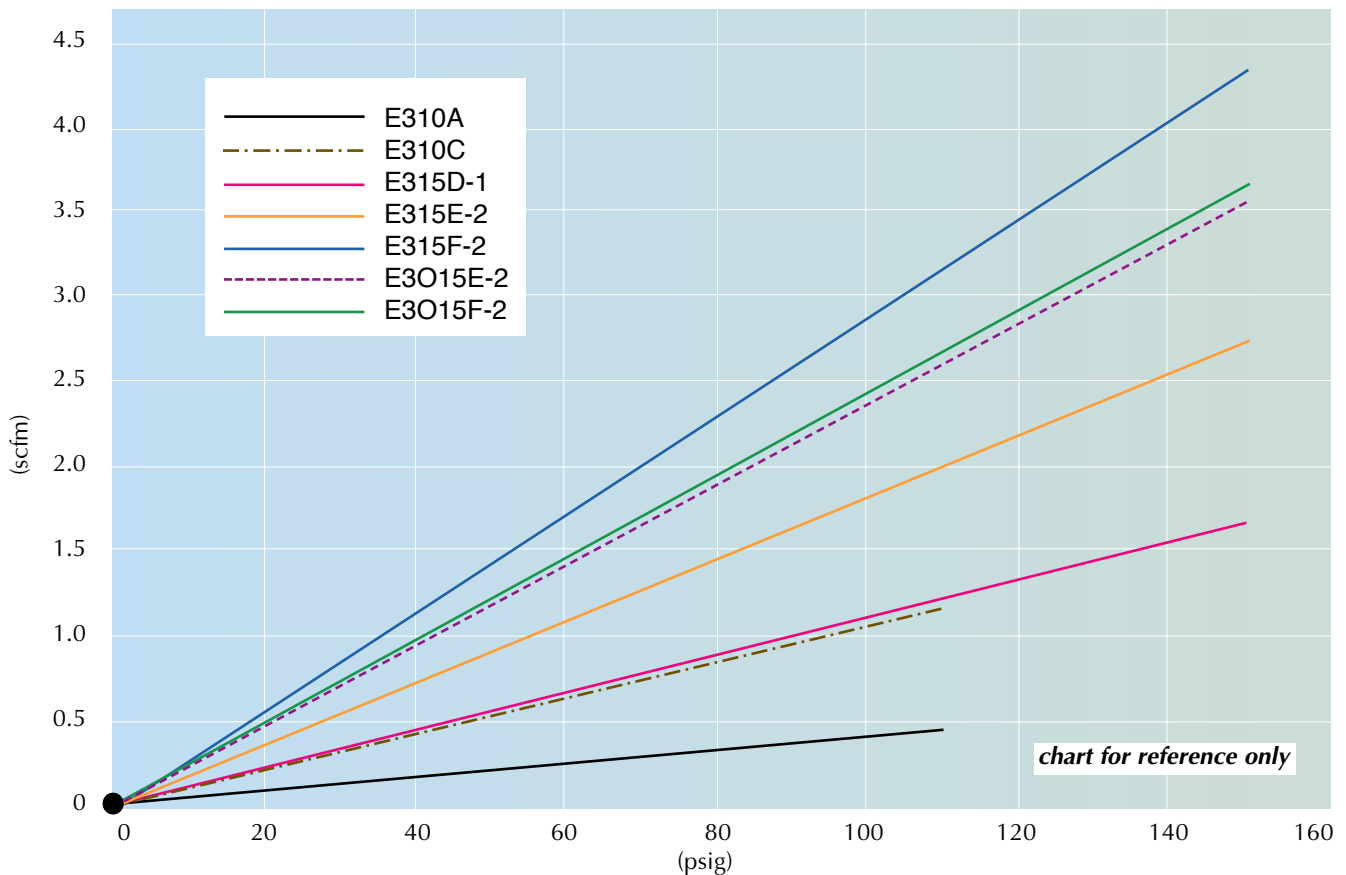

**Valve Material:** Glass filled Nylon, Stainless Steel, Buna-N or Fluorocarbon Elastomer

**Electrical:** The coil is constructed of copper wire and is isolated according to the class "F" standard. All circuitry and connections are protected from corrosion.

**Weight:** Weighing in at a mere 0.4 ounces is the 10 mm valve, and in the other corner the 15 mm checks in at 1.3 ounces!