





10 MM MINIATURE VALVES

Part Numbering System

Valve Type	Choose	<input type="text"/>
2-Way Normally-Closed	E210	<input type="text"/>
3-Way Normally-Closed	E310	
3-Way Normally-Open	E3010	
Orifice Size	Choose	<input type="text"/>
0.020" (0.5 mm)	A	<input type="text"/>
0.030" (0.75 mm)	C	
Power	Choose	<input type="text"/>
0.6 Watts	1	<input type="text"/>
1.3 Watts	2	
Electrical Connector	Choose	<input type="text"/>
In-Line Connector	F	<input type="text"/>
In-Line Connector with LED	C	
90° Connector	E	
90° Connector with LED	L	
Wire Leads, 11.8" (300 mm)	W	
Voltage	Choose	<input type="text"/>
12-Volt DC	012	<input type="text"/>
24-Volt DC	024	

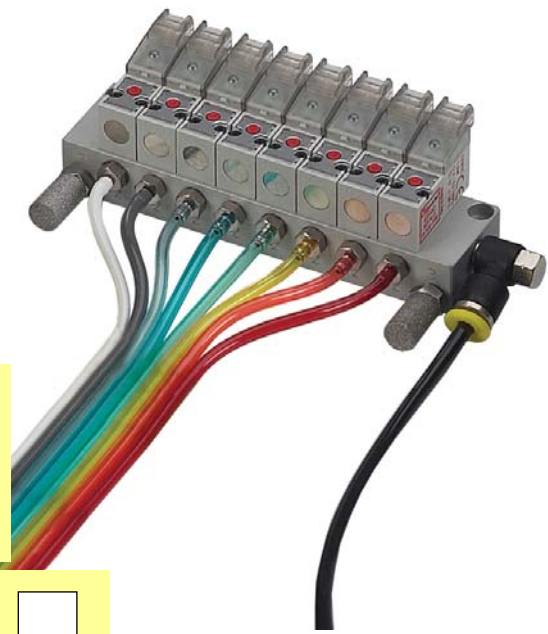

This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.



Example: **E210A - 1C012**



Another feature of the Clippard 10 mm valve is the ability to detach the coil and connector from the valve body. This can be useful for the purpose of orientating the coil by 180°, or exchanging connector types or voltages.



Normally-Closed	Silver
Normally-Open	Black

Clippard also helps you identify the valve you have by color coding the top plate. If it is silver, the valve is a Normally-Closed version—if it is black, the valve is Normally-Open.