



10 MM MINIATURE VALVES




Wire Leads

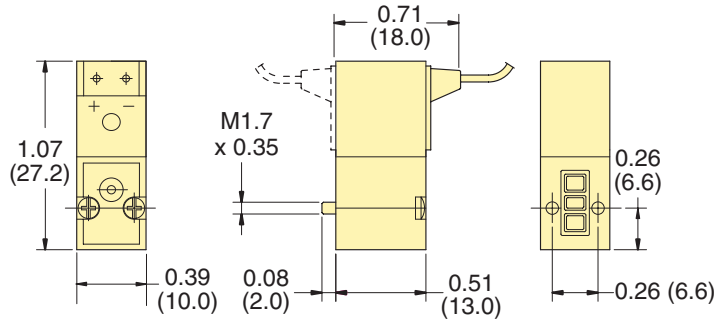

90° Connector

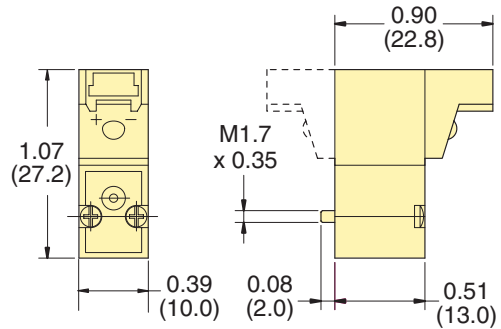

In-Line Connector

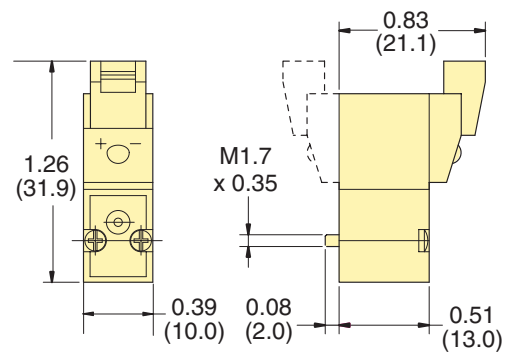

Electrical Specifications

Power (Wattage)	Voltage	Voltage Tolerance	Response Time (Energized)	Response Time (De-Energized)	Copper Wire Insulation Class
0.5	12 VDC 24 VDC	-10% to 10%	8 ms	10 ms	F 311°F (155°C)
1.3	12 VDC 24 VDC	-10% to 10%	8 ms	10 ms	F 311°F (155°C)