






Part Numbering System

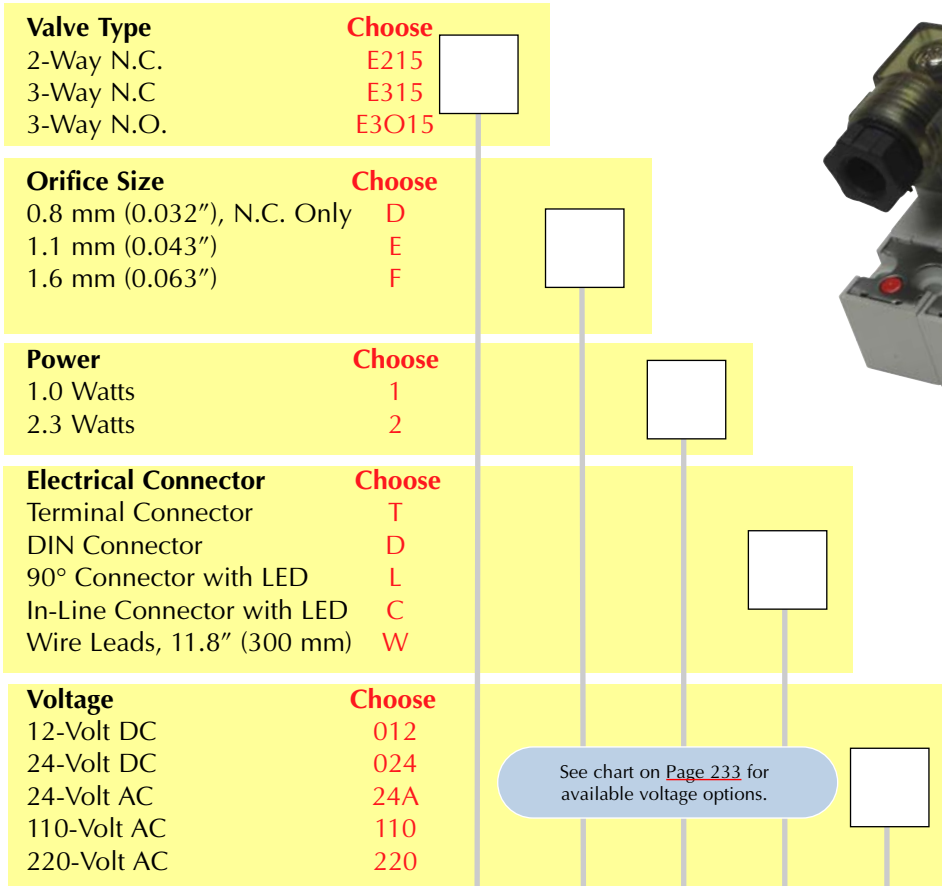

This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.



Example: **E315F-1C24A**

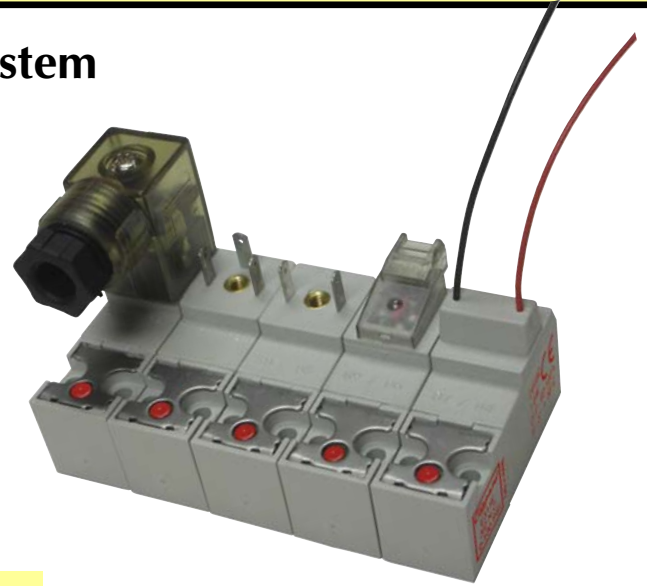

Custom plugs, wire lengths, connectors and flavors are available for your specific requirements. Call for details.

Electrical Specifications

Power (Wattage)	Voltage	Voltage Tolerance	Response Time (Energized)	Response Time (De-Energized)	Copper Wire Insulation Class
1.0	24 VDC	-10% to 10%	10 milliseconds	12 milliseconds	F 311°F (155°C)
2.3	12 VDC 24 VDC 24 VAC 110 VAC 220 VAC	-10% to 10%	10 milliseconds	12 milliseconds	F 311°F (155°C)