




CLIPPARD HOSE & TUBING

URT1-0503-□-□

5/32" O.D. 95A Polyurethane Tubing
Flexible, durable ether based tubing

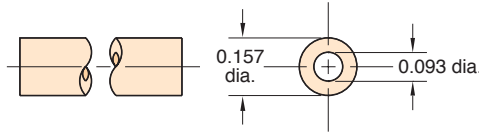


Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 500 psig at 70°F
Color: Solid: Black, gray, orange, red, white
Translucent: Blue, clear, green, red, yellow
Lengths Available: 50' and 500'
Bend Radius: 3/8"
Note: Designed for use with push-in fittings.

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

URT1-0604M-□-□

6 mm O.D. 95A Polyurethane Tubing
Flexible, durable ether based tubing

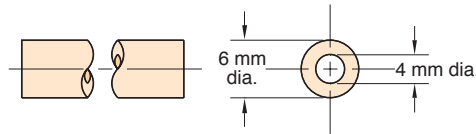


Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 450 psig at 70°F
Color: Solid: Black
Translucent: Blue, clear, green, red
Lengths Available: 50' and 500'
Bend Radius: 1/2"
Note: Designed for use with push-in fittings.

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

URT1-0805-□-□

1/4" O.D. 95A Polyurethane Tubing
Flexible, durable ether based tubing

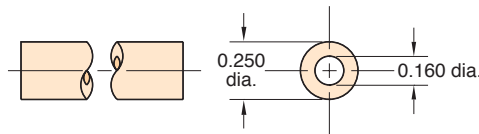


Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 450 psig at 70°F
Color: Solid: Black, gray, orange, red, white
Translucent: Blue, clear, green, red, yellow
Lengths Available: 50' and 500'
Bend Radius: 1/2"
Note: Designed for use with push-in fittings.

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

URT1-0805M-CLT-□

8 mm O.D. 95A Polyurethane Tubing
Flexible, durable ether based tubing

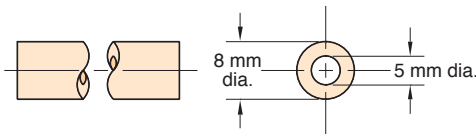

Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 465 psig at 75°F
Color: Clear
Lengths Available: 50' and 500'
Bend Radius: 3/4"
Note: Designed for use with push-in fittings.

URT1-1208-□-□

3/8" O.D. 95A Polyurethane Tubing
Flexible, durable ether based tubing



Working Range: 0 to 105 psig at 100°F Maximum 120°F
Static Burst Pressure: Over 440 psig at 75°F
Color: Solid: Black
Translucent: Blue, clear, green, red
Lengths Available: 50' and 500'
Bend Radius: 7/8"
Note: Designed for use with push-in fittings.

Note:

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.