


# 5/8" BORE STAINLESS STEEL CYLINDER



## SDD-10-□-□

Double Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Double Rod      **Maximum Stroke:** 20"  
**Options:** M, B, V, P6, P7, P8, N, W      For B option add 0.500  
 For M option add 0.312

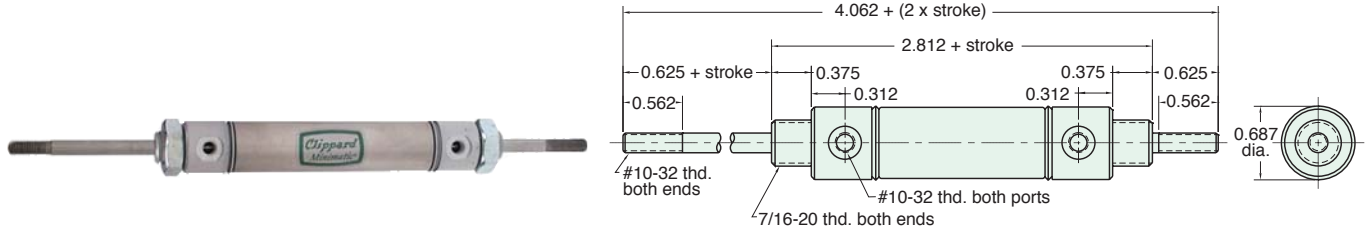


Nuts included, but not shown on drawing

## SRR-10-□-□

Reverse Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.3 lbs.  
**Options:** M, B, H, V, N, W      **Maximum Stroke:** 15"  
 For B option add 0.500  
 For M option add 0.312

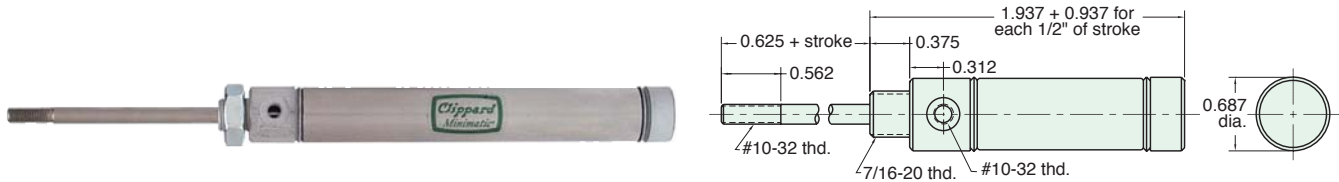


Nut included, but not shown on drawing

## URR-10-□-□

Reverse Acting

**Mount:** Universal      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 4 lbs. **Spring At Rest:** 1.3 lbs.  
**Options:** M, B, H, V, P2, N, W      **Maximum Stroke:** 14"  
 For B option add 0.375  
 For M option add 0.312

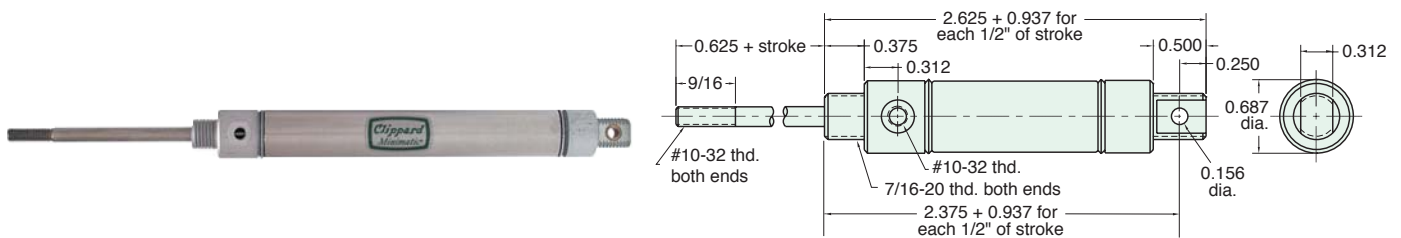

Furnished without nut(s). See Chart on Page 18.