3/4″ Bore Stainless Steel Cylinder

SRR-12-❑-❑

Reverse Acting

Mount: Stud
Type: Rotating Rod
Options: M, B, H, W, V, N

Standard Stroke Lengths: 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Spring Compressed: 6 lbs. **Spring At Rest:** 3 lbs.
Maximum Stroke: 16″

For B option add 0.375
For M option add 0.125

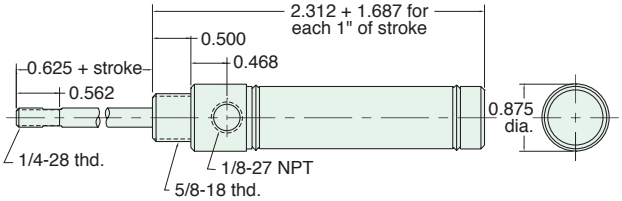

Nut included, but not shown on drawing

URR-12-❑-❑

Reverse Acting

Mount: Universal
Type: Rotating Rod
Options: M, B, H, W, V, P2, N, W

Standard Stroke Lengths: 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Spring Compressed: 6 lbs. **Spring At Rest:** 3 lbs.
Maximum Stroke: 15″

For B option add 0.500
For M option add 0.125

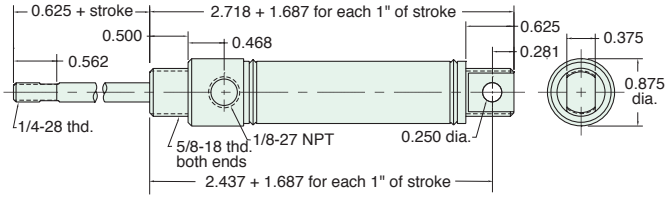

Furnished without nut(s). See Chart on Page 24.

SFD-12-❑-❑

Double Acting, Spring Bias

Mount: Stud
Type: Double Rod
Options: M, B, H, W, V, P6, P7, P8, N

Standard Stroke Lengths: 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Spring Compressed: 6 lbs. **Spring At Rest:** 3 lbs.
Maximum Stroke: 15″

For B option add 0.375

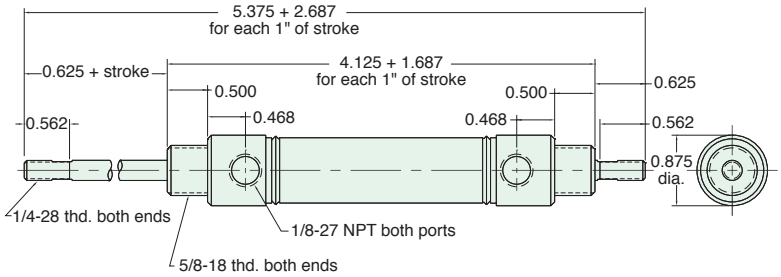

Nuts included, but not shown on drawing

SBR-12-❑-❑

Double Acting, Rear Spring Bias

Mount: Stud
Type: Rotating Rod
Options: M, B, H, W, V, P6, P7, P8, S, N

Standard Stroke Lengths: 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Spring Compressed: 6 lbs. **Spring At Rest:** 3 lbs.
Maximum Stroke: 15″

For B option add 0.375
For S option add 0.437

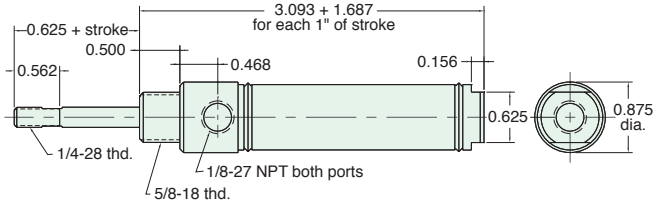

Nut included, but not shown on drawing