1 1/4″ Bore Stainless Steel Cylinder

Note: The 1 1/4″ bore is also available with a 7/16-20 threaded rod. Order -LR option.

SSN-20-❑-❑

Single Acting

Mount: Stud **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Non-Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4.5 lbs.
Options: M, B, H, V, S, N **Maximum Stroke:** 23″

For M option add 0.125
For S option add 0.312

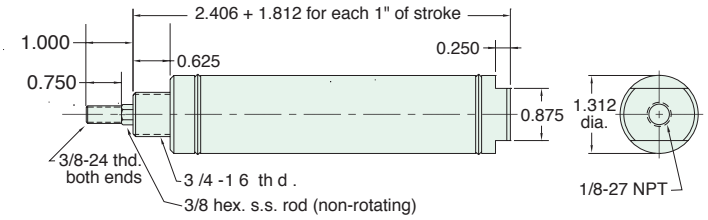

Nut included, but not shown on drawing

SSR-20-❑-❑

Single Acting

Mount: Stud **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4.5 lbs.
Options: M, B, H, V, S, N **Maximum Stroke:** 23″

For M option add 0.125
For S option add 0.312

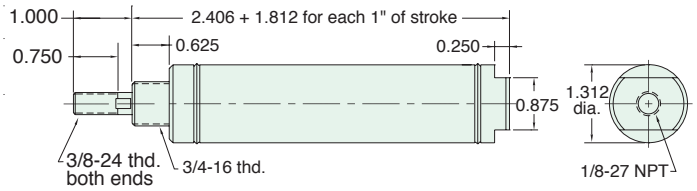

Nut included, but not shown on drawing

USN-20-❑-❑

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Non-Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4.5 lbs.
Options: M, B, H, V, P6, N **Maximum Stroke:** 22″

For M option add 0.125

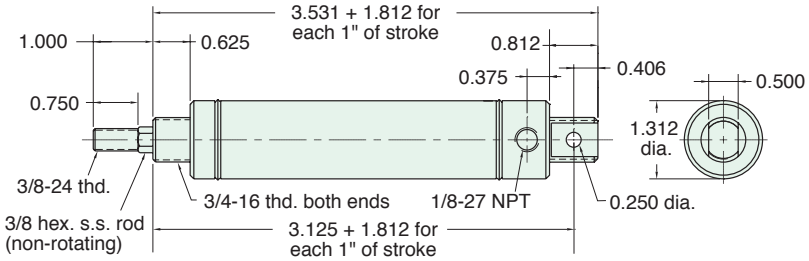

Furnished without nut(s). See Chart on Page 38.

USR-20-❑-❑

Single Acting

Mount: Universal **Standard Stroke Lengths:** 1/2″, 1″, 1-1/2″, 2″, 3″, 4″
Type: Rotating Rod **Spring Compressed:** 10 lbs. **Spring At Rest:** 4.5 lbs.
Options: M, B, H, V, P6, N **Maximum Stroke:** 22″

For M option add 0.125

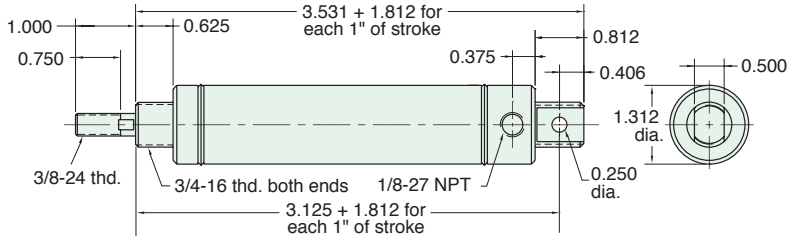

Furnished without nut(s). See Chart on Page 38.