


# 1 1/2" BORE STAINLESS STEEL CYLINDER



## FRR-24-□-□

Reverse Acting


**Mount:** Front      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, W, V, N      **Maximum Stroke:** 15"

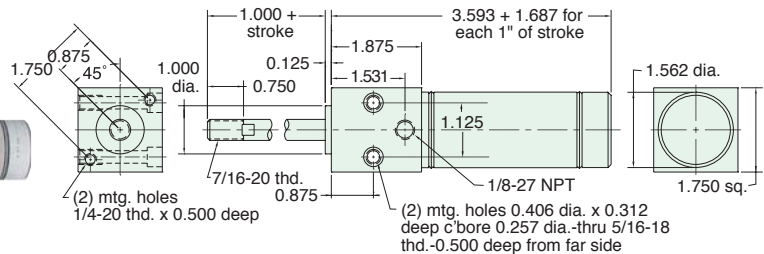

## SRR-24-□-□

Reverse Acting

**Mount:** Stud      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, W, V, N      **Maximum Stroke:** 15"

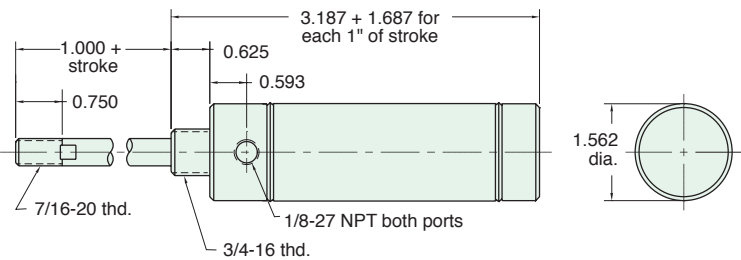


Nut included, but not shown on drawing

## CBR-24-□-□

Double Acting, Spring Bias

**Mount:** Clevis      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, W, V, P2, P3, P4, P5, P6, P7, P8, N      **Maximum Stroke:** 14"

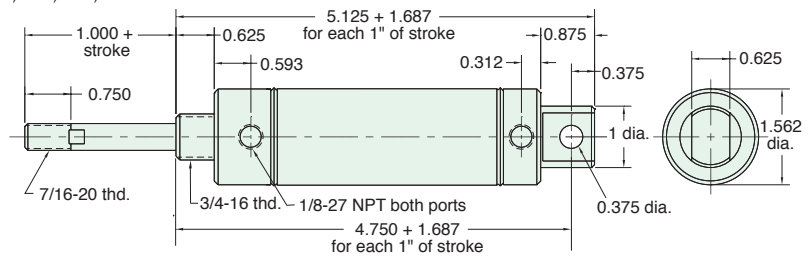


Furnished without nut(s). See Chart on Page 46.

## CFR-24-□-□

Double Acting, Front Spring Bias

**Mount:** Clevis      **Standard Stroke Lengths:** 1/2", 1", 1-1/2", 2", 3", 4"  
**Type:** Rotating Rod      **Spring Compressed:** 10 lbs. **Spring At Rest:** 4 1/2 lbs.  
**Options:** M, B, H, W, V, P2, P3, P4, P5, P6, P7, P8, N      **Maximum Stroke:** 23"

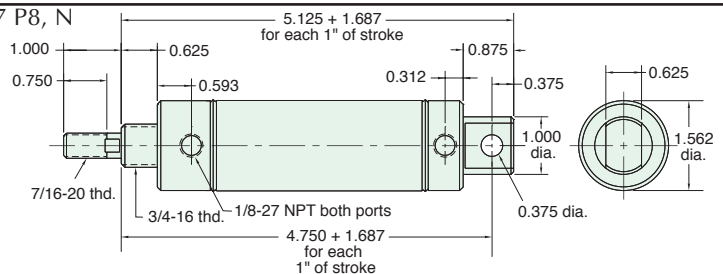

Furnished without nut(s). See Chart on Page 46.