

2 1/2" BORE STAINLESS STEEL CYLINDER



SDR-40-□-□


Double Acting



Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6"
Type: Rotating Rod **Maximum Stroke:** 39"
Options: C, F, R, M, W, V, P6, P7, P8, S, N

Bumpers are standard
 For M option add 0.312

For S option add 0.375

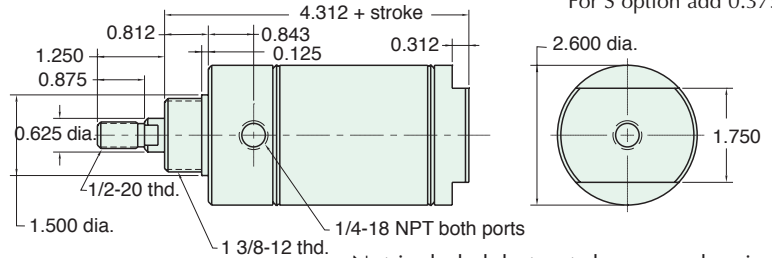

Nut included, but not shown on drawing

C, F, & R options use side ported rear head

UDR-40-□-□


Double Acting



Mount: Universal **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 7", 8", 10", 12"
Type: Rotating Rod **Maximum Stroke:** 38"
Options: C, F, R, M, W, V, P2, P3, P4, P5, P6, P7, P8, N

Bumpers are standard

For M option add 0.312

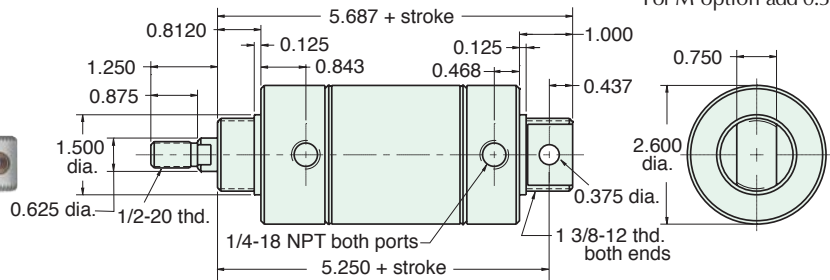

Furnished without nut(s). See Chart on Page 56.

SDD-40-□-□


Double Acting



Mount: Stud **Standard Stroke Lengths:** 1", 2", 3", 4", 5", 6", 8", 10", 12"
Type: Double Rod **Maximum Stroke:** 18"
Options: C, F, M, W, V, P6, P7, P8, N

Bumpers are standard

For M option add 0.312

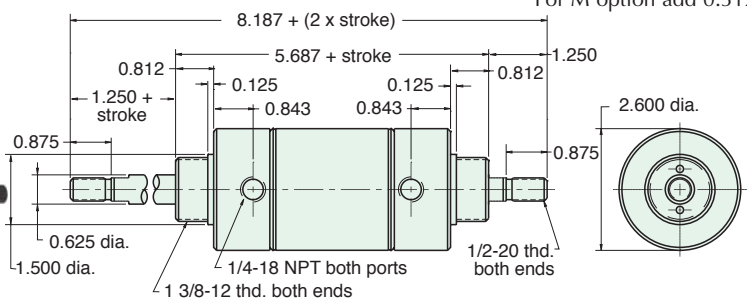

Nut included, but not shown on drawing

Did you know that all Clippard Cylinders are 100% tested.