



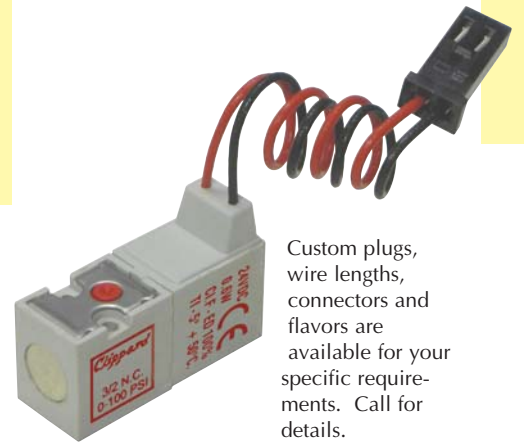

Part Numbering System


Valve Type 2-Way N.C. 3-Way N.C. 3-Way N.O.	Choose E215 E315 E3O15	<input type="text"/>
Orifice Size 0.8 mm (0.032"), N.C. Only 1.1 mm (0.043") 1.6 mm (0.063")	Choose D E F	<input type="text"/>
Power 1.0 Watts 2.5 Watts	Choose 1 2	<input type="text"/>
Electrical Connector Terminal Connector DIN Connector 90° Connector with LED In-Line Connector with LED Wire Leads, 11.8" (300 mm)	Choose T D L C W	<input type="text"/>
Voltage 12-Volt DC 24-Volt DC 24-Volt AC 110-Volt AC 220-Volt AC	Choose 012 024 24A 110 220	<input type="text"/>

See chart on [Page 213](#) for available voltage options.

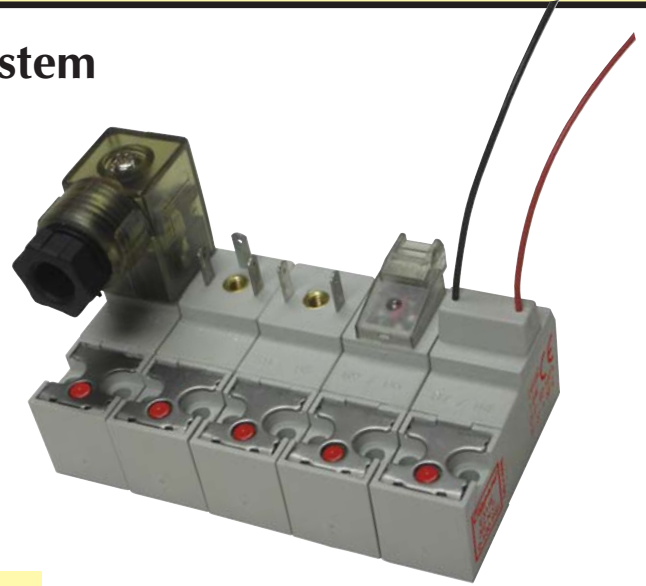

Custom plugs, wire lengths, connectors and flavors are available for your specific requirements. Call for details.

This numbering schematic is shown for illustration purposes only. All possible configurations are not available. For standard models, see the products illustrated in this catalog.



Example: **E315F - 2L024**

Electrical Specifications

Power (Wattage)	Voltage	Voltage Tolerance	Response Time (Energized)	Response Time (De-Energized)	Coil Insulation Class
1.0	24 VDC	-10% to 10%	10 milliseconds	12 milliseconds	F 311°F (155°C)
2.5	12 VDC 24 VDC 24 VAC 110 VAC 220 VAC	-10% to 10%	10 milliseconds	12 milliseconds	F 311°F (155°C)