




# CLIPPARD HOSE & TUBING

## 5/32" O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing

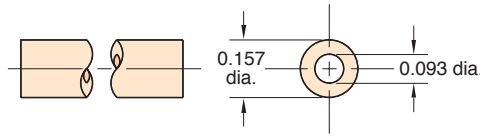

Part No.

URT1-0503-

**Note:**

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

**Working Range:** 0 to 105 psig at 100°F Maximum 120°F

**Static Burst Pressure:** Over 500 psig at 70°F

**Color:** Solid: Black, gray, orange, red, white  
Translucent: Blue, clear, green, red, yellow


**Lengths Available:** 50' and 500'

**Bend Radius:** 3/8"

**Note:** Designed for use with push-in fittings.

## 6 mm O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing

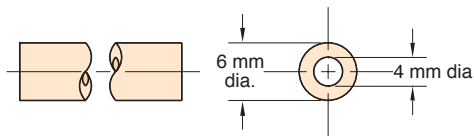

Part No.

URT1-0604M-

**Note:**

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

**Working Range:** 0 to 105 psig at 100°F Maximum 120°F

**Static Burst Pressure:** Over 450 psig at 70°F

**Color:** Solid: Black  
Translucent: Blue, clear, green, red


**Lengths Available:** 50' and 500'

**Bend Radius:** 1/2"

**Note:** Designed for use with push-in fittings.

## 1/4" O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing

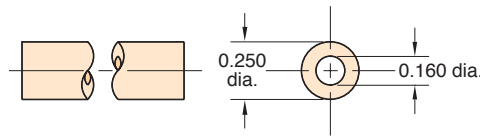

Part No.

URT1-0805-

**Note:**

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

**Working Range:** 0 to 105 psig at 100°F Maximum 120°F

**Static Burst Pressure:** Over 450 psig at 70°F

**Color:** Solid: Black, gray, orange, red, white  
Translucent: Blue, clear, green, red, yellow


**Lengths Available:** 50' and 500'

**Bend Radius:** 1/2"

**Note:** Designed for use with push-in fittings.

## 8 mm O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing

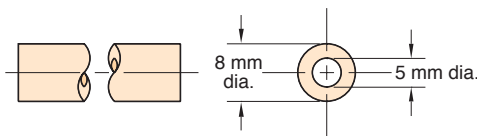

Part No.

URT1-0805M-CLT-

**Working Range:** 0 to 105 psig at 100°F Maximum 120°F

**Static Burst Pressure:** Over 465 psig at 75°F

**Color:** Clear


**Lengths Available:** 50' and 500'

**Bend Radius:** 3/4"

**Note:** Designed for use with push-in fittings.

## 3/8" O.D. 95A Polyurethane Tubing

Flexible, durable ether based tubing

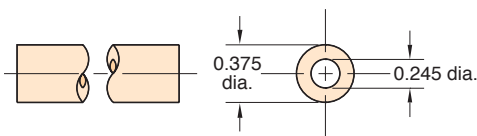

Part No.

URT1-1208-

**Note:**

Specify color on order, and use full product number (including code letters for color) as shown in Price List. If no color is specified, clear will be furnished.

**Working Range:** 0 to 105 psig at 100°F Maximum 120°F

**Static Burst Pressure:** Over 440 psig at 75°F

**Color:** Solid: Black  
Translucent: Blue, clear, green, red

**Lengths Available:** 50' and 500'

**Bend Radius:** 7/8"

**Note:** Designed for use with push-in fittings.