

Clippard


PROPORTIONAL VALVES



Proportional Valves

EVP Series Proportional Valve

Precision-built utilizing Clippard's renowned Spider Technology with the additional capability for proportional control. The EVP provides air or gas flow control and varies the output flow based on the current input to the solenoid. Controllability and overall value are the main features of this series. The consistent gain of the EVP provides a high degree of control.

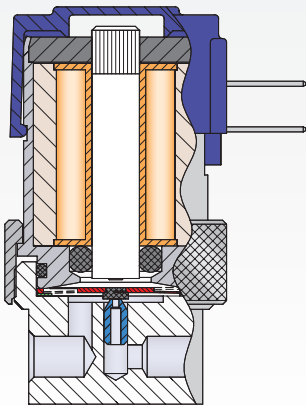

p. 4

3 voltage coils

≤10% hysteresis


~±10% of given flow target

Fast response

Spider Technology for long life

DVP Series Proportional Valve

The DVP series offers an extremely high cycle life, fast response, linear flow gain, low power consumption, and flows over 60 l/min. The DVP provides air or gas flow control and varies the output flow based on the current input to the solenoid.

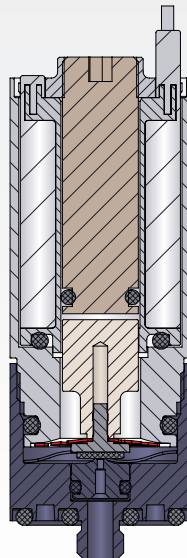

p. 8


Higher flow (over 60 l/min)

Fast response

Spider Technology for long life

PV Series 8 mm Micro Proportional Valve

The tiny PV series provides precise, linear control for accurate dosing and flow regulation in critical applications. With low power consumption, they offer excellent energy efficiency while maintaining quiet operation and minimal vibration. Their versatile design makes them suitable for a wide range of medical, diagnostic, and industrial applications.



p. 14

Ideal for compact assemblies

Eliminates downstream pulsations


Low current power

Low to no noise

Highly customizable performance

SCPV Series Stepper Needle Valve

Utilizing the industry's most robust and powerful linear actuator, the SCPV series stepper-controlled proportional valve is ideal for critical medical, analytical, and industrial automation applications that require high resolution, high flow, low hysteresis, and variable control of inert gases.

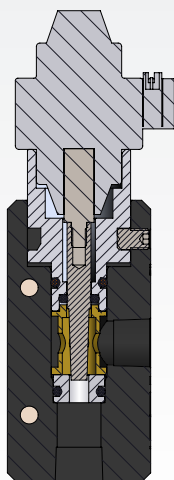

p. 16

High accuracy stepper-driven needle valve

Fully customizable design


Very low hysteresis

"Set it and forget it" control

0.001" (0.03 mm) step resolution

Eclipse Proportional Isolation Valve

The patented, stepper-controlled Eclipse proportional isolation valve leads the industry in performance and durability. This valve is ideal in critical applications for liquid and gas delivery, medical, analytical and industrial automation requiring ultra fine resolution and excellent repeatability. In addition, the unique design allows for custom flow profiles.

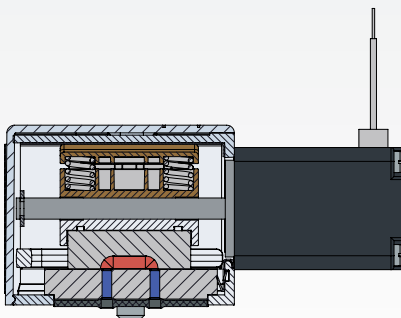

p. 18

Ceramic sliding seal

Liquid capable

Zero dead volume (fully flushable)

0.0009 in³ (0.0154 cm³)

Unique, patented design

Ultra-fine resolution


EVP PROPORTIONAL VALVES



The EVP series proportional control valves combine the features of the existing EV series valve—long life, low power, and Clippard's reputation for high quality components—with the additional capability for proportional control. The EVP series valve provides air or gas flow control and varies the output flow based on the current input to the solenoid.

Controllability and overall value are the main features of the EVP proportional valve series. The consistent gain of this valve provides a high degree of control for many applications. The valve may be controlled using DC current, open or closed-loop control, and even PWM (pulse width modulation) to cover a broad range of applications.


Typical Performance

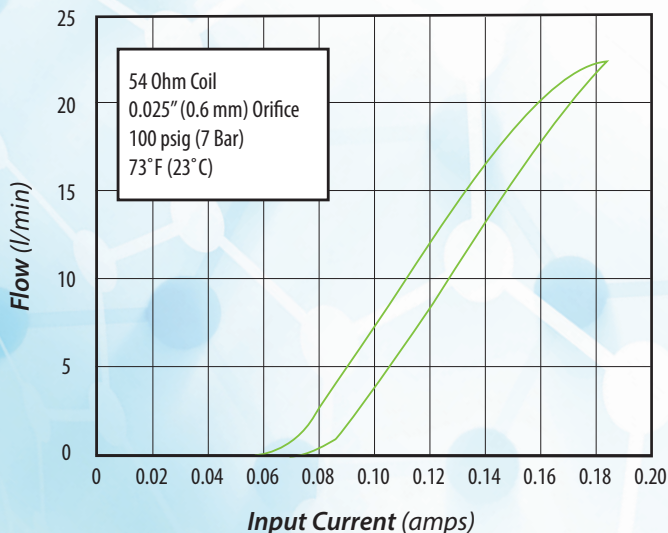


The above flow curve is a typical calibration record for the EVP. All proportional valves have a stored calibration data sheet readily available upon request.

Coil Resistance	13.5, 54, 218 Ω @ 72°F (22°C)
Connection	Square pin, terminal spades, or 18" (45.7 cm) wire leads
Current	0 to 0.370 A, 0 to 0.185 A, 0 to 0.092 A
Driver	EVPD (optional)
Filtration	40 micron filter (recommended)
Flow Range	Up to 22 l/min
Function	2-way normally-closed proportional
Material, Body	Nickel plated brass
Material, Seals	Nitrile, FKM, or EPDM
Material, Seat	Stainless steel
Material, Wetted	ENP brass, ENP steel, stainless steel
Max. Flow	$\pm 10\%$ of target flow
Max. Hysteresis	$\leq 10\%$ of full current
Max. psig	100 psig (7 bar)
Medium	Clean, dry air or inert gases
Mount	In-line threaded ports or manifold
Number of Ports	2
Operating Pressure	Vac. to 100 psig (0.3 to 7 bar)
Operating Temp. Range	32 to 120°F (0 to 48°C)
Orifice	0.009", 0.013", 0.025", 0.040", 0.060" (0.23, 0.33, 0.64, 1.00, 1.52 mm)
Port, Inlet	#10-32 female or manifold stud
Port, Outlet	#10-32 female or manifold outlet hole
Power Requirement	1.9 watts @ 72°F (22°C); 2.3 watts max.
Voltage	5, 10, or 20 VDC nominal
Wattage	1.9 watts @ 72°F (22°C), 2.3 watts max.
More Details	clippard.com/link/evp-series

Inline Mount

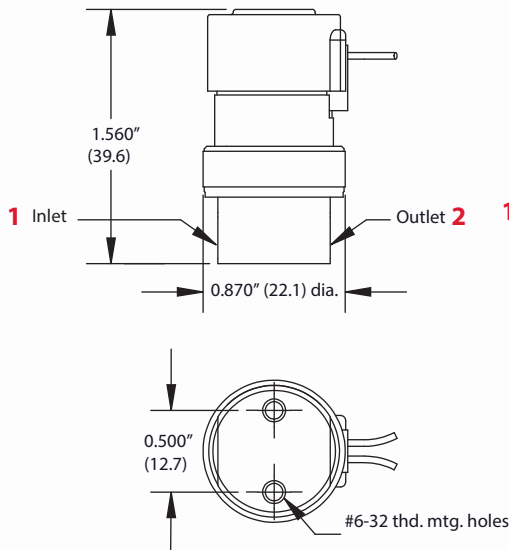

Manifold Mount

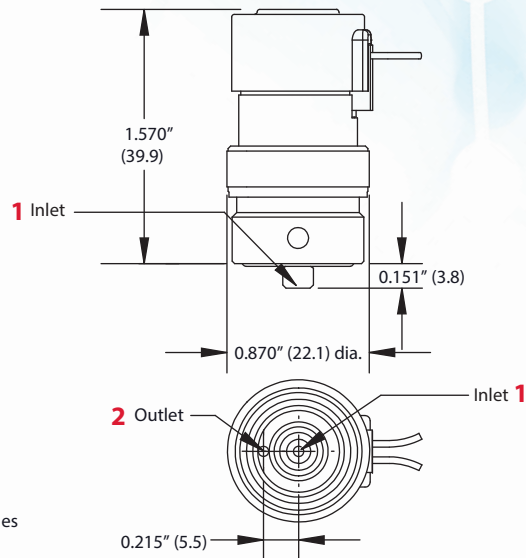






Manifolds

15490-1	Pilot Manifold #10-32 Inlet, 1/8" NPT Outlet
15490-2	Single Supply 1/8" NPT Inlet, #10-32 Outlet
15490-3	Dual Supply 1/8" NPT Inlet, #10-32 Outlet
15491-1	Side-Ported #10-32 Inlet, 1/8" NPT Outlet
15491-2	Side-Ported 1/8" NPT (R1/8) Inlet, #10-32 Outlet
15490-5	Single-Station 1/8" NPT Inlet, 1/8" NPT Outlet
15481-2	Single-Sided 2-Station
15481-4	Single-Sided 4-Station
15481-6	Single-Sided 6-Station
15482-8	Double-Sided 8-Station
15482-12	Double-Sided 12-Station

Dimensions shown are in inches (millimeters listed in parentheses).
Visit clippard.com for more detailed 2D and 3D drawings.

- Flow proportional to input current
- Fast response and long life

ORDERING INFORMATION

E		-	P		-		-				
Electrical Connection											
C	Connector					Voltage	Seal				
T	Terminal Spades	Mounting					05	0 to 5 VDC	(blank)	Nitrile	
V	Wire Leads	(blank)	Base Mount					10	0 to 10 VDC	E	EPDM ¹
		M	Manifold Mount					20	0 to 20 VDC	V	FKM ¹
Orifice*										Maximum Pressure (5 psig to 100 psig)	
09	0.009" (0.23) dia., 2.7 l/min ±10%, max. 100 psig (7 bar)									00	In increments of 5, from 05 to 95
13	0.013" (0.33) dia., 6.7 l/min ±10%, max. 100 psig (7 bar)									A0	100 psig
25	0.025" (0.64) dia., 22.0 l/min ±10%, max. 100 psig (7 bar)										
40	0.040" (1.02) dia., 18.7 l/min ±10%, max. 50 psig (3.4 bar)										
60	0.060" (1.52) dia., 14.0 l/min ±10%, max. 25 psig (1.7 bar)										
¹ Min. order quantity required for EPDM or FKM											

¹Min. order quantity required for EPDM or FKM seals.


Please Note: Not all possible configurations are valid.
Consult the online configurator at clippard.com.

Example Part Number:
EC-P-05-0925

For more info, scan the
QR code or visit
clippard.com/link/evp-series



A Close-Up of the EVP Series

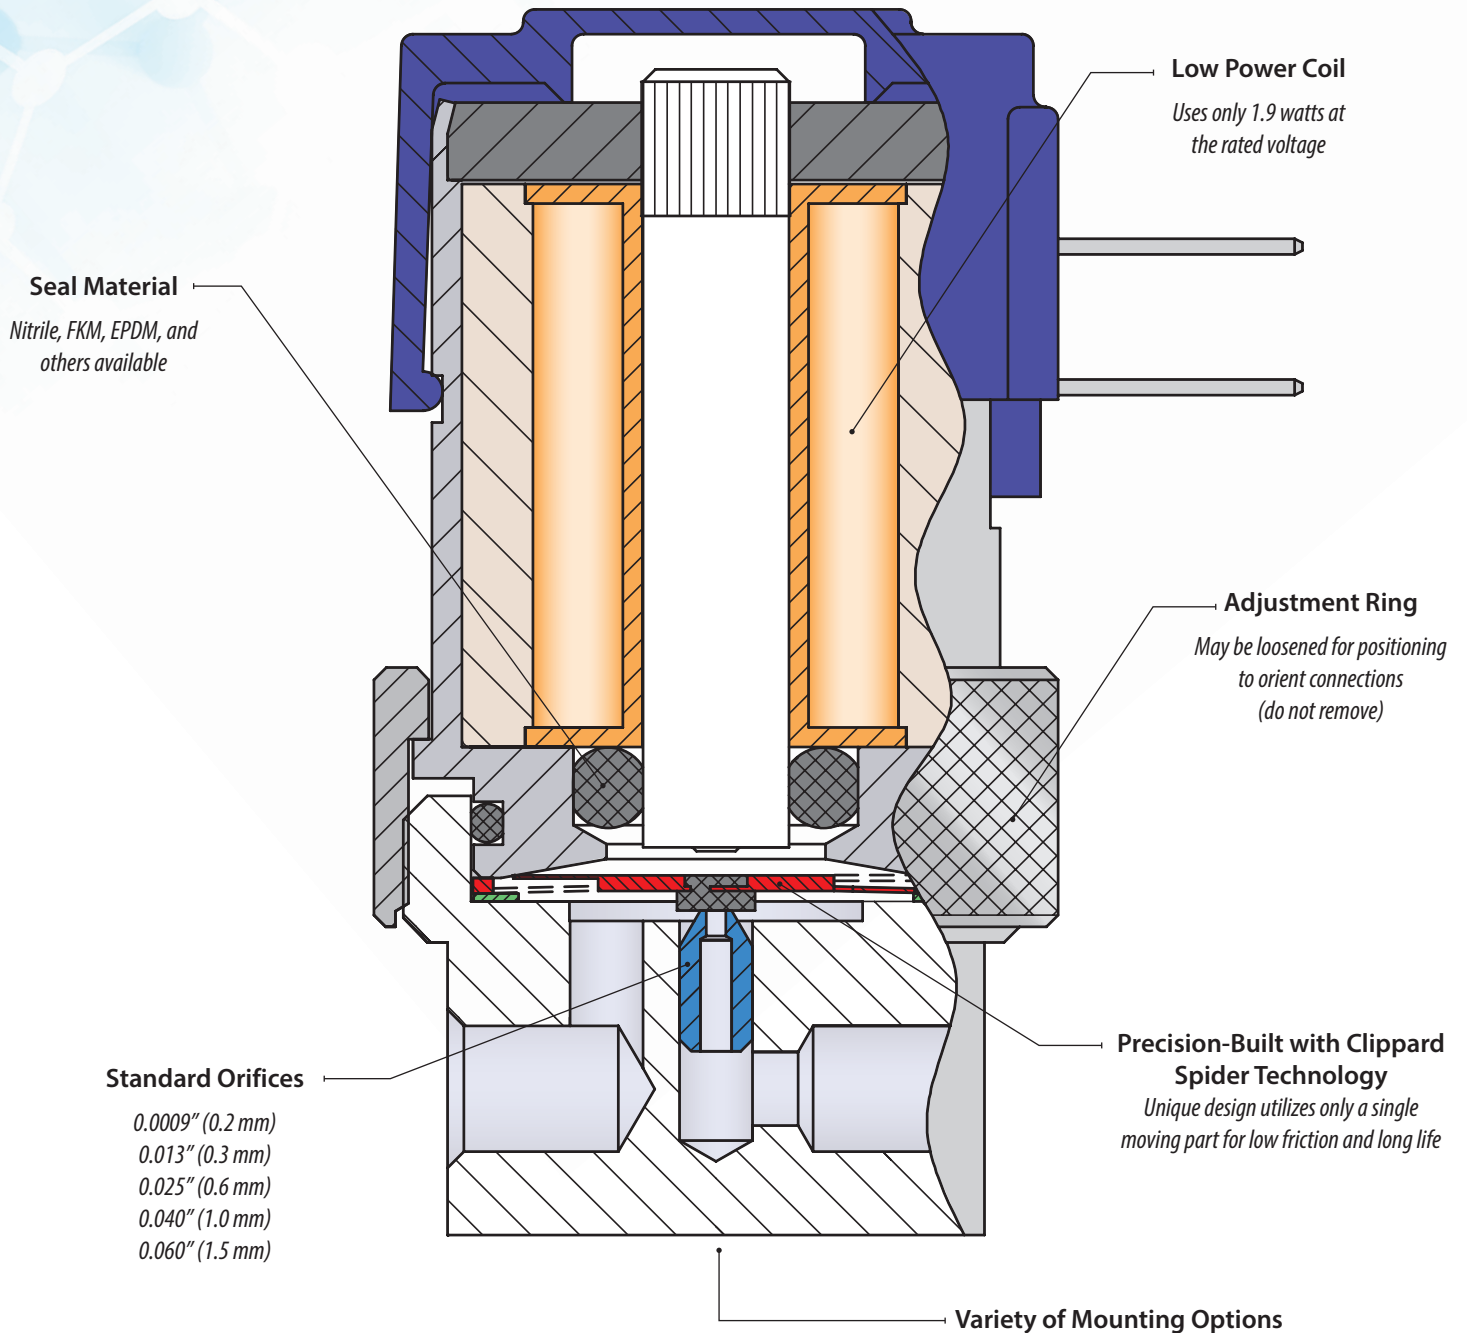

How to Select Your EVP Proportional Valve

When choosing your valve, there are many variables to consider. To select the best valve for your application, focus on:

- 1 **Control Signal**
- 2 **Valve Orifice**
- 3 **Operating Pressure**

Please Note: It is important to specify and use a calibrated valve that matches your application. Be sure to use a valve set to your operating pressure. Otherwise, the required power for opening the valve will be high and the resolution to set your flow proportional will be poor.

1 CONTROL SIGNAL

Voltage Range	Input Current Range	Coil Resistance	Max. Voltage Required
0 to 5 VDC @ 72°F (22°C)	0 to 0.370A	13.5 ohms @ 72°F (22°C)	6.2 VDC
0 to 10 VDC @ 72°F (22°C)	0 to 0.185A	54 ohms @ 72°F (22°C)	12.4 VDC
0 to 20 VDC @ 72°F (22°C)	0 to 0.092A	218 ohms @ 72°F (22°C)	24.8 VDC


Note: Do not exceed input current range

2 VALVE ORIFICE (Maximum Working Pressure)

Orifice Diameter	Rated Pressure	Flow at Max. Current (±10%)
0.009" (0.23 mm)	100 psig (7 bar)	2.7 l/min @ 100 psig (7 bar)
0.013" (0.33 mm)	100 psig (7 bar)	6.7 l/min @ 100 psig (7 bar)
0.025" (0.64 mm)	100 psig (7 bar)	22.0 l/min @ 100 psig (7 bar)
0.040" (1.02 mm)	50 psig (3.4 bar)	18.7 l/min @ 50 psig (3.4 bar)
0.060" (1.52 mm)	25 psig (1.7 bar)	14.0 l/min @ 25 psig (1.7 bar)

Note: Maximum flow is measured at maximum pressure

3 OPERATING PRESSURE - Maximum Flow vs. Operating Pressure

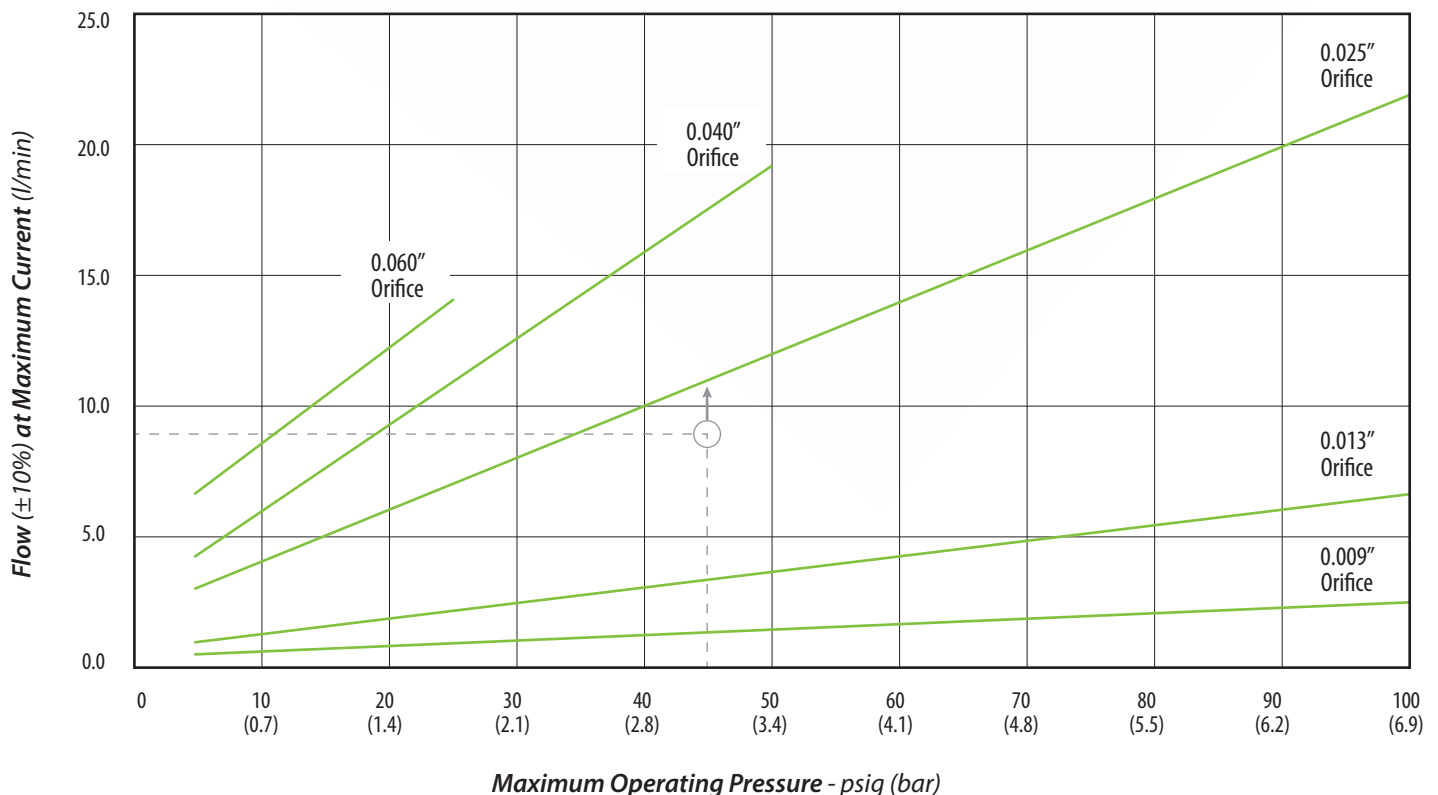

To determine the correct orifice required, locate the colored line immediately above the flow/pressure intersection.
Example: 9 slpm required at 45 psig inlet. This example leads to a ~2545" valve (0.025" nozzle, 45 psig).

DVP PROPORTIONAL VALVES




Clippard's DVP series proportional solenoid valves are precision-built 2-way control valves. With its solid, compact design, long life, and exceptionally high flow rates, these valves are suitable for a wide variety of applications across many different industries.

The DVP valve provides air or gas flow control and varies the output flow based on the current input to the solenoid. The valve's consistent gain provides a high degree of control. It may be controlled using DC current, open or closed-loop control, and even pulse width modulation (PWM) to cover a large range of applications.


Coil Resistance	52.6, 210.5 Ω @ 72°F (22°C)
Connection	Terminal spades or 18" (45.7 cm) wire leads
Current	0 to 0.190 A, 0 to 0.095 A
Driver	EVPD (optional)
Filtration	40 micron filter (recommended)
Function	2-way normally-closed proportional
Material, Body	Stainless steel
Material, Seals	FKM, nitrile, EPDM, or silicone
Material, Seat	Stainless steel
Material, Wetted	304 stainless steel, PPS
Max. Flow	+10%, -0%
Medium	Air or compatible gases
Mount	Manifold, #10-32 male stud
Number of Ports	2
Operating Pressure	Vac. to 100 psig (7 bar)
Operating Temp. Range	32 to 120°F (0 to 49°C)
Port, Inlet	Manifold stud
Port, Outlet	Manifold outlet hole
Voltage	10 or 20 VDC nominal
Wattage	1.9 watts @ 72°F (22°C), 2.5 watts max.
More Details	clippard.com/link/dvp-series

Typical Performance

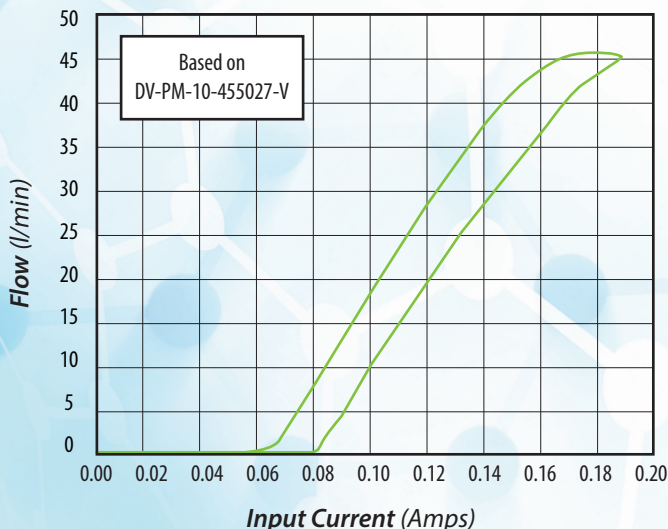


The above flow curve is a typical calibration record for the DVP. All proportional valves have a stored calibration data sheet readily available upon request.

Spade Terminals

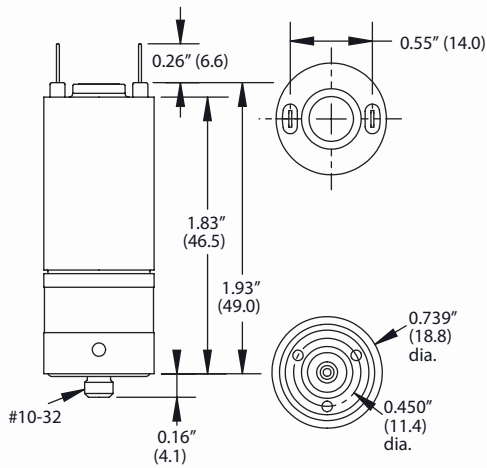

Wire Leads

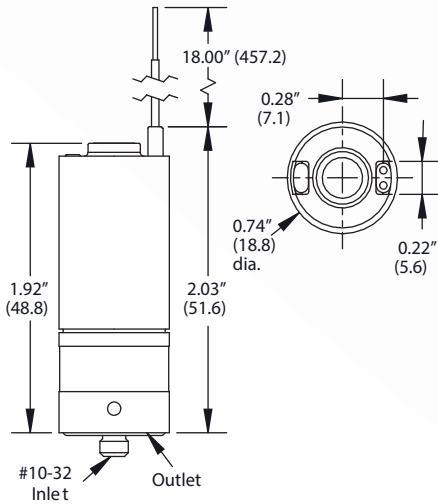

Manifolds

15490-5	Single-Station, ENP Brass
15781-2	2-Station, Black Anodized Aluminum, 1/8" NPT
15781-4	4-Station, Black Anodized Aluminum, 1/8" NPT
15481-6	6-Station, Black Anodized Aluminum, 1/8" NPT

Dimensions shown are in inches (millimeters listed in parentheses).

Visit clippard.com for more detailed 2D and 3D drawings.

- Extremely low hysteresis
- Low heat rise / low power
- Flow proportional to input current
- Robust stainless steel spring, base, and housing
- Industry standard for leak-free operation

ORDERING INFORMATION

D **□** - **P** **M** - **□** - **□** - **□** - **□**

Electrical Connection

T Spade Terminals
V Wire Leads (Axial)

Voltage

10 10 VDC
20 20 VDC

Flow

In increments of 1, from 010 to 678
(1.0 l/min to 67.8 l/min)

Example: 300 (300 l/min)

Operating Pressure

In increments of 1,
from 005 to 100
5 psig (0.4 Bar) to
100 psig (6.9 Bar)

Example: 040 (40 psig, 2.8 bar)

Seals

V FKM (standard)
(blank) Nitrile
E EPDM¹
S Silicone¹

¹Min. order quantity required
for EPDM or silicone seals

Example Part Number:


DT-PM-10-300-040-V

For more info, scan the
QR code or visit

clippard.com/link/dvp-series



A Close-Up of the DVP Series

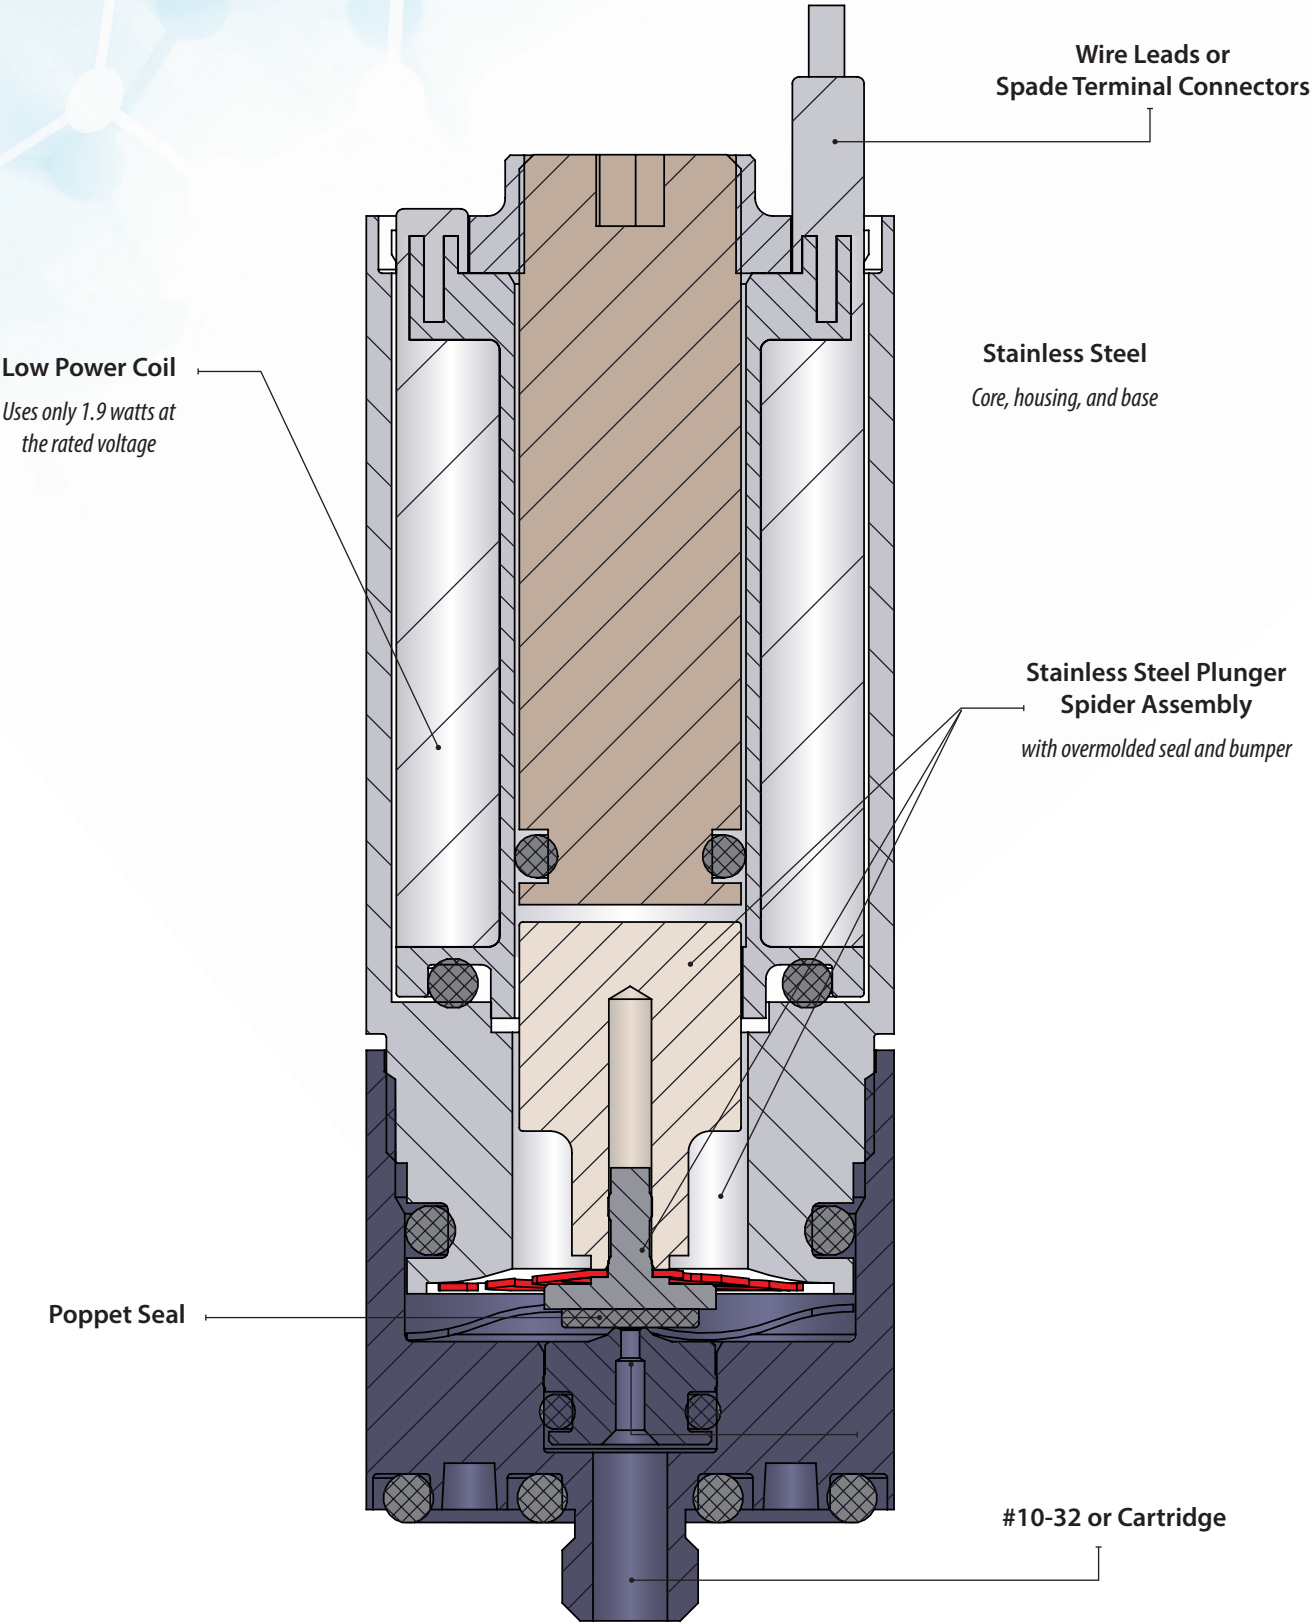

How to Select Your DVP Proportional Valve

Proportional flow is achieved by varying the current input to the valve. It is crucial to specify and use a calibrated valve that matches your application. To ensure you have a valve that will perform well for your specific requirements, be sure to use a valve set to your operating pressure.

The flow capabilities shown below in green are standard configurable options. The flow capabilities shown in blue are available as a special custom option. Contact Clippard for more details.

To select your valve, reference the flow chart and list your operating pressure in a 3-digit format (065 = 65 psig). Next, specify your desired maximum flow rate for your pressure (500 = 50.0 l/min). Accurately specify your nominal operating pressure and flow to ensure the best performance and resolution for your application.

For nominal operating pressures under 5 psig, use a 005 designator for pressure. For vacuum applications, use the positive pressure equivalent and reverse the ports.

When choosing your valve, there are many variables to consider. To select the best valve for your application, focus on:

- 1 Control Signal
- 2 Operating Pressure


Please Note: It is important to specify and use a calibrated valve that matches your application. Be sure to use a valve set to your operating pressure. Otherwise, the required power for opening the valve will be high and the resolution to set your flow proportional will be poor.

1 CONTROL SIGNAL


Voltage Range	Input Current Range	Coil Resistance	Max. Voltage Required
0 to 10 VDC @ 72°F	0 to 0.190A	52.6 ohms @ 72°F	13 VDC
0 to 20 VDC @ 72°F	0 to 0.095A	210.5 ohms @ 72°F	26 VDC

Note: Do not exceed input current range

2 OPERATING PRESSURE - Flow vs. Operating Pressure

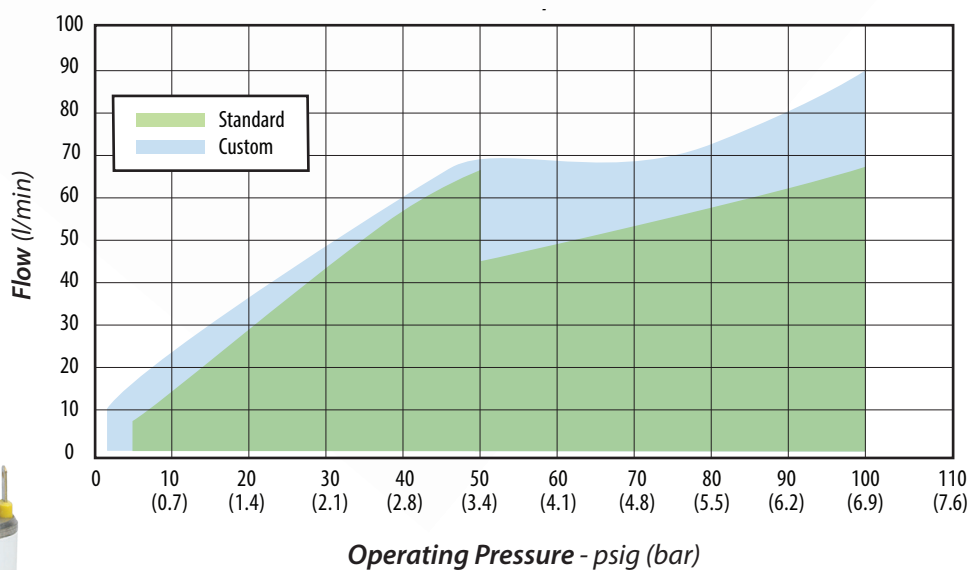

EVP / DVP DRIVER

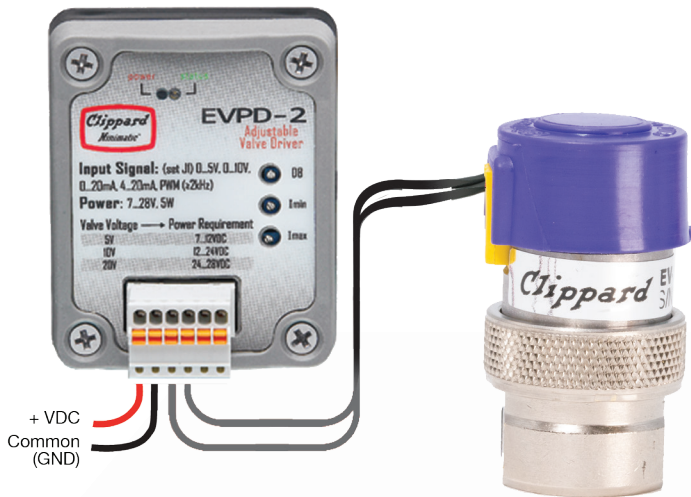

The EVPD proportional valve driver fast-tracks valve control applications. This product is ideal for laboratories and OEM product development and can be customized to fit OEM applications including control parameters. The EVPD produces driver current for Clippard's EVP or DVP series valves proportional to input control signals.

- Plug-and-play interface between Clippard's EVP and DVP series valves and PLCs or other controls
- Linearized valve response right "out of the box"
- Three selectable valve output ranges
- Five signal inputs to choose from
- Easy integration with existing machine controls
- User-adjustable parameters
- Automatic temperature compensation to maintain constant current
- Two configuration options: stand-alone PCB or enclosed in housing
- Compact size

Adjustment	Min. drive current, max. drive current, command deadband
Command Set-Point Signal Type	Selectable: 0 to 5 VDC, 0 to 10 VDC, 0 to 20 mA, 4 to 20 mA, PWM @ ≥ 2 kHz duty cycle
Connection	Screw terminals or DIN connector
Input Impedance	200 k Ω
LED Indicators	Power, activity, status, and faults
Mount	Mounting holes or DIN rail
Operating Temp. Range	0 to 155°F (-18° to 68°C)
Output	0 to 400 mA (selectable range)
Power Requirement	7 to 28 VDC @5 watt
More Details	clippard.com/link/evpd-driver


The tuning adjustments on the EVPD allow the user to adjust the command signal needed to start opening the valve, adjust the opening current to the valve, and limit the maximum current to the valve to restrict the valve maximum opening and prevent current beyond the valve solenoid's rating. The settings are used by the valve management software in the microcontroller along with driver current feedback to calculate command instructions to the digital PWM controller.

The resulting change to valve performance is shown in the *Effect on Valve Flow* chart for a typical EVP valve (10 VDC coil, 0.06" orifice, 25 psig max).


Power Requirements

Power input requirements are specified as supply voltage ranges for each EVP or DVP valve. Supplying voltages outside of these ranges may result in valve malfunctioning. Power requirements are determined by the valve voltage specification.

EVP Valve Type	Input Voltage Range	EVPD Max. Output
0 to 5 VDC	7 to 12 VDC	400 mA
0 to 10 VDC	12 to 28 VDC	200 mA
0 to 20 VDC	14 to 28 VDC	100 mA

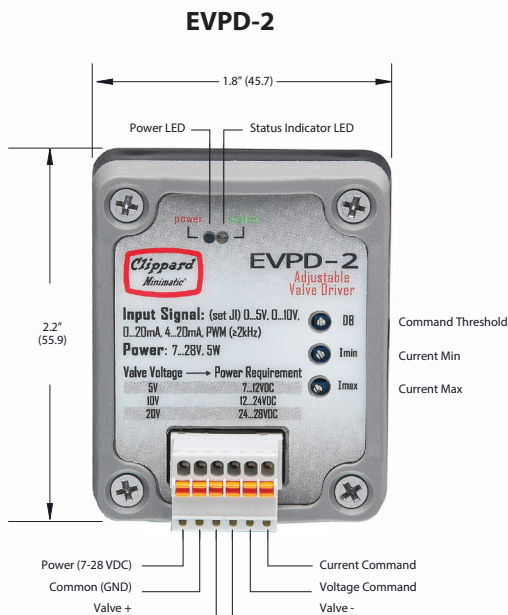

EVPD-1

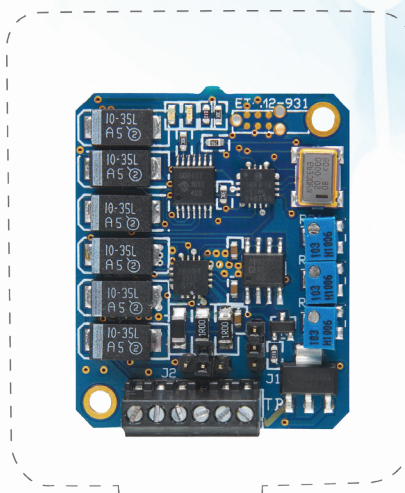


Dimensions shown are in inches (millimeters listed in parentheses).

Visit clippard.com for more detailed 2D and 3D drawings.



Effect on Valve Flow

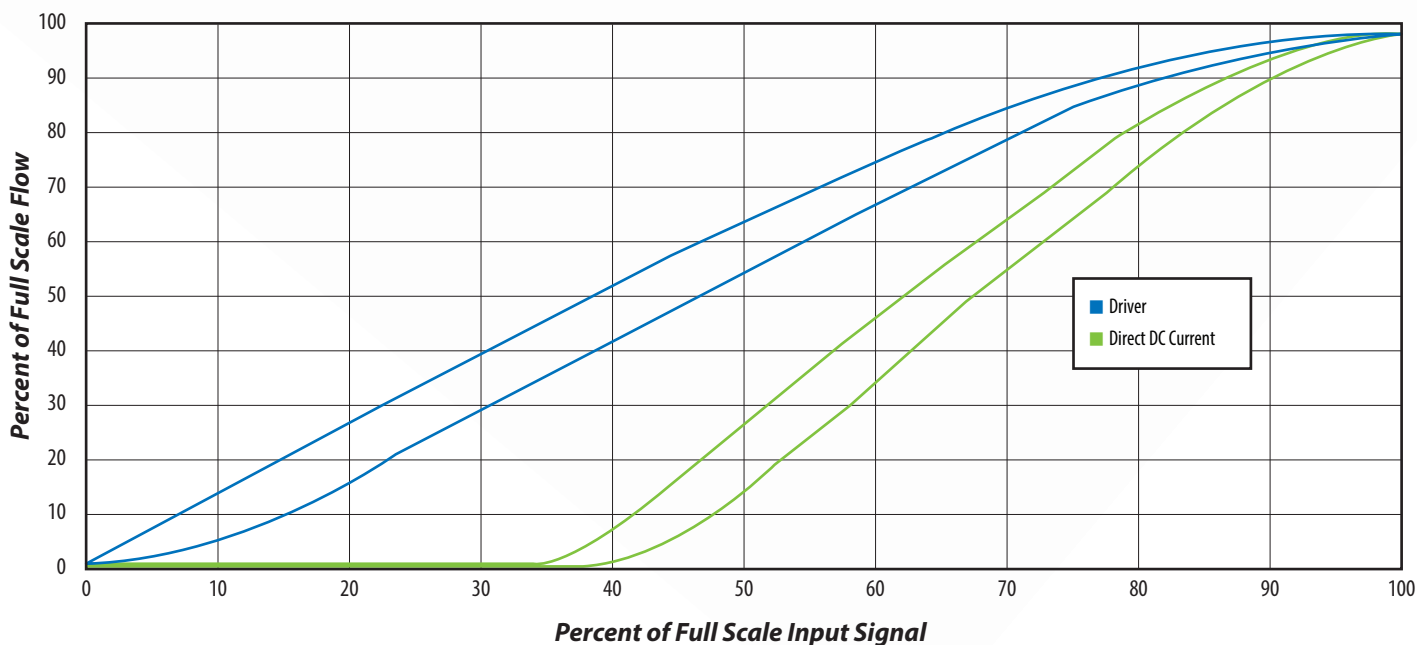

ORDERING INFORMATION

E V P D - □

EVP Driver

- 1 Driver Assembly in Enclosure
- 2 Driver Board
- 2DIN DIN Rail Mounting Clip

Example Part Number:
EVPD-1

For more info, scan the QR code or visit

clippard.com/link/evpd-driver



PV SERIES PROPORTIONAL VALVE




Actual size

These 8 mm proportional direct-acting valves provide precise, linear control for accurate dosing and flow regulation in critical applications. With low power consumption, they offer excellent energy efficiency while maintaining quiet operation and minimal vibration. Their versatile design makes them suitable for a wide range of medical, diagnostic, and industrial applications.


Standard products offered will fit the needs of most applications, however this series can be fully customized according to the user's unique requirements. Consult Clippard with your specific application.

- Ideal for compact assemblies
- Eliminates downstream pulsations
- Smooth proportional delivery
- Low current power / low to no noise
- Exceptional variability of flow vs. command current
- Tiny package with a robust design
- Highly customizable performance


Connection	3.15" (80 mm) wire leads
Current Range	0 to 70 mA
Cycle Life	100 million
Filtration	10 micron
Function	2-way normally-closed proportional
Hysteresis	< 10% of full current
Leak Rate	1.0 sccm
Material, Wetted	Stainless steel, FKM/FFKM
Max. Flow	0.012" (0.3 mm) Orifice: 7.3 ± 0.7 l/min @ 145 psig (10 bar) 0.020" (0.5 mm) Orifice: 7.0 ± 1.0 l/min @ 87 psig (6 bar)
Medium	Air, inert gases
Mount	Cartridge
Nominal Coil Resistance	308 Ω @ 68°F (20°C)
Number of Ports	2
Operating Pressure	0.012" (0.3 mm) Orifice: 0 to 145 psig (10 bar) 0.020" (0.5 mm) Orifice: 0 to 87 psig (6 bar)
Operating Temp. Range	41 to 122°F (5 to 50°C)
Orifice	0.012" (0.3 mm), 0.020" (0.5 mm)
Wattage	1.5 watts @ 68°F (20°C); 2.2 watts max.
More Details	clippard.com/link/pv8

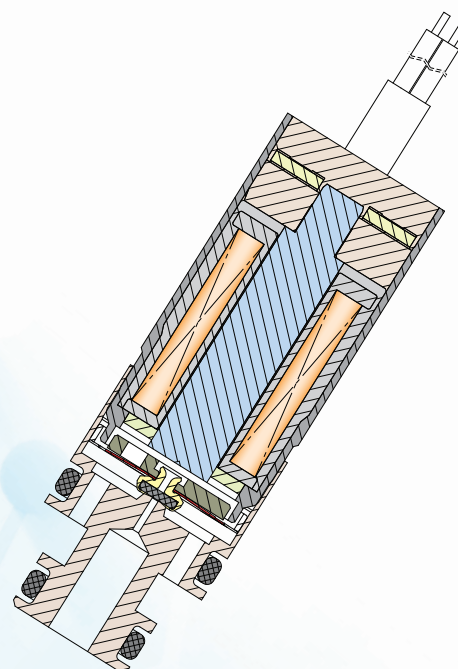


Dimensions shown are in inches (millimeters listed in parentheses).
Visit clippard.com for more detailed 2D and 3D drawings.

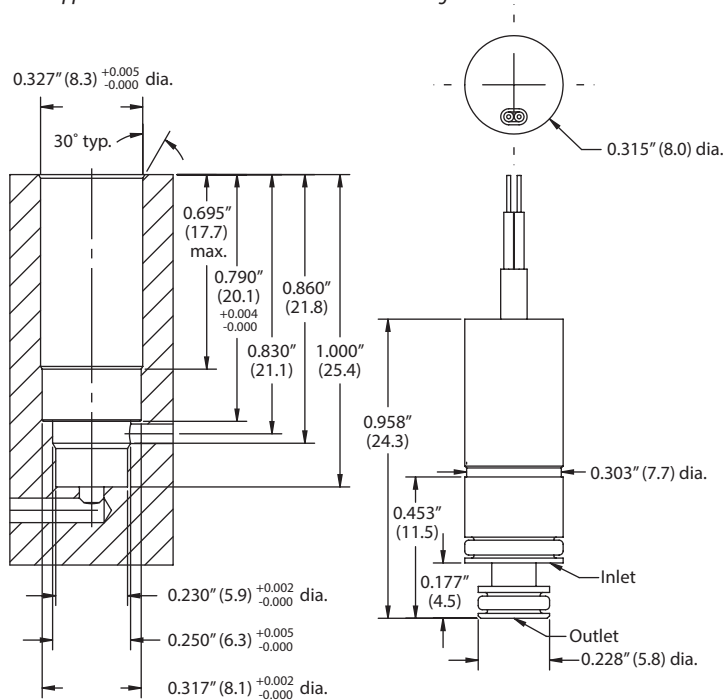


Manifold

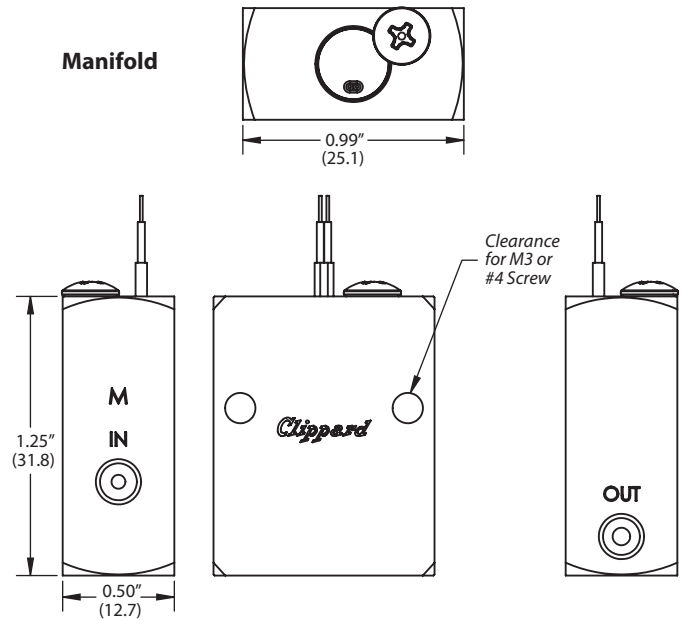

Typical Performance for 0.012" Orifice (Air)

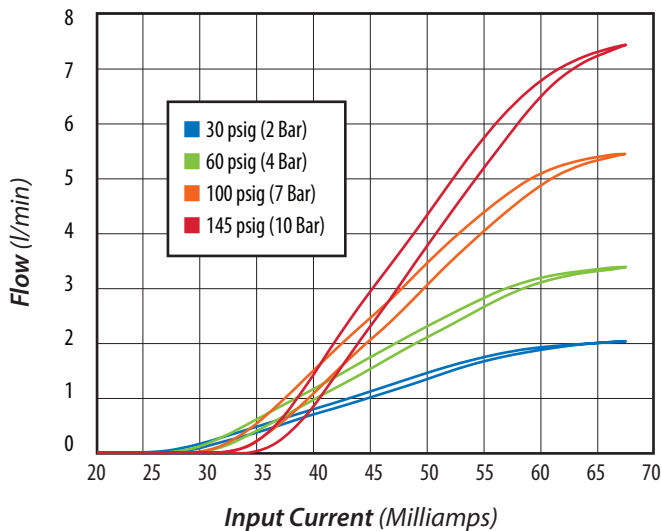

Typical Performance for 0.020" Orifice (Air)

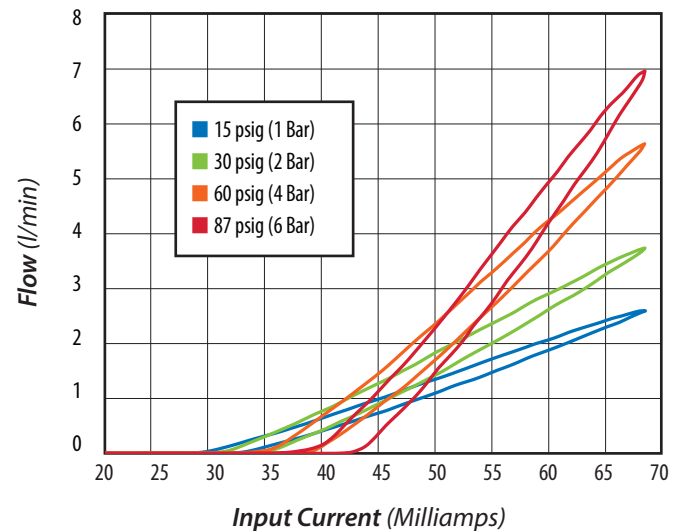

ORDERING INFORMATION

P V 8 -

Pressure Range

- 3 0.012" (0.3 mm) orifice—0 to 145 psig (10 bar)
- 5 0.020" (0.5 mm) orifice—0 to 87 psig (6 bar)

ACCESSORIES

SPM-01* Single-station manifold, #10-32

M-SPM-01* Single-station manifold, M5

*Also available in stainless steel (add -SS to part number)

Example Part Number:

PV8-3

For more info, scan the
QR code or visit
clippard.com/link/pv8



SCPV NEEDLE VALVES



Utilizing the industry's most robust and powerful linear actuator, the SCPV series high flow stepper-controlled proportional valves outperform the competition in performance and durability. These valves are ideal in critical applications such as gas delivery, medical, analytical, and industrial automation requiring high resolution, high flow, and low hysteresis. In addition, the unique design allows for custom flow profiles when required.

Positioning a 3.5° needle through a 0.152" (3.9 mm) orifice in 0.001" (0.03 mm) step increments provides for very linear and repeatable flow control within your application process. Standard models, inline, cartridge, and manifold mounts are ready to go for control of air and other inert gases.


Connection	Connector / wiring harness
Driver	Bipolar chopper drive required
Flow Range	Up to 280 l/min
Flow Resolution	0.7 l/min per step
Linearity	<2.5% of full scale
Material, Wetted	Stainless steel, aluminum, brass, acetal, and FKM
Max. Hysteresis	<2%
Max. psig	100 psig
Medium	Air or compatible gases
Mount	In-line, manifold, or cartridge
Needle	3.5°
Number of Ports	2
Logic Input Voltage	3.3V or 5V jumper selectable
Operating Pressure	Vac. to 100 psig (7 bar)
Operating Temp. Range	32 to 184°F (0 to 84°C)
Operating Voltage	7 to 35 VDC
Port, Inlet	1/8" NPT, manifold, or cartridge
Port, Outlet	1/8" NPT, manifold, or cartridge
Position Resolution	0.001" (0.03 mm) per step
Repeatability	<0.5% of full scale
Response Time	0.95 secs fully-open to fully-closed
Wattage	3.85 watts nominal (<i>only during adjustment—zero power consumption to maintain position</i>)
More Details	clippard.com/link/scpv-series

HIGHLY CUSTOMIZABLE FOR OEM APPLICATIONS


- Flow profiles up to 5,800 l/min
- High flow at low pressure
- Materials such as PEEK or stainless steel
- Special seal materials such as FFKM and others
- Applications for control of water
- Applications that provide zero leak shutoff
- Changing the motor to accommodate an encoder
- Providing specific testing procedures

Contact Clippard to discuss what changes can be made to best fit your application requirements.


Flow Rate (SCPV-1-3 @ 100 psig)

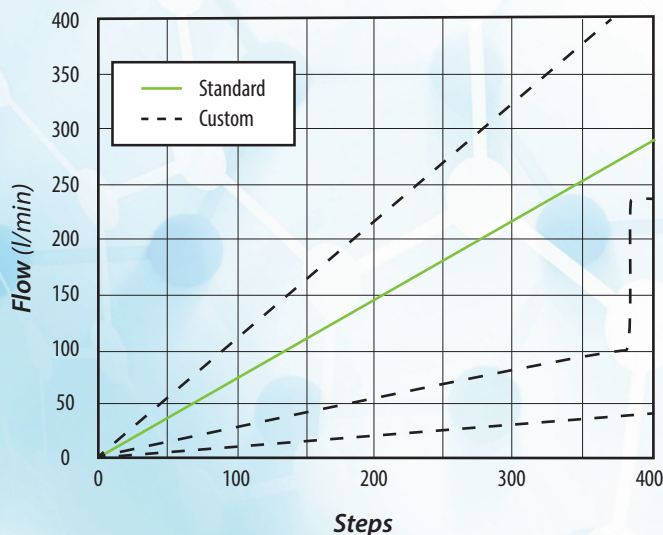


Inline Mount

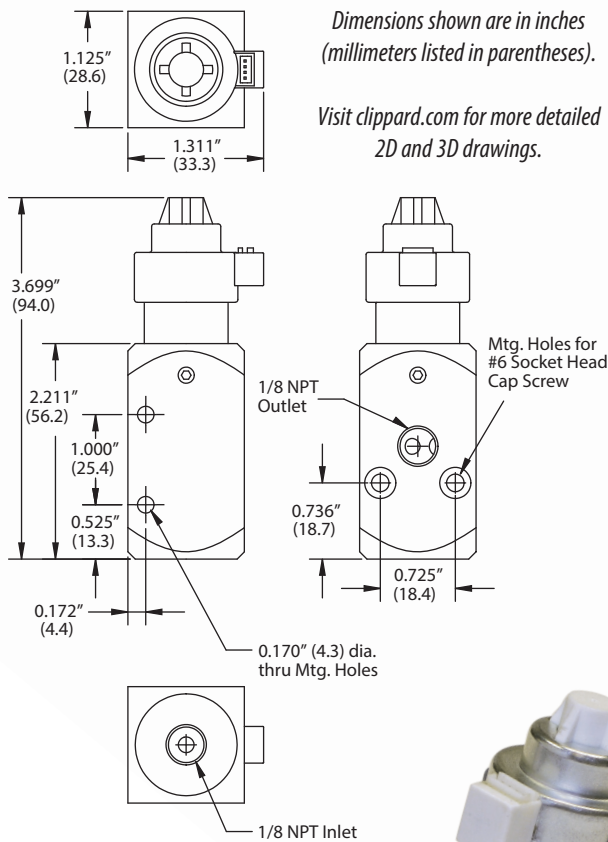

Cartridge Mount

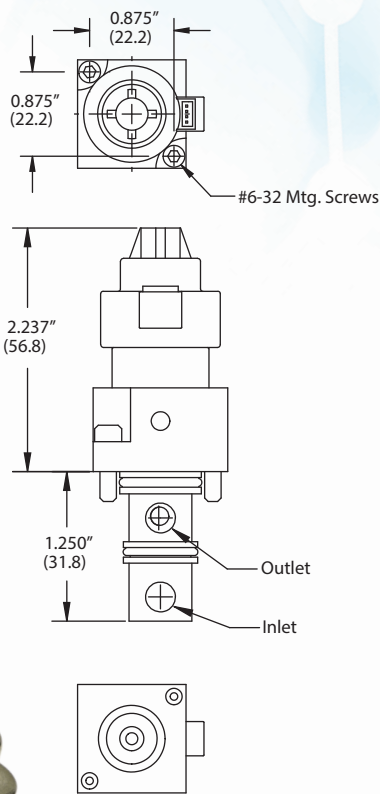

Manifold Mount

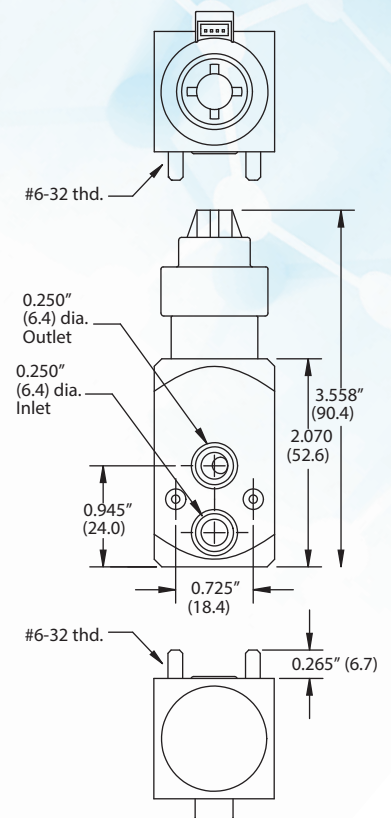


Acetal seat

Customizable stainless steel needle

Anodized aluminum body

Brass housing and internals

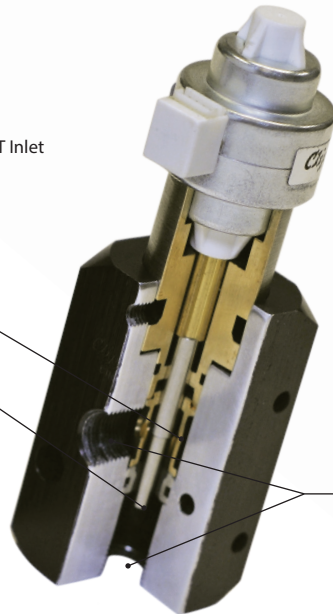


Stepper-controlled linear actuator with acme lead screw

1/8" NPT inlet & outlet ports (SCPV-1-3)

- <2% hysteresis
- Excellent linearity, <2.5% of full-scale
- 2 ms reaction time
- Millions of cycles
- Holds position for power savings or at a loss of power

ORDERING INFORMATION

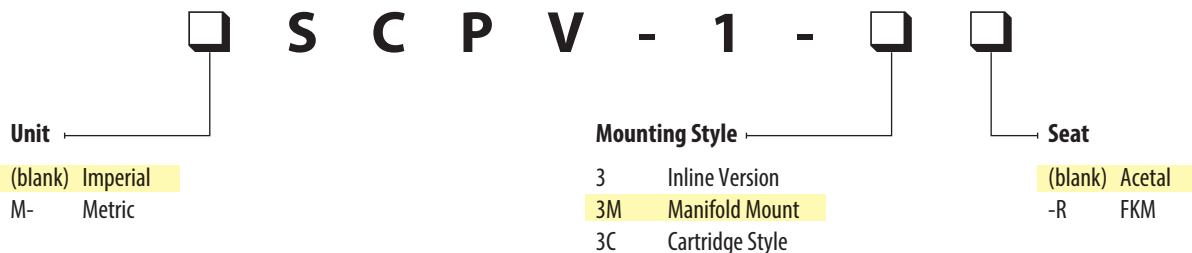

Example Part Number:
SCPV-1-3M

For more info, scan the QR code or visit
clippard.com/link/scpv-series



ECLIPSE PROPORTIONAL ISOLATION VALVE



The Eclipse is a proportional isolation valve like no other. Utilizing patented slide technology, it achieves exceptional proportional flow resolution that far exceeds the competition. Designed for precision, its flow path is fully flushable and composed entirely of inert ceramic, ensuring compatibility with a wide range of media. In addition, the Eclipse features a unique soft start capability that gradually introduces media at a controlled ramp rate to prevent damage or turbulence.





Utilizing a robust and powerful miniature linear actuator, the Eclipse is stepper-controlled, micro-stepping capable, encoder-ready, and its unique design allows for custom flow profiles.

For applications that demand exceptional liquid and gas control, Clippard's Eclipse offers outstanding precision and unrivaled proportional flow resolution.

- **Leak free** (<0.05 sccm typical)
- **Unrivaled resolution**
- **Inert flow path** (all wetted areas ceramic)
- **Soft start prevents damage or turbulence**
- **Zero dead volume** (fully flushable, <0.0009 in³)
- **Excellent linearity** (<4% of full-scale)
- **Fast response** (<2 ms reaction time)
- **Cycle life of typically >1 million cycles**
- **Repeatability <5% of full travel**
- **Bi-directional**

Current	0.49A per phase
Cycle Life	Typically >1 million
Driver	Bipolar chopper drive required
Flow Range	Air: 0 to 7 l/min Water: 0 to 190 ml/min -0 / +10% @ 30 psig (2 bar)
Flow Resolution	Air: 0.000487 l/min (487.5 µl) @ 30 psig (2 bar) Water: 0.0002 l/min (200 µl) @ 30 psig (2 bar)
Linearity	<4% of full-scale
Material, Body	Ceramic
Material, Seals	FKM standard, EPDM and others available
Material, Wetted	Ceramic (others depending on porting option)
Max. Flow	Air: 0 to 7 l/min -0 / +10% Water: 0 to 190 ml/min -0 / +10% @ 30 psig (2 bar)
Max. psig	30 psig (2 bar)
Medium	Liquids and gases
Mount	Manifold or flat bottom (ZDVF)
Number of Ports	2
Operating Pressure	Vac. to 30 psig (2 bar)
Operating Temp. Range	32 to 180°F (0 to 82°C)
Port, Exhaust	None
Port, Inlet	#10-32, Manifold or ZDVF (zero dead volume fitting)
Port, Outlet	#10-32, Manifold or ZDVF (zero dead volume fitting)
Position Resolution	0.00006" (0.0015 mm)
Power Requirement	20 VDC supply to motor @ 30 psig (2 bar)
Proof Pressure	50 psig (3.4 bar)
Response Time	<2 ms
Wattage	2.5 watts nominal (only during adjustment, zero power consumption to maintain position)
More Details	clippard.com/link/eclipse-valve

**This product is highly modifiable for OEM applications, including alternate body materials, flow profiles, and more. Call 877-245-6247 to discuss your needs.*

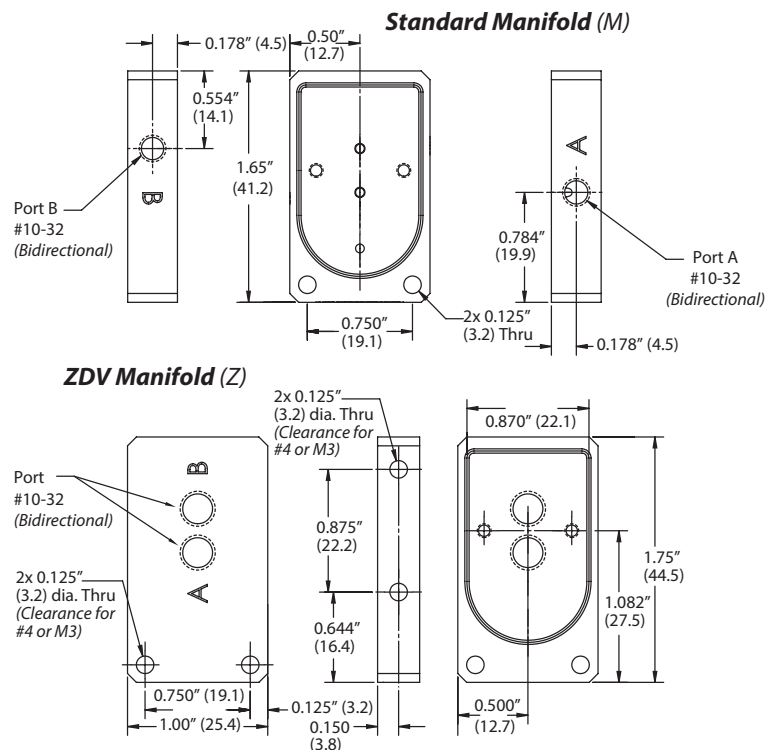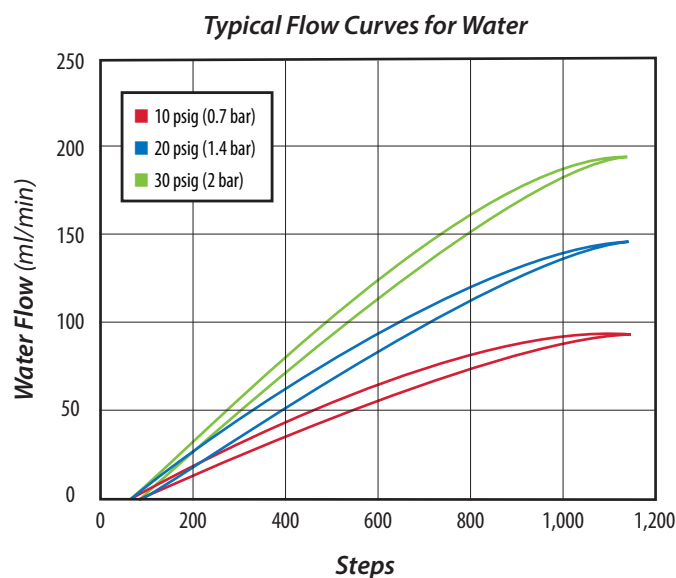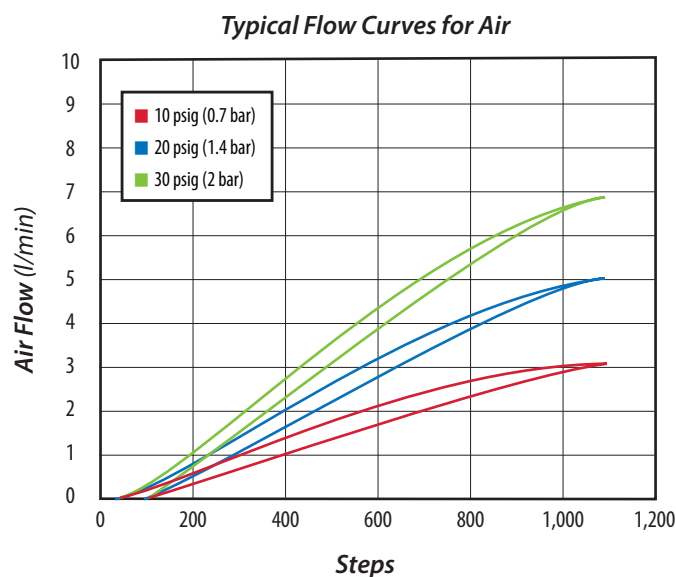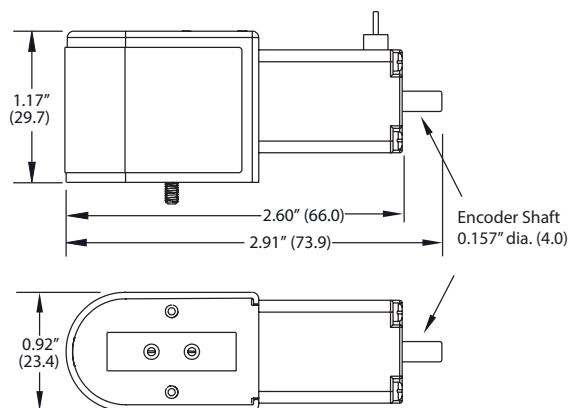

Dimensions shown are in inches (millimeters listed in parentheses).
Visit clippard.com for more detailed 2D and 3D drawings.

ORDERING INFORMATION

E I V U

Porting

M

Manifold

Z

Zero Dead Volume Manifold

Seals

(blank) ZDVF porting

-V FKM

Encoder Shaft

-ENS Encoder shaft (standard)

(blank) No encoder shaft

Accessories

EUM-01	Single-Station Manifold, #10-32
M-EUM-01	Single-Station Manifold, M5x0.8
SCPVD-1	Bipolar Chopper Driver
ZDVF-18	Headless 1/4-28 Flatbottom Fitting, 1/8\" (3.2 mm) OD (IDEX p/n XP-348)

Also Recommended: Miniature optical encoder from US
Digital for 4 mm bore with metric screws (p/n E4T)

Example Part Number:


EIVU-M-V-ENS

For more info, scan the
QR code or visit

clippard.com/link/eclipse-valve




SCPV DRIVER

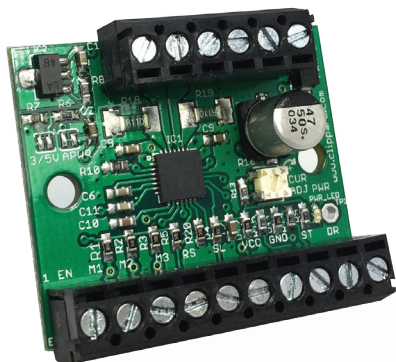

Current / Phase	385 mA
Inductance / Phase	8.08 mH
Insulation Resistance	20M ohms
Motor Voltage	5 VDC
Resistance / Phase	13 ohms
Temperature Rise	135°F (57°C)
Wattage	3.85 watts
More Details	clippard.com/link/scpvd-driver

**This product is highly modifiable for OEM applications—including alternate body materials, flow profiles, and more. Call 877-245-6247 to discuss your needs.*

The SCPVD is a bi-polar stepper motor driver board which can be used for stepper motors up to a max 2A/phase. It is based on the Allegro A4988 motor driver. The driver requires a motor drive voltage of 7 to 35 volts. An external controller is required to deliver step and direction signals to the driver board. The SCPVD is capable of microstepping and defaults to a 16th step micro-stepping mode. The step mode as well as several other options such as sleep, enable, and reset can be toggled on and off.

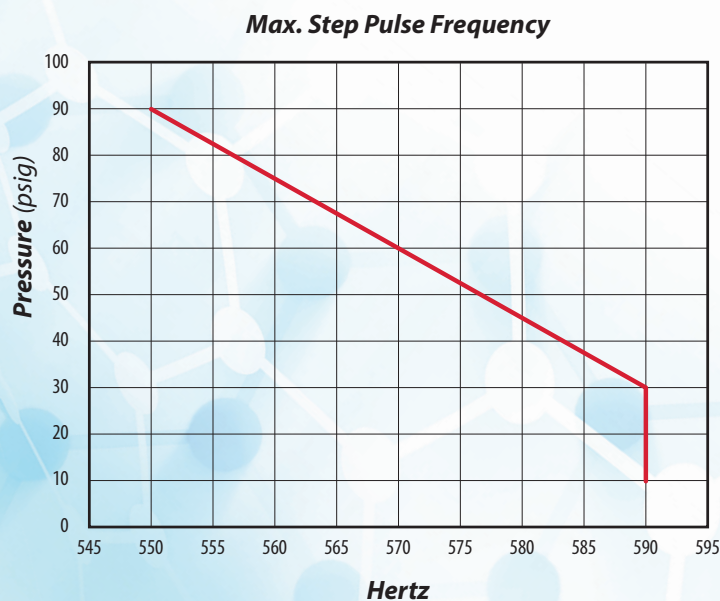


For Use with Clippard's

**SCPV Series
Stepper-Controlled
Proportional Valve**

and/or

**Eclipse Proportional
Isolation Valve**




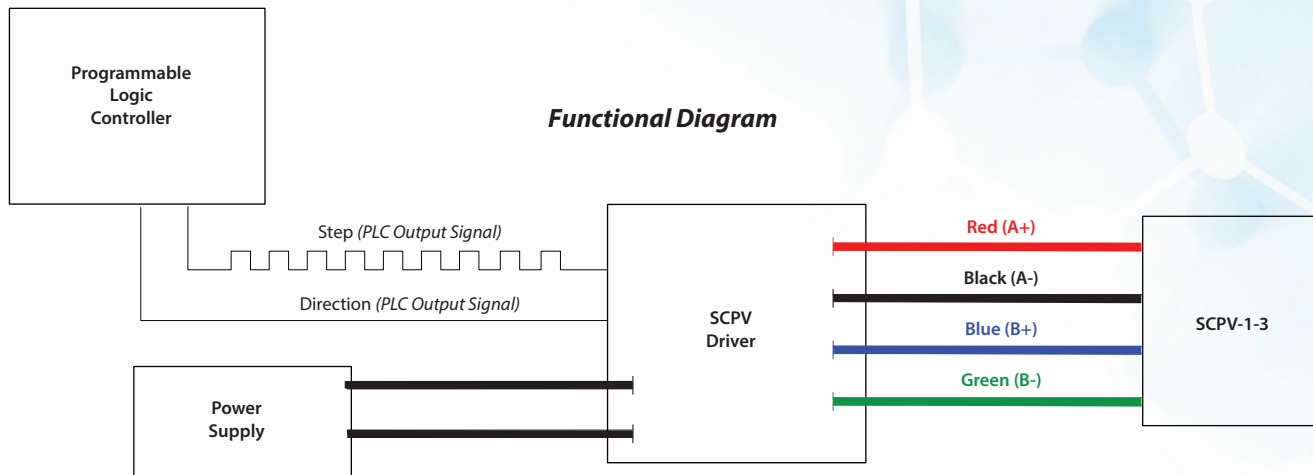

Applications

- Analytical instruments
- Blood pressure monitoring
- Precise pressure control
- Patient simulators
- Gas controllers
- Mass flow control
- Gas chromatography
- Respirators / ventilators

- +7 to +35 VDC supply voltage
- Max. 2A / phase
- 1/16, 1/8, 1/4, 1/2, and full step modes
- 5V or 3.3V logic inputs (jumper selectable)
- LED power supply indicator light
- Crossover current protection
- Thermal shutdown circuitry

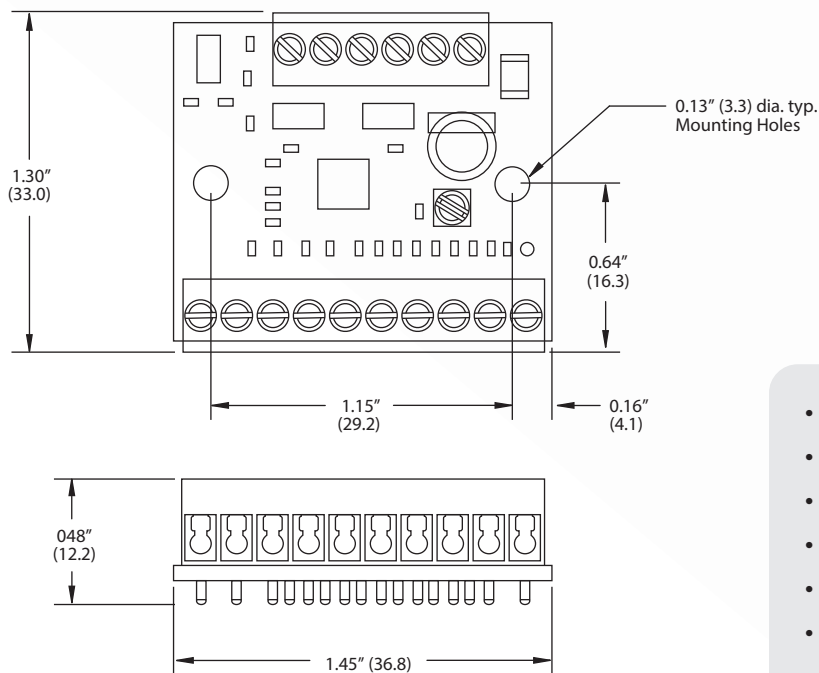

Dimensions shown are in inches (millimeters listed in parentheses).

ORDERING INFORMATION

SCPVD - 1

Example Part Number:

SCPVD-1

For more info, scan the
QR code or visit

clippard.com/link/scpvd-driver



PRECISION CONTROL SOLUTIONS



ELECTRONIC VALVES

Clippard revolutionized the electronic valve market in the early 1970s with the EV series, which quickly became the industry standard for life and reliability. This unparalleled history in providing new and innovative products continues today, aided by advanced manufacturing machines and techniques.

clippard.com/link/elec-valves



PROPORTIONAL VALVES

For optimal controllability, proportional valves provide output proportional to input. These types of valves are ideal for applications which require variable flow control.

clippard.com/link/prop-valves



ISOLATION VALVES

Media isolation valves are used for a wide variety of applications, including those that require precise, repeatable dispensing for medical and analytical instrumentation. Choose from a large variety of sizes, configurations, materials, and options or contact us to discuss special customizations.

clippard.com/link/isolation-valves



CONTROL VALVES

From flow controls to needle valves, check valves, shuttle valves, exhaust valves and more, Clippard's control valves are available in a wide range configurations and functions. Sizes range from #3-56 and #10-32 through 3/8" NPT, for pressures up to 300 psig.

clippard.com/link/control-valves



DIRECTIONAL CONTROL VALVES

Clippard's line of mechanically-operated directional control valves includes toggle, stem, and lever valves as well as hand and foot-actuated pedal valves, palm button valves, and more. Choose from #3-56, #10-32, 1/8" NPT or 1/4" NPT ports.

clippard.com/link/directional-valves



AIR PILOT VALVES

The force output of an air pilot is much more powerful than the power produced from electrical solenoids or actuators. This makes air pilot valves ideal for applications where higher air flow and/or lower power are required, as well as when simplicity and cost savings are important.

clippard.com/link/air-pilot-valves



ELECTRONIC CONTROLS

Clippard's Cordis series is a highly-customizable line of electronic controls designed to help close the loop around pressure and flow. With unparalleled accuracy and resolution, this line will elevate your application to the next level. Take control like never before with the Cordis.

clippard.com/link/elec-controls



PRESSURE REGULATORS

Regulators are offered in either relieving or non-relieving versions with a large variety of adjustment options and mounting styles to choose from. For even greater precision control, check out Clippard's Cordis line of electronic pressure regulators.

clippard.com/link/press-reg



CUSTOM SOLUTIONS

Clippard excels at designing special variations, modifications, and completely custom valves, fittings, and assemblies. If you need a product that fits your application perfectly, we will work with you to design or modify products to suit your exact needs.

clippard.com/link/custom



AIR PREP EQUIPMENT

Pneumatic applications with properly conditioned air will operate longer, cost less, and improve system efficiency. Clippard's line includes filters, regulators, lubricators, and combination units from #10-32 up to 1". A modular design and interconnecting hardware simplifies installation and maintenance.

clippard.com/link/air-prep



FITTINGS

Small in size but large in performance, Clippard precision fittings are designed to save you time, space, and money when designing versatile, efficient, trouble-free circuits. Choose from an endless variety in several different styles including push-quick, slip-on, barb, and quick connect.

clippard.com/link/fittings



HOSE & TUBING

Choose from a large variety of miniature hose and tubing, including copper and nylon tubing, flexible urethane and vinyl hose and tubing, and food-, medical-, or laboratory-grade silicone tubing.

clippard.com/link/tubing

Clippard products are distributed through our worldwide network of sales and engineering specialists. All of our representatives are stocking distributors and keep a variety of Clippard products on hand to fill your immediate needs. Each of our distributors are backed by our own large inventory to ensure quick delivery.

To locate your nearest distributor, call 877-245-6247 or visit clippard.com/distributors



ELECTRONIC VALVES

PROPORTIONAL VALVES

ISOLATION VALVES

ELECTRONIC CONTROLS

CUSTOM SOLUTIONS

PRESSURE REGULATORS

CONTROL VALVES

DIRECTIONAL CONTROL VALVES

AIR PILOT VALVES

AIR PREPARATION EQUIPMENT

FITTINGS, HOSE, & TUBING



*Scan QR code or visit
clippard.com/link/request-literature
to request additional literature.*



Clippard

United States

1-877-245-6247

Europe

+32 10-45-21-34

China

+86 137-9527-9010

DISTRIBUTED BY: