




Straight Barb Connector Fittings

11782-5-ENP-BLK

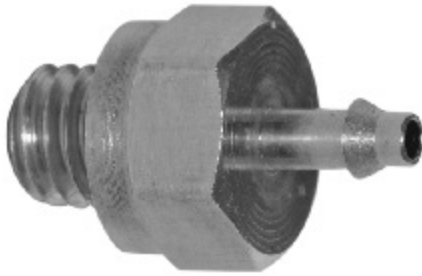

Minimatic barb fittings provide a flexible, easy alternative to ferrule and push-to-connect/push-quick fittings. Designed for use with urethane hose, barb fittings will provide a leak-free connection that will hold well behind the working pressure of the hose without the need for additional clamps.

Accessories	If ordering bulk, seals must be ordered separately: Nitrile: 11761-2 , FKM: 11761-8 , Nylon 11761-4
Bottom Port	#10-32 O-Ring Seal 5/16 Hex
Clippard Tubing	1/16" I.D. Tubing
Fitting Material	Electroless Nickel Brass
Hex Size	5/16" Hex
Packaging	Bulk-250 pc., Seals Ord. Sep.
Product Line Brochure	Mechanical Valves
Seal	O-Ring
Seal Material	Nitrile
Seals	Captivated O-Ring
Top Port	1/16" Hose Barb
Weight (lbs.)	0.0050

