Straight Barb Connector Fittings

11792-4-PKG

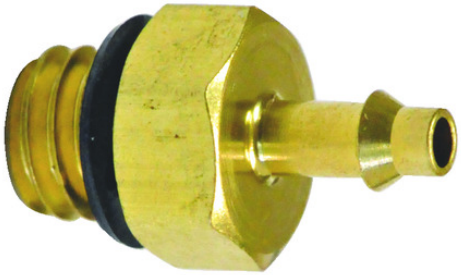

Minimatic barb fittings provide a flexile, easy alternative to ferrule and push-to-connect/push-quick fittings. Designed for use with urethane hose, barb fittings will provide a leak-free connection that will hold well behond the working pressure of the hose without the need for additional clamps.

Accessories	If ordering bulk, seals must be ordered separately: Nitrile: 11761-2, FKM: 11761-8, Nylon 11761-4
Bottom Port	#10-32 O-Ring Seal 1/4 Hex
Clippard Tubing	1/8" I.D. Tubing
Fitting Material	Brass
Hex Size	1/4" Hex
Packaging	Package
Product Line Brochure	Mechanical Valves
Seal	O-Ring
Seal Material	Nitrile
Seals	Captivated Nitrile O-Ring Furnished
Top Port	1/8" Hose Barb
Weight (lbs.)	0.0050

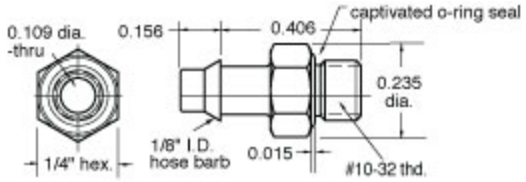
0.109 dia.
-thru
0.156
0.406
captivated o-ring seal
0.235
dia.
1/8" I.D.
hose barb
0.015
1/4" hex.
#10-32 thd.