


## Straight Barb Connector Fittings

### 2CP3-ENP-PKG

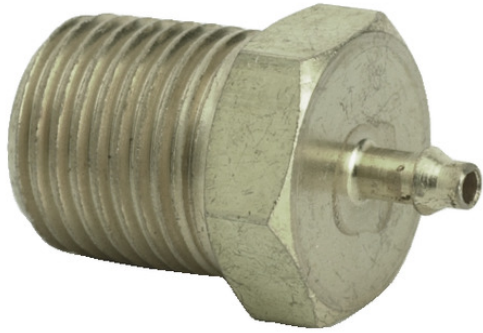

Minimatic barb fittings provide a flexible, easy alternative to ferrule and push-to-connect/push-quick fittings. Designed for use with urethane hose, barb fittings will provide a leak-free connection that will hold well behind the working pressure of the hose without the need for additional clamps.

<b>Accessories</b>	If ordering bulk, seals must be ordered separately: Nitrile: <a href="#">11761-2</a> , FKM: <a href="#">11761-8</a> , Nylon <a href="#">11761-4</a>
<b>Bottom Port</b>	1/8" NPT
<b>Clippard Tubing</b>	<a href="#">3/32" I.D. Tubing</a>
<b>Fitting Material</b>	Electroless Nickel Brass
<b>Hex Size</b>	7/16" Hex
<b>Packaging</b>	Package
<b>Product Line Brochure</b>	<a href="#">Mechanical Valves</a>
<b>Thread</b>	1/8" NPT
<b>Top Port</b>	3/32" Hose Barb
<b>Weight (lbs.)</b>	0.0050

