




Cordis Electronic Flow Controller

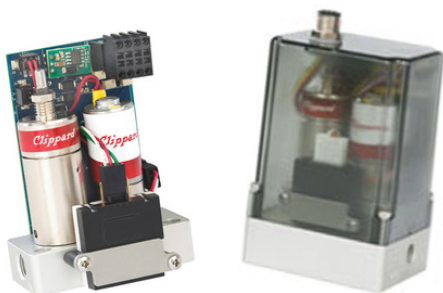

The Cordis Flow Controller utilizes an extremely fast-reacting MEMS technology sensor upstream from Clippard's proportional valve. Unlike other mass flow controllers, the Cordis flow controller requires less than one minute warm-up, features a pressure drop $\leq 14"$ H₂O, and includes flow ranges as low as 0 to 30 sccm. Standard control options include 0.2 to 10 VDC, 4.32 to 20 mA, and 3.3 VDC Serial. IP65 housing available for light industrial applications.

**Note	Please consult factory for current pricing
2D File	2D File
Accuracy	$\leq 2\%$ of Full Scale
Applications	Applications Form
Current Draw	≤ 250 mA max.
Data Sheet	Data Sheet
Filtration	40 micron (recommended)
Flow Range	Minimum: 0 to 15 sccm, Maximum: 0 to 6 l/min
Function	Normally-Closed Proportional
Hysteresis	$\leq 1\%$
Linearity	$\leq 1\%$
Material, Manifold	Anodized Aluminum
Material, Sensor	Polyamide
Max. Inlet	60 psig (4 bar)
Medium	Clean, Dry, Non-Corrosive Gases
Mounting Attitude	Any
Operating Instructions	Operating Instructions
Operating Temperature Range	Proportional Valve: 32° to 120°F (0 to 49°C)
Pressure Drop	$\leq 14"$ H ₂ O
Product Line Brochure	Cordis Electronic Controls
Repeatability	$\leq 1\%$
Resolution	≤ 25 mV
Response Time	<50 ms (application dependent)
Turndown Ratio	50:1
Voltage	15 to 24 VDC
Warm-Up Period	<1 Minute
Weight (lbs.)	0.4000

