




## Straight Barb Connector Fittings

CT3-BLK

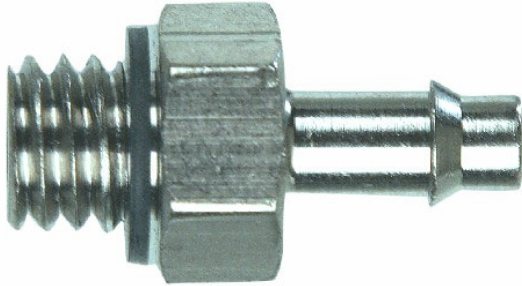

Minimatic barb fittings provide a flexible, easy alternative to ferrule and push-to-connect/push-quick fittings. Designed for use with urethane hose, barb fittings will provide a leak-free connection that will hold well beyond the working pressure of the hose without the need for additional clamps.

|                              |                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Accessories</b>           | If ordering bulk, seals must be ordered separately: Nitrile: <a href="#">11761-2</a> , FKM: <a href="#">11761-8</a> , Nylon <a href="#">11761-4</a> |
| <b>Bottom Port</b>           | #10-32 Male Thread                                                                                                                                  |
| <b>Clippard Tubing</b>       | <a href="#">3/32" I.D. Tubing</a>                                                                                                                   |
| <b>Fitting Material</b>      | Electroless Nickel Brass                                                                                                                            |
| <b>Hex Size</b>              | 1/4" Hex                                                                                                                                            |
| <b>Packaging</b>             | Bulk-250 pc., Seals Ord. Sep.                                                                                                                       |
| <b>Product Line Brochure</b> | <a href="#">Mechanical Valves</a>                                                                                                                   |
| <b>Seal</b>                  | Gasket                                                                                                                                              |
| <b>Seal Material</b>         | Nitrile                                                                                                                                             |
| <b>Seals</b>                 | Nitrile Gasket Ordered Separately #11761-2                                                                                                          |
| <b>Top Port</b>              | 3/32" Hose Barb                                                                                                                                     |
| <b>Weight (lbs.)</b>         | 0.0050                                                                                                                                              |

