

15 mm Valves


E2L15F-4W024




Offered in both Normally-Open or Normally-Closed models, these 2-way and 3-way valves are perfect for small areas where compact electronically-controlled pneumatics are needed.

This series has a high strength, engineered light-weight glass filled nylon body, along with stainless steel, copper and Buna-N, making it suitable for a broad range of applications. With exceptional life and reliability this is the perfect sub-miniature valve for tomorrow's needs in a wide variety of industries.

2D Drawings	Valves, Plastic Manifolds, Aluminum Manifolds
Connection	24 AWG Wire Leads, 11.8"
Connector Wire	3-Wire Molded Cord, 24 AWG, 300 mm length, 4.5 mm external jacket; tinned copper wires; silicone jacket and conductor insulation.
Connectors	Connectors
Documentation	CE, RoHS, REACH (Download)
Function	2-Way Latching
Length	1.08
Manifolds	Plastic Barb, Aluminum
Materials	Stainless steel core & springs, nylon body, FKM dynamic seals, and Nitrile gasket & static seals. FKM gasket & static seals available
Max. Flow	85 l/min @ 100 psig (7 bar)
Medium	Air, Water, Gas & Compatible Fluids
Mount	2 M3 Screws
Operating Temperature Range	23 to 122°F (-5 to 50°C) When below 32°F, must use clean, dry air.
Product Line Brochure	10 & 15 mm Valves
Response Time	10 ms nominal
Voltage	24 VDC
Voltage Tolerance	±10%
Wattage	4.0 Watts
Weight (lbs.)	0.0850

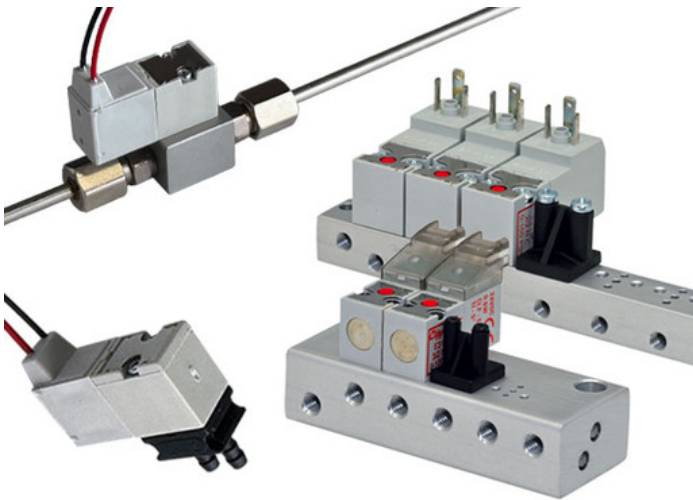

COIL DIRECTION

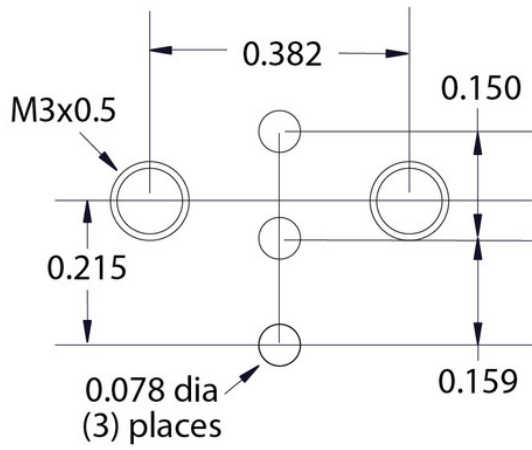

Typical Air Flow

