

Clippard

15 mm Valves

E315E-2W24A





Offered in both Normally-Open or Normally-Closed models, these 2-way and 3-way valves are perfect for small areas where compact electronically-controlled pneumatics are needed.

This series has a high strength, engineered light-weight glass filled nylon body, along with stainless steel, copper and Buna-N, making it suitable for a broad range of applications. With exceptional life and reliability this is the perfect sub-miniature valve for tomorrow's needs in a wide variety of industries.

| | |
|------------------------------------|---|
| 2D Drawings | Valves, Plastic Manifolds, Aluminum Manifolds |
| Connection | 24 AWG Wire Leads, 11.8" |
| Connector Wire | Wire Leads, 24 AWG |
| Connectors | Connectors |
| Documentation | CE, RoHS, REACH (Download) |
| Function | 3-Way Normally-Closed |
| Manifolds | Plastic Barb, Aluminum |
| Materials | Stainless steel core & springs, nylon body, FKM dynamic seals, and Nitrile gasket & static seals. FKM gasket & static seals available |
| Max. Flow | 84 l/min @ 145 psig (10 bar) |
| Medium | Air, Water, Gas & Compatible Fluids |
| Mount | 2 M3 screws |
| Operating Temperature Range | 23 to 122°F (-5 to 50°C) When below 32°F, must use clean, dry air. |
| Product Line Brochure | 10 & 15 mm Valves |
| Response Time | 6 ms nominal |
| Voltage | 24 VAC |
| Voltage Tolerance | ±10% |
| Wattage | 2.0 Watts |
| Weight (lbs.) | 0.0850 |



FUNCTIONAL SCHEMATICS

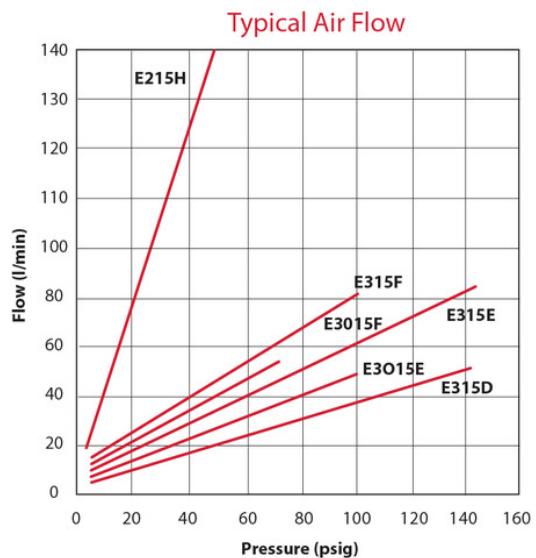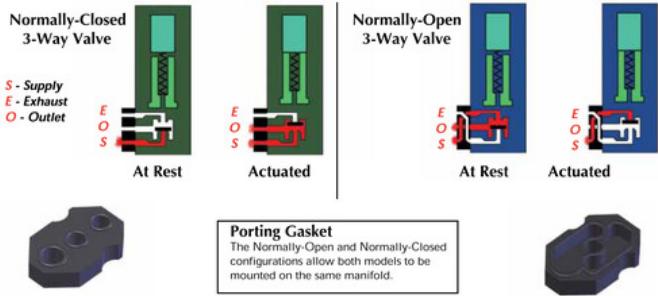

COIL DIRECTION

