

# Clippard

## NPV Electronic Pinch Valves


FPV4L-1C-06-24-2



The NPV Series Pinch Valve is a solenoid-operated device that is designed to open and close tubes for controlling flow of liquids and gases. Other valve types have internal passages that may cause small amounts of fluid to remain in the valve. Pinch valves have no areas or dead volume where fluid can become trapped. Only the inside of the tubing contacts the fluid. Energizing the solenoid retracts or attracts the plunger, which opens or closes the tube. De-energizing the solenoid will allow the plunger to return to its original state.

<b>Applications Form</b>	<a href="#">Applications Form</a>
<b>Circuitry Option</b>	State Feedback
<b>Connection</b>	18" (45 cm) Wire Leads
<b>Data Sheet</b>	<a href="#">Data Sheet</a> , <a href="#">Hit &amp; Hold Info</a> , <a href="#">State Feedback Info</a> , <a href="#">Panel Mount Info</a>
<b>Documentation</b>	CE, RoHs ( <a href="#">Download</a> )
<b>Function</b>	2-Way Normally-Closed (1 Tube)
<b>Material, Tubing</b>	Sanitary Platinum-Cured Silicone
<b>Material, Wetted</b>	Silicone Tubing (no wetted areas in valve)
<b>Max PSI</b>	20 psig (1.4 bar)
<b>Medium</b>	Air, Water, Gas & Compatible Fluids
<b>Mount</b>	In-Line
<b>Mounting</b>	#2-56 or #4-40 manifold. M3 also available.
<b>Operating Pressure</b>	0 to 30 psig (0 to 2 bar) with standard medical/lab grade silicone tubing
<b>Operating Temperature Range</b>	-20 to 158°F (-29 to 70°C)
<b>Product Line Brochure</b>	<a href="#">Isolation Valves</a>
<b>Response Time</b>	50 ms
<b>State Feedback Voltage</b>	24
<b>Thread Depth</b>	#4-40 (max. 0.125")
<b>Tubing</b>	3/16" ID-5/16" OD, Medical
<b>Tubing, Durometer Hardness</b>	50 Shore A
<b>Tubing, Elongation at Break</b>	815%
<b>Tubing, Length</b>	Comes with 12" (30 cm) of selected tubing. Additional tubing available separately.
<b>Tubing, Modulus at 200%</b>	299 psi (21 bar)
<b>Tubing, Tear Strength</b>	263 ppi
<b>Tubing, Tensile Strength at Break</b>	1,388 psi (96 bar)
<b>Tubing, Wall Thickness</b>	0.0625" (1.6 mm)
<b>Unit</b>	Imperial
<b>Voltage</b>	24 VDC
<b>Wattage</b>	7.2 Watts
<b>Weight (lbs.)</b>	0.4000

## FEEDBACK SIGNAL LEVELS

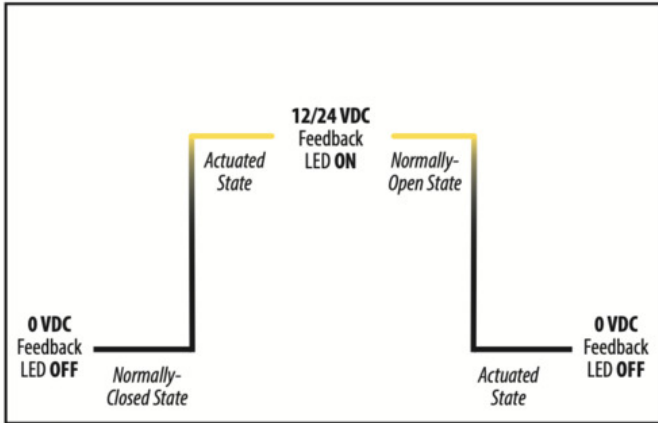

**NPV-P**  
Panel Mounted Pinch Valves

**NPV7**  
Long Stroke Pinch Valve

**NPV**  
Standard Pinch Valves

13" (330.2) Wire Leads, Stripped & Tinned

**WIRING DIAGRAM**

- State Feedback—12 or 24 VDC (valve VDC)
- Ground
- Trigger—Hit Hold triggering input, 2.3-24 VDC
- Valve Voltage—12 or 24 VDC depending on valve coil selected

### DIMENSIONS, NPV-P (Panel Mounted Pinch Valves)

Model	2	3	4	7
A	1.41" dia. (36.8)	1.70" dia. (43.1)	1.94" dia. (49.4)	1.75" dia. (44.5)
B	1.00" dia. (25.4)	1.25" dia. (31.7)	1.50" dia. (38.1)	1.50" dia. (38.1)
C	2.63" (66.9)	3.04" (77.2)	3.42" (87.0)	5.33" (125.4)
D	0.89" (22.3)	1.04" (26.4)	1.32" (33.6)	1.18" (30.0)
E	0.72" (18.3)	0.72" (18.3)	0.84" (20.8)	0.84" (20.8)

### DIMENSIONS, NPV (Standard Pinch Valves)

Model	2	3	4
A	1.00" dia. (25.4)	1.25" dia. (31.7)	1.50" dia. (38.1)
B	2.04" (51.8)	2.44" (61.9)	2.79" (70.8)
C	0.72" (18.3)	0.72" (18.3)	0.84" (20.8)

Dimensions shown are in inches (millimeters listed in parentheses) and are for reference purposes only.

Visit [clippard.com](http://clippard.com) for more detailed 2D and 3D drawings and installation instructions.

## ORDERING INFORMATION

**F P V L - - - -**

**Model**

- 2 1.00" dia., 1.5 W
- 3 1.25" dia., 4.2 W
- 4 1.50" dia., 7.2 W
- 7 1.50" dia., 7.2 W

**Function**

- 1O 2-Way Normally-Open
- 1C 2-Way Normally-Closed

**Mount**

- (blank) Standard
- P Panel Mount

**Valve Voltage**

- 12 12 VDC
- 24 24 VDC

**SF Voltage**

- 1 12 VDC
- 2 24 VDC

Example Part Number: **FPV2L-1O-03-12-1**

Refer to NPV data sheet or online configurator for tubing info

For more info, scan the QR code or visit [clippard.com/link/state-feedback](http://clippard.com/link/state-feedback)