


GNV Needle Valves

GNV-3KC

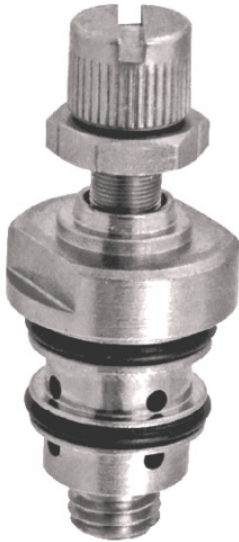

Needle Valves are used to control the rate of flow in a pneumatic system by controlling flow in both directions. Material enters the input port, travels through an adjustable orifice and out the output port.

| | |
|------------------------------|--|
| 2D File | 2D File |
| Adjustment | Knurled Knob |
| Air Flow | 310 l/min @ 100 psig |
| Input PSI | 300 psig (21 bar) max. |
| Material | Electroless Nickel Plated Brass Needle & Body, Anodized Aluminum Housing |
| Material, Seals | Nitrile |
| Medium | Air, Water or Oil |
| Mount (Threads) | Cartridge (Flow 3) |
| Notes | GNV-3 Series features a stainless steel needle. |
| Product Line Brochure | Mechanical Valves |
| Technical Data Sheet | Data Sheet |
| Weight (lbs.) | 0.2500 |

