




#10-32 & 1/8" NPT Valves

M-FTV-3P

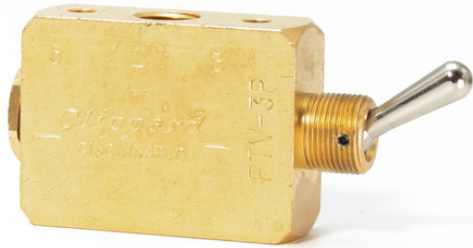

3-Way, 2 Position FTV valves have a supply, outlet and exhaust port. When the toggle is in the "on" position air flows from the inlet to the outlet and the exhaust port is blocked. Moving the toggle to the "off" position closes the inlet and opens the outlet to an exhaust port which vents the outlet to atmosphere. 3-Way toggle valves may have a poppet or spool and by movement of the toggle may either be 2-position or have a momentary actuation.

Air Flow	185 L/min @ 3.4 bar; 300 L/min @ 7 bar
Force to Rotate Toggle	16 oz. Nominal
Included Item(s)	Nuts & Lockwashers
Material, Body	Brass
Material, Seals	Nitrile Std., FKM Optional
Material, Spring	Stainless Steel Spring & Stem
Material, Toggle	Nickel-Plated Steel
Max PSI	10.3 bar
Medium	Air
Mount	#15/32-32 Thread
Note	ENP Plating Available. Add "-ENP" Suffix
Operating Temperature Range	32 to 230°F
Ports	G1/8
Product Line Brochure	Mechanical Valves
Unit	Metric
Weight (lbs.)	0.2800

