


#10-32 Valves

M-MCV-1AB

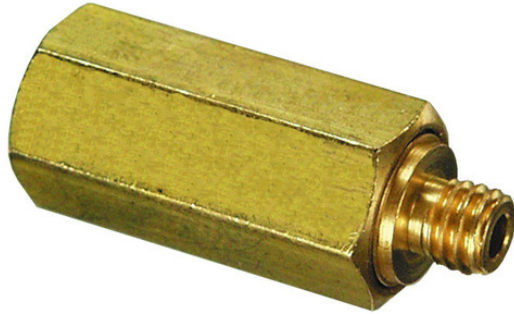

Check valves permit flow in one direction only. The MCV series is available with #10-32 ports and are constructed of bright-dipped brass bodies that provide in-line mounting.

Flow	6.5 l/min @ 50 psig (3.4 bar); 325 l/min @ 100 psig (7 bar)
Input PSI	300 psig (21 bar) max.
Length	1.25
Material, Body	Brass
Material, Seals	Nitrile
Material, Spring	Stainless Steel
Medium	Air
Mount	Direct or In-Line
Note	Not intended for pressure relief. Arrow on valve indicates direction of flow.
Operating Temperature Range	32 to 230°F
Ports (Inlet - Outlet)	#10-32 (Female - Male)
Pressure to Open	Cracks @ approx. 1 psig (0.07 bar)
Product Line Brochure	Mechanical Valves
Unit	Metric
Weight (lbs.)	0.0300

